



Oregon State University

Examining the Effectiveness of Commercial RFID Tags as Soil Moisture Sensors

Brett Stoddard¹; Dr. John Selker², PhD; Dr. Chet Udell², PhD

¹Openly Published Environmental Sensing Lab, ²College of Engineering/College of Ag. Science, Department of Ecological & Biological Engineering



Abstract

- Current soil moisture sensors have several drawbacks such as high costs, poor scalability, and poor mobility
- An incredibly cheap, low-maintenance, wireless, high-resolution system for sensing soil moisture would be possible using RFID tags
- The RFID tags discussed here, SmarTrac's Dogbone, have been used in many industries and are commercially available at a cost of 12¢ per tag¹



Close up of SmarTrac's Dogbone RFID tag with the moisture sensitive area circled in red.

Methods

The RFID tags measure moisture indirectly from the electrical permittivity (ϵ_r) of their environment.¹ By comparing their sensor values to an industry standard Decagon 5TM capacitance probe, a model can be created mapping the RFID tag's sensor value to soil moisture.

For the tests, both the RFID tag and 5TM probe were buried 4 in deep in a homogenous mixture of sandy loam soil. Data from the RFID tag and 5TM probe were read for 5 minute intervals multiple times at a given moisture level.

Soil was measured with a range of ϵ_r from 10 to 18. This corresponded to the soil being dry (ϵ_r of 10 or VWC of 18.8%) to practically saturated (ϵ_r of 18 or VWC of 32%).

A protective "Shield Sandwich" for the tags made out of two pieces of 1mm 3D printed ABS and HIPS plastic. Theoretically, creating shields varying thickness could allow for changing a tag's sensing range to be centered around a chosen level of VWC.




Image of the RFID Sandwich shield.



Scan this QR Code to learn more about this project

Materials

- 2 Arduino UNOs
- Sparkfun SD logger Shield
- M6E Nano RFID Reader Shield
- Alien ALR-8698 High Gain Antenna
- Smartrac Dogbone RFID tag with "Shield Sandwich"
- Decagon 5TM soil moisture sensor

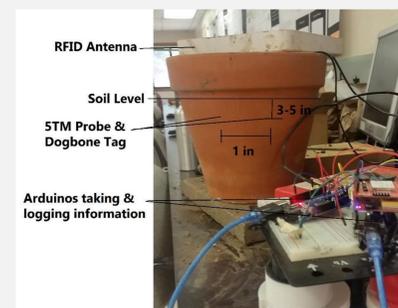


Graphic of the experimental setup


Experimental Results

It was realized that the Decagon 5TM moisture probe generated a significant amount of noise. This noise was effectively filtered by a moving median filter.

It is believed that electromagnetic interference between the RFID reader and 5TM probe was the source of this noise and, therefore, filtering it did not alter the relationship between the RFID and 5TM.

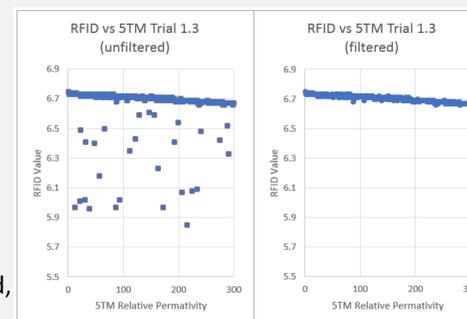

Visualizing the results of the electromagnetic noise filter

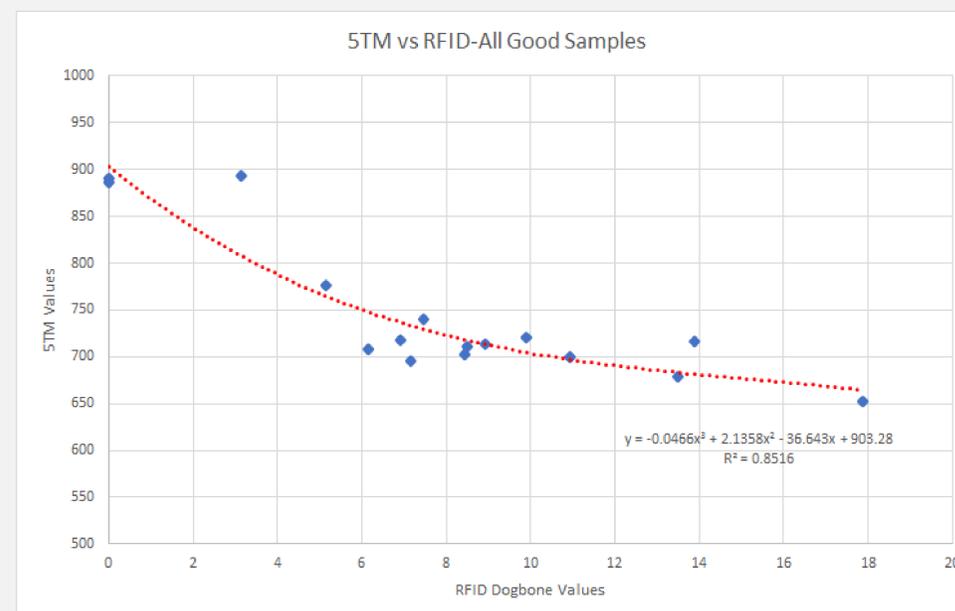

Results of experiment. Successful trials shown only. Possible model for relating RFID values to the 5TMs measurements of ϵ_r is shown in red

Of the 22 trials originally conducted, 5 were found to be outliers fitting and were removed before the final model was created. These outliers were randomly distributed and were determined to be caused by soil imperfections such as a small rock or air pocket near either of the sensors. A third-degree polynomial seems to be the best fit for the data model, however a first degree linear fit was used to find the final equation.

Conclusion

- Between the RFID sensor and 5TM, there was shown to be a statistically significant trend of an R^2 of 0.85 for a third degree polynomial.
- The experiments presented support the original hypothesis that the Dogbone RFID tags can be used as a soil moisture sensor.
- RFID tag sensor value to VWC was empirically determined to be with an error less than 10%²

$$f(x) = -8.82803 \times 10^{-8} x^3 - 2.47337 \times 10^{-5} x^3 - 3.88447 \times 10^{-3} x + 0.306477$$


Further Development



Collecting data from tags buried under a 10m radius center pivot irrigator. There were 18 total tags buried in this field.

We constructed a portable version of the RFID reader device field testing at Hermiston Agricultural Research Center. Using a companion phone app, we were able to record the change in soil moisture as a center pivot irrigation arm passed over the buried tags and overlay that data onto Google Maps.

The RFID system used in this way can be used to recognize over-watering to improve irrigation practices. It's estimated that farmers over-water their fields by 20%³. In the USA, this results in 5 billion gallons of water wasted every day.

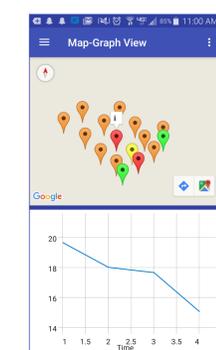

Screenshot from the app used during field trial

Acknowledgements and References:

This research was made possible with the help of the people at Oregon State University's OPeNS Lab. I would like to personally thank Dr. Chet Udell, director of the OPeNS Lab, whose resources, support, and guidance was vital to every stage of this research. Also to Jonah Siekmann, and Mitchell Moos who were both vital contributors to this project.

Funding for this project was generously granted through Oregon State University's URSA Engage program, Oregon State University Honors College's DeLoach Work Scholarship, and Portland State University's CleanTech Challenge. Also, to SmarTrac and RF Micron for their support on this project.

I would also like to thank my family for their unconditional love and for nurturing my curiosity from a young age.

1. SmarTrac N.V. (2017). SENSOR DOGBONE. Retrieved from https://www.smartrac-group.com/files/content/Products_Services/PDF/0027b_SMARTRAC_SENSOR_DOGBONE.pdf
2. G. C. Topp, J. L. Davis, A. P. Annan (1980). Electromagnetic determination of soil water content: Measurements in coaxial transmission lines. *Water Resource Research*, 16(3), 574-582. <http://onlinelibrary.wiley.com/doi/10.1029/WR016i003p0574/epdf>
3. Kelly, J. (2016). Addressing Data Resolution in Precision Agriculture (Doctoral dissertation). Retrieved from Oregon State University. (<https://ir.library.oregonstate.edu/downloads/bv73c3274>). Corvallis Oregon: Oregon State University.