

A survey on road safety and traffic efficiency vehicular applications based on C-V2X technologies

Ignacio Soto^{a,*}, Maria Calderon^a, Oscar Amador^b, Manuel Uruña^c

^a*Departamento de Ingeniería Telemática; Universidad Carlos III de Madrid; 28911 Leganés (Madrid); Spain*

^b*School of Information Technology; Halmstad University; Halmstad 30118; Sweden*

^c*Escuela Superior de Ingenieros y Tecnología, Universidad Internacional de la Rioja, 26006 Logroño, Spain*

Abstract

In recent years, the use of cellular network technologies to provide communication-based applications to vehicles has received considerable attention. 3GPP, the standardization body responsible for cellular networks specifications, is developing technologies to meet the requirements of vehicular communication applications, and the research community is testing and validating the ability of those technologies to implement different applications. This survey presents the body of work dealing with the use of cellular technologies to implement communication-based applications for the connected vehicle. We focus on basic and advanced road safety and traffic efficiency applications, which are critically important for the future of vehicular networks. We start by describing the different cellular-related technologies that have a role to play in providing services to the connected vehicle, propose a classification of types of communication used in

***Published as: Ignacio Soto, Maria Calderon, Oscar Amador, Manuel Uruña, A survey on road safety and traffic efficiency vehicular applications based on C-V2X technologies, Vehicular Communications, Volume 33, 2022, 100428, <https://doi.org/10.1016/j.vehcom.2021.100428>.**

******This work was partially supported by the Agencia Estatal de Investigación (AEI, Spain) through the ACHILLES project (PID2019-104207RB-I00/AEI/10.13039/501100011033) and by the Madrid Government (Comunidad de Madrid-Spain) under the Multiannual Agreement with UC3M in the line of Excellence of University Professors (EPUC3M21), and in the context of the V PRICIT (Regional Programme of Research and Technological Innovation).

*Corresponding author, current address: Departamento de Ingeniería de Sistemas Telemáticos, Universidad Politécnica de Madrid; 28040 Madrid (Madrid), Spain.

Email addresses: ignacio.soto@upm.es (Ignacio Soto), maria@it.uc3m.es (Maria Calderon), oscar.molina@hh.se (Oscar Amador), manuel.uruena@unir.net (Manuel Uruña)

vehicular applications, and then apply this classification to organize and present recent research work on the topic. Finally, we identify the main challenges in the use of cellular technologies to develop applications for the connected vehicle. *Keywords:* Safety and traffic efficiency applications, C-V2X, 5G, connected vehicle

1. Introduction

There are strong incentives to provide vehicles with communication-based applications to increase the safety of their occupants and other road users, as well as to improve the efficiency in the use of fuel and road infrastructures. Different standardization organizations have worked, and continue working, in developing solutions for the connected vehicle to implement the vision of a future Cooperative, Connected, and Automated Mobility (CCAM). Key results of these efforts are the Intelligent Transport System (ITS) protocol stack [1] with ITS-G5 [2] access specified by European Telecommunications Standards Institute (ETSI), and the Dedicated Short Range Communications (DSRC) protocol stack [3] developed by SAE International. These protocol stacks enable the communication among vehicles and between vehicles and nodes in the infrastructure (RSUs or Road-Side units).

Both the ETSI ITS with ITS-G5 and the DSRC protocol stacks are based, for their access layers, on IEEE 802.11p (IEEE 802.11 OCB — Outside the Context of a Basic service set), a mode of operation of the IEEE 802.11 standard [4] adapted to the needs of vehicular communications. For more than 10 years, numerous research efforts have been devoted to the use of this technology to provide services to the connected vehicle, with also a large number of pilot deployments on open roads [5] [6]. Spectrum in the 5.9 GHz band has been allocated to ITS services in different regions of the world. However, the commercial deployment of this technology has not progressed as expected.

Meanwhile, the 3rd Generation Partnership Project (3GPP) [7] started to develop solutions to enable the use of cellular technologies in the access layer of

25 connected vehicle communications, an effort jointly known under the name of
C-V2X (Cellular Vehicle-to-Everything), where "everything" (i.e., the X) can
be another vehicle, a pedestrian, the road infrastructure or a server on the
network. 3GPP Release 14 (from mid-2017) introduced, for the first time, D2D
(direct) communications between terminals specifically intended for vehicle-to-
30 vehicle communications. These efforts have resulted in a shift to focus on C-V2X
technologies to support vehicular communications, for example reflected in the
United States Federal Communications Commission (FCC) decision to change
the use of the reserved spectrum for intelligent transportation system operations
in the 5.9 GHz band from DSRC to C-V2X [8].

35 The 3GPP is in a constant process of improving the technology, considering
requirements for increasingly advanced services for the connected vehicle. The
research community has also focused on analyzing and improving the C-V2X
technologies to support the connected vehicle, and comparing them to IEEE
802.11p based approaches.

40 There are three main categories for connected vehicle applications:

1. Road safety: applications that assist in the protection of vehicles, their
occupants, and other road users. A special case is the protection of Vul-
nerable Road Users (VRUs), i.e., users not protected by a vehicle body,
such as pedestrians, cyclists and motorcyclists.
- 45 2. Traffic efficiency: applications that improve efficiency in the use of vehi-
cles. These applications can help save fuel, travel time, or make a better
use of roads to serve more users with the same infrastructure. In some
cases, there is an overlap between this category and the previous one:
for example, an application that facilitates vehicles merging onto a road
50 improves both safety and efficiency.
3. Others: applications such as, for example, convenience applications, and
access to information or entertainment (infotainment applications).

In this article we review the research on using C-V2X communications to
provide road safety and traffic efficiency applications to the connected vehi-

55 cle, although other applications are also contemplated when some work in the literature analyzes them co-existing with road safety and traffic efficiency applications.

1.1. Related work

60 In recent years, a number of surveys have been published in different areas related to the support of connected vehicle applications, using different access technologies including C-V2X communication technologies. Araniti et al. [9] in an early paper investigated the usability of Long Term Evolution (LTE) to support vehicular applications to face the drawbacks of IEEE 802.11p technology. 65 Masini et al. [10] reviewed various access technologies for Vehicle-to-Vehicle (V2V) communications to enable vehicular sensor networks, including economic motivations and business models. The work of Singh et al. [11] had a much wider scope, reviewing in a tutorial style different communication technologies; protocol stacks specified in USA, Japan and Europe; applications; standardiza- 70 tion efforts; and description of related research projects. Ahangar et al. [12] investigated the autonomous vehicle use case and the service provided by different vehicular communications technologies with different coverage ranges (from Zigbee to 5G-New Radio) paying attention to latency requirements. Chen et al. [13] studied C-V2X as enabling technologies to meet the requirements of 75 autonomous driving, presenting the technical evolution path from LTE Vehicle-to-Everything (LTE-V2X) to New Radio-V2X (NR-V2X) and highlighting field trials and developments in China. The paper of Gyawali et al. [14] studied the challenges for LTE and New Radio (NR) to support Vehicle-to-Everything (V2X) communications in general, without discussing any particular applica- 80 tion, especially concentrating physical layer structure, synchronization and security. The work of Bazzi et al. [15] provided a survey about different aspects of the sidelink interface design taking into account the evolutionary path of sidelink interface in 3GPP. Interestingly, the paper includes a discussion on congestion control mechanisms for sidelink interface. Alalewi et al. [16] focused on the

85 5G enabling technologies and their potential applicability to relevant V2X use cases such as platooning or remote driving, specially concentrating on the QoS requirements of the analysed use cases. It includes an historical review of vehicular communications, considering projects, technologies and standards. The topics covered by Singh et al. The work of Jeong et al. [17] surveys IP-based vehicular networking, and the analyzed issues are related with the particularities
90 of using IP transport on vehicular networks: IP-based applications, IP address autoconfiguration, IP mobility management, and IP security. Finally, Lee et al. [18] provided an interesting survey about the connected vehicle applications and their benefits, but in a communication technologies-agnostic way.

95 Other related surveys focused on the use of IEEE 802.11p technology to provide vehicular communications, as the survey of Toor et al. [19] where the main issues addressed were Internet connectivity, data dissemination, and routing over IEEE 802.11p, or the work of Jeong et al, [20] which surveyed systems, protocols, applications, and security for safe and efficient driving, but most surveyed cases use IEEE 802.11p as access technology, and it does not analyze how
100 the access technology performs to implement these use cases. There are other surveys that covered different aspects related to vehicular networking, such as the comparison of Wi-Fi and sidelink cellular technologies for communicating vehicles [21], Internet of Vehicles based on C-V2X technologies [22] [23], radio resource allocation in C-V2X technologies [24], [25] [26], security [27], or
105 machine learning applied to vehicular communications [28].

Table 1 shows a comparison of this survey and other recent related surveys. The comparison is based on the following aspects: C-V2X technologies covered; whether they include a description (tutorial style) of C-V2X and related technologies; whether they include an analysis by type of end-point (vehicle, pedestrian, infrastructure, or network) and characteristics of messages exchanged;
110 whether it classifies the surveyed papers by experimentation methodologies; whether it includes an analysis of communication services to support different

Reference	C-V2X	Tutorial of C-V2X and related technologies	Analysis by type of end-point and characteristics of the messages exchanged	Analysis of C-V2X communication services to support applications	Classification by experimentation methodology	V2X Use Cases	Standardization	Other
Araniti et al., 2013 [9]	LTE Uu; LTE PC5; MBMS	X	X	✓	X	X	✓	X
Masini et al., 2018 [10]	LTE PC5; NR PC5	✓	X	X	X	Vehicular sensor networks	✓	X
Singh et al., 2019 [11]	LTE Uu; LTE PC5	✓	X	X	X	X	✓	X
Chen et al., 2020 [13]	LTE Uu; LTE PC5; NR Uu; NR PC5	✓	X	X	X	Autonomous vehicle	✓	MEC
Bazzi et al., 2021 [15]	LTE PC5; NR PC5	✓	X	X	✓	Vehicle platooning; remote driving; collective perception; advance driving	✓	X
Gyawali et al., 2021 [14]	LTE Uu; LTE PC5; NR; MBMS	✓	X	X	X	X	✓	SDN; Network slicing; MEC
Ahangar et al., 2021 [12]	LTE Uu; LTE PC5; NR	X	X	X	X	Autonomous vehicle	✓	X
Alalewi et al., 2021 [16]	NR Uu; NR PC5	X	X	✓	X	Vehicle platooning; remote driving; collective perception; advance driving	✓	SDN; NFV; Network slicing; MEC
Our survey	LTE Uu; LTE PC5; NR Uu; NR PC5; eMBMS	✓	✓	✓	✓	28	✓	SDN; NFV; Network slicing; MEC

Table 1: Comparison of this survey with other recent related surveys.

types of applications; use cases; standardization; and other related technologies.

1.2. Current Survey

The contribution of our survey focuses on the literature that analyzes the utilization of the different C-V2X technologies to support connected vehicle applications, studying their appropriateness to meet their requirements, their
120 limitations, and exploring how to use and configure the technologies for this purpose. To this end, this paper introduces several novel aspects that, as a whole, have not been covered by other surveys in the past:

1. We feature a brief tutorial on C-V2X communication technologies, including the latest ones such as 5G NR (New Radio) cellular and NR sidelink.
- 125 2. We categorize the types of communication and related messages needed to enable different applications for the connected vehicle (cooperative collision warning, see-through or collective perception are some examples of the 28 specific applications considered in the survey). Upon this categorization, we extend the 3GPP classification of types of V2X communications
130 that only considers the type of end-point (e.g., vehicle, pedestrian, infrastructure) to take also into account the characteristics of the exchanged messages (e.g., periodic, event-driven, relayed by RSU, or multi-hop).
3. We explore the recent literature on proposals of C-V2X related solutions to provide the communications services (types of communication and associated messages) required by connected vehicle applications.
135
4. We categorize surveyed papers by the experimentation methodology they use (e.g., focused simulations, system-level simulations, real equipment tests, field tests and demonstrations).
5. We present several challenges for C-V2X applications research and deployment.
140

The rest of the article is organized as follows: section 2 briefly reviews the C-V2X communication technologies; section 3 categorizes the different types of communication to support connected vehicle applications; section 4 organizes and summarizes, with the previous classification scheme, the contributions of
145 the literature studying C-V2X based applications; section 5 identifies the main future challenges for the research and development of C-V2X applications; and

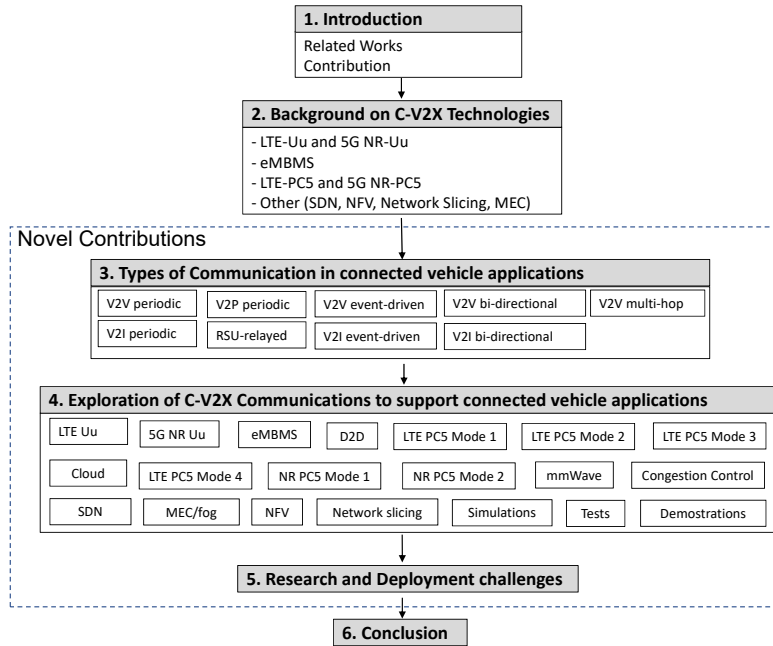


Figure 1: Structure of this survey

finally, section 6 summarizes the conclusions of our survey. The organization of the survey is shown in Figure 1. The objective is to make it easier for readers to understand the topics covered and its general structure.

150 2. Background: C-V2X communication technologies

The 3GPP [7] develops specifications for cellular network technologies. The specifications are organized in *Releases*. The most recent, as of this writing, is *Release 17*, scheduled for 2022 (although some work has already been started on Release 18). Since *Release 14* (issued in 2017), the 3GPP has been developing
 155 communication technologies tailored for the connected vehicle, under the name Vehicle-to-Everything (V2X) technologies or Cellular-V2X (C-V2X), but even before that milestone, researchers had been exploring the use of cellular communication technologies to support applications for the connected vehicle as an

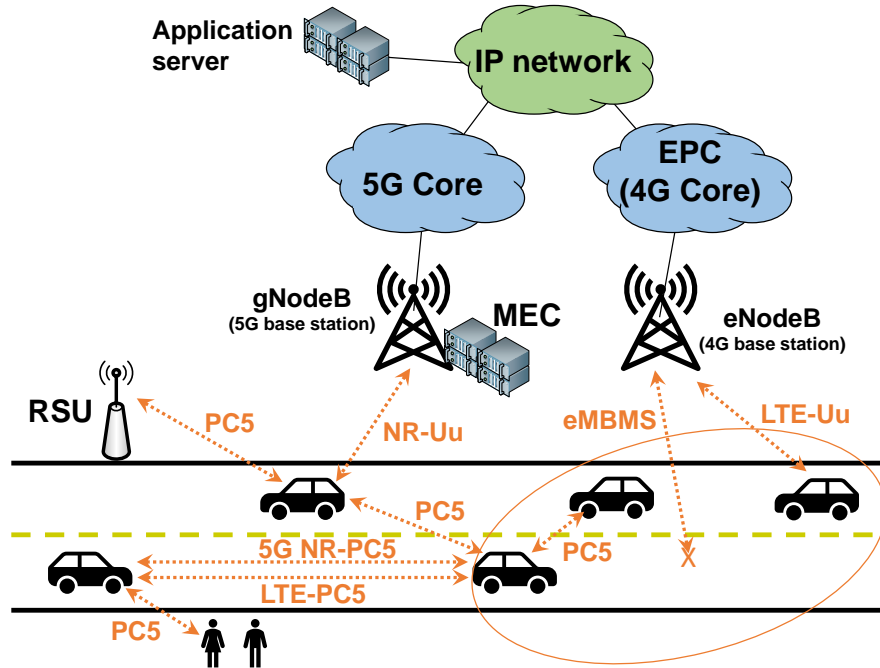


Figure 2: C-V2X communication interfaces

alternative to the previous solutions based on IEEE 802.11p communications.

160 In this section we briefly present the different cellular communication technologies, and related ones that can be used to support applications for the connected vehicle. Some of the communication interfaces and technologies are represented in Figure 2.

2.1. LTE Uu and 5G NR Uu

165 Uu is the traditional radio interface of the cellular communication network, which allows terminals to access the network through a base station in the infrastructure. LTE Uu is the 4G version of this interface, while 5G NR (New Radio) Uu is the 5G version of this interface (included initially in Release 14, and in continuous development in later Releases). 5G NR Uu allows the use of
 170 new frequency bands (including mmWave), and it enables higher throughput, less latency, higher reliability, and improved spectrum efficiency.

2.2. eMBMS

eMBMS (evolved Multimedia Broadcast Multicast Service) provides point-to-multipoint communications through the Uu interface of 3GPP cellular networks [29] [30]. The initial method for resource allocation in eMBMS is called MBSFN (Multicast Broadcast Single Frequency Network), and was designed for video channel broadcasting. MBSFN is based on a strict scheduling of services, synchronized transmissions to a group of cells, and dedicated physical channels for broadcast traffic. An alternative method for resource allocation of broadcast traffic was introduced in Release 13, namely SC-PTM (Single-Cell Point-To-Multipoint) which enables delivering services to one cell and does not require dedicated channels for broadcast traffic, achieving more flexibility and less latency. SC-PTM has been, therefore, the method chosen for V2X communications [31]. Further improvements for broadcast communications for V2X applications are expected in Release 17.

2.3. LTE PC5 and 5G NR PC5

Sidelink communications (direct communication between terminals) were introduced in 3GPP specifications in Release 12 (2015) but focusing on supporting proximity services [32] [33], for example, for communications of public safety operatives. PC5 is the name in 3GPP networks for the sidelink interface. Release 12 LTE PC5 interface has two modes of operation [34]: mode 1 in which the resources are assigned from the network; and therefore, network coverage is required for operation, and mode 2 in which resources are autonomously allocated by each terminal; and therefore, network coverage is not needed for operation.

3GPP Release 14 (2017) was the first to introduce sidelink communications explicitly designed for V2X communications [35] [36] [37] [38] [39]. In particular, two modes of operation were introduced:

1. Release 14 LTE PC5 mode 3: supports direct broadcast communications between vehicles, but the resource allocation for the communication is from the network, which requires vehicles to be in the radio coverage of a cellular base station.

2. Release 14 LTE PC5 mode 4: supports direct broadcast communications between vehicles, but the resource allocation for the communication is done autonomously by each vehicle. Therefore, vehicles do not need to be
205 in the radio coverage of a cellular base station. The autonomous allocation of resources is done with an algorithm called S-SPS ("Sensing-based SemiPersistent Scheduling").

A high level description of how the S-SPS algorithm works is as follows (for a more detailed description, see [39] or [40]):

- 210 1. The objective for a vehicle is to assign to itself radio resources to be able to broadcast a message on the sidelink interface. Radio resources are, basically, a slot in time and a chunk of bandwidth that can allow sending the message.
2. The vehicle chooses a selection window, where there are resources that
215 could allow to transmit the message while fulfilling its timing requirements.
3. The vehicle uses a sensing window, previous to the selection window, during which the vehicle checks the utilization of the medium (a vehicle senses the media while not transmitting). There are two ways to detect a resource as busy: the received power or when a future resource is announced as reserved in the control information sent with a message (see below).
220
4. Based on the feedback obtained in the sensing window, the vehicle can identify free candidate resources in the selection window, which could be used by the vehicle to send its message. From among them, one is randomly selected from a subset of the best candidates.
- 225 5. The resource selection is kept for a number of repetitions. The time between repetitions and when resources are re-selected is configurable. A re-selection can also be triggered if needed to fulfill latency requirements.

Note that the algorithm relies on a semi-persistent scheduling of resources, which allows to discover the future utilization of resources from the information
230 captured on the sensing phase. Vehicles announce, as part of the control block

sent with a message, if they intend to use a future slot and the time period until that slot (from a fixed set of resource reservation intervals). This works well with messages sent at fix periodic intervals and with fixed sizes [41]. Some limitations of this scheduling mechanism are the half-duplex problem (a vehicle transmitting using some frequency resources at one time slot cannot hear vehicles transmitting at the same time slot even in a different frequency), and bursts of collisions (if two vehicles choose the same resources and period, they will not be able to detect their collisions). The semi-persistent allocation makes these limitations worse, since two vehicles that are transmitting repeatedly at the same time become invisible to each other. The work in [42] developed analytical models to study the performance of Release 14 LTE PC5 mode 4.

A new version of D2D PC5 modes for C-V2X communications was developed in Release 16 (2020) [43] [44] [45] [46] [47]. These new modes are based on 5G NR, and they are not meant to replace the LTE PC5 interface modes but to complement them — LTE PC5 offers basic services in the ITS reserved band at 5.9 GHz, while NR PC5 provides advanced services with higher requirements and, potentially, using alternative spectrum at licensed and unlicensed bands. The two NR PC5 modes are:

1. Release 16 NR PC5 mode 1: supports direct unicast, groupcast or broadcast communications between vehicles, but the resource allocation for the communication is done by the network, which requires vehicles to be under the radio coverage of a cellular base station.
2. Release 16 NR PC5 mode 2: supports direct unicast, groupcast, or broadcast communications between vehicles, but the resource allocation is done autonomously by each vehicle. Therefore, the vehicles do not need to be under the radio coverage of a cellular base station.

The NR PC5 mode 2 defines two ways for the autonomous allocation of resources. In one, resources are allocated for an individual message and their retransmissions (when HARQ, — Hybrid Automatic Repeat Request — is used to improve reliability), which is appropriate to send event-driven messages, a

use case that was not well addressed with the S-SPS algorithm. The second one is another semi-persistent allocation algorithm, a modified version of the S-SPS algorithm, which is appropriate to reserve resources for sending periodic messages.

265 In more detail, the improvements in the NR PC5 mode 2 mechanism for resource allocation are as follows: (1) the ability to deal more efficiently with event-driven messages by means of an improved HARQ mechanism that adds, for unicast and groupcast communications, no-blind HARQ to the blind HARQ¹ used in LTE PC5 mode 4; (2) more flexibility on the possible resource reser-
270 vation intervals that a vehicle can choose for its periodic messages (although still from a limited set of options); (3) smaller minimum latency (1 ms); (4) a mechanism to exclude candidate resources that can collide with reservations made when the vehicle cannot hear them (half-duplex issue); (5) a re-evaluation mechanism that allows a vehicle to check that its reserved resources have not
275 been reserved by other vehicles after its initial selection; and (6) a preemption mechanism so that a vehicle has to withdraw its reserved resources if, after a re-evaluation, finds that a vehicle with higher priority traffic is going to use them. These improvements provide more flexibility and adaptability to allocate resources meeting the different requirements of the traffic generated in vehicles,
280 and reducing collisions due to conflicts among different allocations.

2.4. Additional technologies

The efficient and flexible support of ultra-reliable low-latency communications for V2X services provided through the cellular network infrastructure requires the combination of various technologies, of which we highlight the follow-
285 ing:

- **Software Defined Networking (SDN)** [48][49] consists in separating

¹Without going into details, blind HARQ consists on retransmitting a packet preventively to improve reliability; while no-blind HARQ uses feedback from receivers, in unicast and groupcast communications, to decide if retransmissions are needed.

the control plane and the data plane in the network. The control function is centralized in nodes called network controllers, which offer programming interfaces that allow SDN applications to program the network. Using SDN, the network becomes much more flexible and adaptable to dynamic requirements.

• **Network Function Virtualization (NFV)** [50] [49] moves network functions from dedicated hardware appliances to virtualized functions running in general purpose hardware. This provides greater flexibility in when, where, and how to deploy functions (networking services) that are needed in the network.

• **Network Slicing** [51] [52] allows to offer different network services using the same physical infrastructure, so it is possible to provide a customized network service to meet application needs. Through network slicing, the network can guarantee low latency requirements to some applications while serving high bandwidth demands from other applications, all without wasting network resources.

• **Multi-access Edge Computing (MEC)** [53] [54] deploys IT infrastructure with virtualization capabilities at the edge of the network. This infrastructure allows to deploy network functions and applications at the edge of the network. For example, a virtual core network and applications can be deployed in a base station, so the application can offer a low latency service to terminals in the corresponding area (i.e., the cell), because the traffic does not have to go through the physical core of the network and then through Internet to reach the application server. MEC specifications include a set of APIs (application programming interfaces) to manage the applications as well as to allow applications to access information in the network that can be useful (such as the quality of the radio communication with a terminal or the terminals present in a cell).

All these technologies are related and must be strongly integrated in the

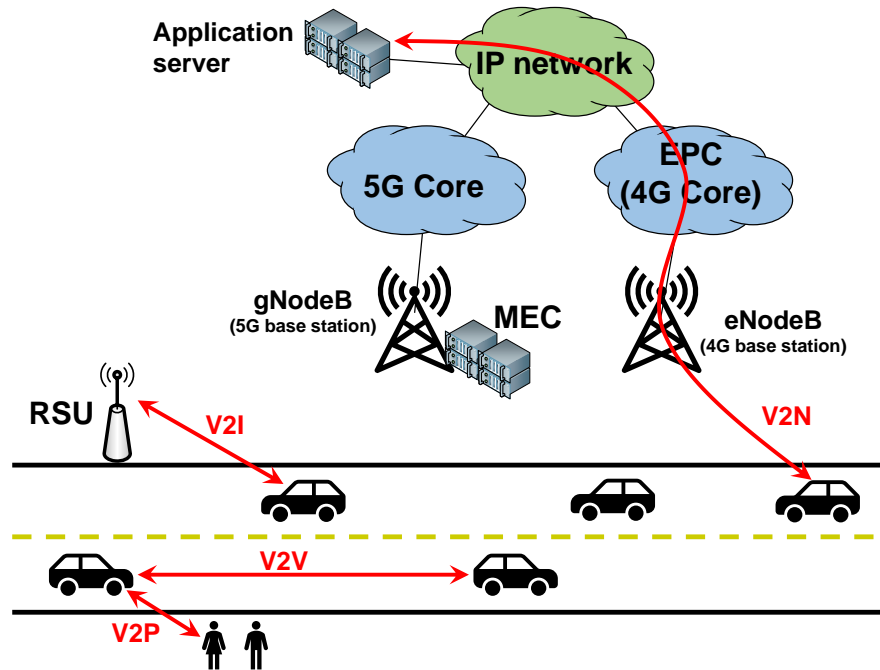


Figure 3: Types of communication in C-V2X

network to meet the requirements of vehicular communication applications.

3. Types of communication used in applications for the connected vehicle

An application for connected vehicles has several components: transfer of
 320 information, acquisition of information from sensors and through communica-
 tions, processing of information, and human-machine interface aspects. In this
 paper we focus on the information transfer component. 3GPP identifies the fol-
 lowing types of communication involved in V2X applications [55] (represented
 in Figure 3):

- 325 1. **V2V** — **Vehicle-to-Vehicle** communications in which vehicles send
 messages to other vehicles.

2. **V2P — Vehicle-to-Pedestrian:** communications in which vehicles send messages to pedestrians, or pedestrians send messages to vehicles. In this case, the communication solutions could be similar to the V2V case, but there can be particularities associated with considerations about pedestrians' devices (e.g., battery availability).
3. **V2I — Vehicle-to-Infrastructure:** communications in which vehicles send messages to the infrastructure, in particular to RSUs (Road Side Units), or RSUs send messages to vehicles. An RSU is a node (e.g., a traffic light or a road signal) located close to a road that can exchange V2X messages with other entities such as vehicles or pedestrians. A local server can be associated with the RSU for message processing.
4. **V2N — Vehicle-to-Network:** communications in which vehicle exchanges messages with a V2X application server in the network.

The difference between V2I and V2N communications is that V2I involves communications with vehicles in the geographical area of the related RSU, while this is not the case with V2N communications in which servers can provide service to different geographical areas. V2I are one-hop communications between RSUs and vehicles, while V2N communications require an IP transport to communicate with a server potentially at multiple hops through the network infrastructure (e.g., involving the use of the core part of the cellular network to communicate with external networks). Even so, the two cases can be difficult to differentiate in some situations, for example when using solutions that move application processing closer to the edge of the network (i.e., MEC).

In this paper, and based on different reviews of applications for the connected vehicle [56] [57] [58] [11] [18] [59], we extend the 3GPP classification of types of V2X communication, not only considering the type of end-point (e.g., vehicle, pedestrian, infrastructure) but also the characteristics of the messages being exchanged. The considered types of communication are the following:

1. **V2V periodic messages:** messages that are periodically sent by a vehicle to all surrounding vehicles, to provide and update information about

itself. The period used to send messages is not necessarily fixed, since in many situations the period could be dynamically adjusted to traffic or network conditions. The most significant example is awareness messages, used to inform about the location and kinematic data of the vehicle. Ex-

360
 365
 370
 375
 380
 385

2. **V2V event-driven messages:** messages that are sent by a vehicle to surrounding vehicles to notify an event. A message associated with an event is usually repeated several times over a period of time, but the duration of this time is limited and is related to the duration of the event that triggered the message. An example is a vehicle that detects ice on a road segment and informs surrounding vehicles of the situation. ETSI Decentralized Environmental Notification Messages (DENMs) are an example of event-driven messages. Some V2V applications, such as platooning, use a combination of periodic and event-driven messages.
3. **V2V bi-directional communications:** point-to-point bi-directional communications between two vehicles. An example is a vehicle that wishes to overtake the vehicle in front but has limited visibility, so it requests streaming video of the road ahead from the vehicle in front (see-through application).
4. **V2V multi-hop messages:** sometimes it is convenient to extend the coverage of V2V or V2I Intelligent Transport System (ITS) messages beyond the radio coverage of the entity sending the message. This can be achieved by other vehicles forwarding the messages, or even, if there are not nearby vehicles, by a vehicle carrying the message and forwarding it later on. For example, a message alerting about an icy road segment could be sent to a geographical area farther from the vehicle detecting it, to give

drivers in other vehicles more time to react.

- 390 5. **V2P periodic messages:** messages that are periodically sent by a vehicle to all surrounding pedestrians, to provide and update information about itself; or messages that are periodically sent to all surrounding vehicles by a pedestrian's device to provide and update information about the pedestrian. In most cases the messages are the same as in V2V periodic messages, only the participants in the communication change.
- 395 6. **V2I periodic messages:** messages that are sent periodically by an RSU to all vehicles in its coverage area. For example, an RSU can send information about the geometry of an intersection, about traffic signals, or about traffic lights cycles.
- 400 7. **V2I event-driven messages:** messages that are sent by an RSU to all vehicles in its coverage area, or to particular vehicles in it, to inform about an event; or messages sent by a vehicle to the infrastructure. A message associated with an event is usually sent several times over a period of time, but the duration of this time is limited and related to the duration of the event that triggered the message. An example is an RSU that uses sensors
405 to detect people in a pedestrian crossing and warns approaching vehicles. Another example is an emergency vehicle approaching an intersection that sends a message to an RSU in the intersection (e.g., a traffic light) to request the right-of-way.
- 410 8. **RSU-relayed messages:** when V2V messages received by RSUs are forwarded to other interest areas to extend their coverage, or are forwarded to a server in the network for further processing. For example, an RSU in an intersection can receive and forward V2V awareness messages to improve coverage in the presence of obstacles; or the RSU could send the messages to a traffic control server, which could use them for traffic
415 monitoring or to execute actions such as controlling traffic lights cycles. This type of communication assumes that messages are not sent directly to the server (which would be a V2N communication), but broadcast in 1 hop by vehicles and received by an RSU.

9. **V2N bi-directional communications:** point-to-point full duplex com-
420 munications between a vehicle and a server in the network. This type of
communication requires the use of IP transport to reach the server in the
network. An example is a vehicle sending information about the current
traffic situation or other conditions in the road, and downloading updated
dynamic maps.

425 Not all possibilities are present in this classification. For example, some of
the message exchange types in the V2V case are not present in other cases.
The reason is that we could not find in the literature examples of applications
using them. This could be because the particular communication type has not
been explored yet in vehicular applications or because the type is not really
430 applicable.

In Table 2 we present the different types of communication considered in this
paper, giving examples of applications, classified by application category (e.g.,
road safety, traffic efficiency, or convenience). Moreover, the table also includes
the papers that are later reviewed and that explore each type of communication
435 (sometimes a paper appears more than once, if it explores more than one type
of communication).

From Table 2, it can be concluded that most research on C-V2X has been
focused on V2V periodic messaging, which is considered the most basic ITS
service and present in "Day 1" use cases [62] and pilots [63], together with V2I
440 communications, which are the second area with more research. Moreover, it
is worth noting that most of these works are focused on single-hop communi-
cations, with few papers considering multi-hop communications or RSU-relayed
messages.

4. **An exploration of the use of C-V2X communications to support 445 connected vehicle applications**

In this section we explore the contributions of recent literature regarding
the use of C-V2X communications to support connected vehicle applications.

V2X Communication Types	Category	Example Applications	Related papers
V2V periodic messages	Road Safety	Cooperative collision warning	[64] [65] [66] [67] [68] [69]
		Intersection movement assistance	[70] [71] [72] [73] [74] [75]
		Slow vehicle warning	[76] [77] [78] [79] [31] [80]
Traffic Efficiency	Cooperative glare reduction	[81] [82] [83] [84] [85] [86]	
	Collective perception	[87] [88] [89] [90] [91] [92]	
Convenience	Cooperative Adaptive Cruise Control	[93] [94] [95] [96] [97] [98]	
	Platooning	[99] [100] [101] [102] [103]	
Stolen vehicle alert		[104] [105] [106]	
V2V event-driven messages	Road Safety	Stationary vehicle warning	[64] [69] [87] [72] [77] [98]
		Emergency electronic brake lights	[99] [79] [31] [81] [93] [103]
		Queue/Traffic jam ahead warning	[104] [107]
Traffic Efficiency	Road condition warning		
	Platooning (braking/join/leave)		
V2V bi-directional communication	Road Safety	See-through	[108] [109] [110] [103]
	Convenience	Instant messaging	
V2V multi-hop	Safety/Efficiency	Coverage extension of ITS messages	[111] [112] [113] [114]
V2P periodic messages	Road Safety	Pedestrian collision warning to vehicles Vehicle collision warning to pedestrians	[115] [116]
V2I periodic messages	Road Safety	In-vehicle signage	[117] [111] [118] [93] [103]
	Traffic Efficiency	Curve speed warning Green Light Optimized Speed Advisory	[119]
V2I event-driven messages	Road Safety	Infrastructure based collision warning	[120] [121] [122] [110] [123]
		Warning of vulnerable road user presence	[124] [125] [126] [127] [128]
		Infrastructure based traffic jam ahead warning	[103] [129] [107] [130] [119]
Traffic Efficiency	Infrastructure based road condition warning		
	Roadwork warning		
Emergency vehicle signal preemption			
RSU-relayed messages	Safety/Efficiency	RSUs receive ITS messages and broadcast them to extend their reach	[84] [85] [113] [118] [123]
		RSUs receive ITS messages and send them to a server (e.g., traffic control center)	[131] [122] [114] [127] [103]
V2N bi-directional communication	Safety/Efficiency	Dynamic map download and update	
		Remote driving	[117] [112] [111] [132] [131]
		Media downloading	[133] [134] [103]
Convenience	Point of interest notification		
	Payment services		
	Stolen vehicle alert (warn service provider)		
	Secure software updates for vehicles		

Table 2: Different types of V2X communication to support vehicular applications

450 Table 3 situates the contributions of the different reviewed papers. The first row in the table represents the different types of communication used in connected vehicles applications that we have identified in section 3. The first column includes the different C-V2X related technologies reviewed in section 2, and also (separated by a double line) different alternatives to evaluate the performance or test the behavior of the technologies (simulations, field tests, and so on).

Thus, the table allows to identify the types of V2X communication explored
455 in each reviewed paper, the C-V2X technologies analyzed, and the validation
methods employed.

The list of C-V2X related technologies includes **D2D**, by which we mean
papers that assume generic direct-to-direct communication technology without
following a particular 3GPP solution, or papers in which it is not clear which
460 D2D solution is used. *IEEE 802.11p* is also on the list even though it is not a
C-V2X technology as it is often used in performance comparisons with C-V2X
technologies, or in hybrid systems combining *IEEE 802.11p* with C-V2X tech-
nologies.

With respect to the validation part, we have the following categories:

- 465 1. **Focused simulations:** this refers to numerical analysis or simulations
that do not model the whole system under study (for example, they model
radio issues but not the MAC protocol, or they focus on the performance
of particular algorithms within the system). We also report here papers
that do not provide enough details about what exactly was simulated or
470 how.
2. **System-level simulations:** simulations that model the whole system
under study and are used to experimentally analyze the system.
3. **Real equipment tests:** real-life equipment in a lab environment is used
to experimentally analyze the system under study.
- 475 4. **Field tests:** tests with real equipment are performed in open roads, or
in test tracks that emulate real conditions.
5. **Demonstrations:** complete applications are shown in open roads for
demonstration purposes. The aim is not to have an environment in which
to carry out test and obtain performance numbers, but show the technol-
480 ogy in real life to stakeholders.

Table 3 shows that the interest on communication types is technology-
agnostic, since most works are focused on V2V periodic messages and V2I event-
driven ones. Regarding technologies, the more popular ones are LTE Uu (due

	V2V periodic messages	V2V event-driven messages	V2V bi-directional communication	V2V multi-hop	V2P periodic messages	V2I periodic messages	V2I event-driven messages	RSU-relayed messages	V2N bi-directional communication
IEEE 802.11p	[73] [65] [70] [80] [96] [117] [101] [92] [94]			[114]		[117]	[117] [125] [127] [119]	[127]	[117]
LTE Uu	[66] [67] [69] [72] [117] [71] [76] [31] [81] [89]	[31] [81]			[116] [115]	[111] [117] [119]	[120] [117] [124] [125] [121] [126] [128] [119]	[84] [85] [113]	[112] [111] [117] [103]
5G NR Uu	[104]	[104]	[110]			[119]	[116] [123] [119]		[133]
eMBS	[76] [66] [67] [69] [72] [71] [31] [81]	[31] [81]							
D2D	[95] [73] [80]			[111] [112]				[114]	
Rel. 12 LTE PC5 mode 1	[76] [66] [67] [84] [85] [64] [69] [72] [63] [77] [74]	[64] [69] [72] [77]							
Rel. 12 LTE PC5 mode 2	[68]								
Rel. 14 LTE PC5 mode 3	[73] [86] [87] [70] [71] [88] [81] [82]	[87] [81]	[135] [136]	[113]		[119]	[119] [130]		
Rel. 14 LTE PC5 mode 4	[73] [78] [96] [97] [83] [90] [91] [100] [101] [102] [92] [93] [94] [103] [105]	[93] [103] [107]	[103]			[119] [93] [103]	[128] [107] [119]		
Rel. 16 NR PC5 mode 1	[106]					[119]	[119]		
Rel. 16 NR PC5 mode 2	[98] [99]	[98] [99]				[119]	[119]		
mmWave			[108]				[122]	[122]	[132]
Congestion control	[80] [97] [101] [102] [92] [93]	[93]				[93]			
Cloud							[127] [121]	[127] [134]	[103]
MEC/fog	[31] [81] [104]	[31] [81] [104]			[116] [115]		[120] [122] [121] [124] [126] [127] [128] [129] [107]	[122] [127] [134]	[133] [103]
SDN	[104]	[104]							[132]
Network virtualization	[104]	[104]					[127] [124]	[127]	[103]
Network slicing	[104]	[104]				[111]	[120]		[111] [133] [103]
Focused simulations	[64] [65] [70] [69] [72] [68] [71] [73] [74] [77] [87] [86] [92] [89] [90] [98] [99] [102]	[64] [69] [72] [87] [77] [98] [99]	[108] [135] [136]	[112]	[115]		[122] [128] [125] [129]	[122]	[112] [133]
System-level simulations	[73] [76] [66] [67] [84] [85] [78] [31] [88] [80] [81] [96] [97] [82] [83] [91] [101] [105] [106]	[31] [81] [107]		[111] [113] [114]	[116]	[111]	[128] [107] [130]	[84] [85] [113] [114]	[111]
Real equipment tests	[94]						[126] [124]		
Field tests	[73] [117] [100] [93] [94] [103] [104]	[93] [103] [104]	[110] [103]			[117] [119] [93] [103]	[120] [117] [121] [127] [119]	[127]	[132] [117] [103]
Demonstrations	[95] [103]	[103]	[103]			[119] [103]	[119]		[103]

Table 3: Literature on the use of C-V2X communications to support connected vehicle applications

to its wide availability), and the sidelink communications modes. Although in
485 LTE Rel. (Release) 12 almost all works were focused on the network-coordinated

mode 1, on LTE Rel. 14 (and in lesser extent NR Rel. 16, due to the few papers considering it) the research interest seems to be moving to the distributed-coordination modes. Besides the obvious technological evolution (with older technologies accumulating more works), the validation part of Table 3 shows
490 that a great majority of papers are still simulation-based, with a small number of works using real-world equipment, which in many cases are just using an LTE Uu interface (specially on V2I applications), albeit the availability of Rel. 14 LTE equipment is enabling several works with a real-world evaluation.

In the rest of the section, we provide more detailed explanations about the
495 contributions of the reviewed papers to the analysis of using C-V2X to support applications for the connected vehicle. The structure follows the classification of different types of V2X communication introduced in section 3.

4.1. V2V periodic messages

This is the most common communication type to support applications for
500 the connected vehicle. As such, the use of C-V2X technologies to provide this communication type has been the most studied in the literature.

Many of the early efforts in the application of cellular communication technologies to support connected vehicle applications consisted in the study of using the Proximity Services (ProSe) D2D interface, defined in Rel. 12, in vehicular scenarios (Rel. 12 LTE PC5 mode 1 [64] and mode 2 [68]). Since this
505 D2D interface was not designed with vehicular communication requirements in mind, the focus was on identifying its limitations for supporting V2V periodic messages, and proposing alternative resource allocation strategies with the aim of maximizing the use of the medium while meeting the latency and reliability
510 constraints of V2V communications for safety applications.

Most early works used simulations in the evaluation part but, probably due to the lack of available tools, these simulations did not model the whole system, but only parts of it (such as algorithms for resource scheduling), or included significant simplifications of parts of the system. Even so, the importance of
515 tests in the real world was already considered from the beginning: the work

in [73] used software defined radios and two real vehicles to get a first look at the direct communication between vehicles using cellular-like radios, while [117] compared the use of IEEE 802.11p for direct V2V communications with the use of communications through the network in the infrastructure using LTE Uu (in
520 the latter case, the latency was shown to be too large for safety applications).

Several initial works compared the performance of IEEE 802.11p and Rel. 12 LTE PC5 mode 1 (resources assigned from the infrastructure) for sending V2V periodic messages, showing potential benefits of the LTE PC5 approach by applying strategies of frequency reuse [65] [70] [80].

525 There was also interest in comparing the performance of sending the periodic messages from a source vehicle to the infrastructure (LTE Uu) to be later broadcast from there to target vehicles with the use of D2D approaches (Rel. 12 LTE PC5 mode 1 [66] [67] [76] and Rel. 14 LTE PC5 mode 3 [71]), which concluded that latency was lower with the D2D approaches. The work in [31] (extended
530 in [81]) used servers deployed at base stations to improve the latency of the communications of the V2V periodic messages sent through the infrastructure (a MEC-like approach), and concluded that the performance from the point of view of latency could be enough to support safety services, but performance degrades with network load.

535 Several papers [66] [67] [76] [81] [84] [85] explored the combination of D2D and LTE Uu, by using information obtained from the messages sent by vehicles and received in the infrastructure to improve the scheduling of resources in the network for D2D communications. For example, [81] [84] [85] proposed to reuse frequencies for D2D communications according to vehicles' locations obtained
540 from the periodic messages they send to the infrastructure.

Another work that explored the use of the LTE Uu interface for sending V2V periodic messages was [89]. The studied scenario involved mobile base stations deployed in Unmanned Aerial Vehicles (UAV) to improve the connectivity service offered to vehicles compared with using only terrestrial base stations.
545 The analyzed application was collective perception (extended sensors), which involves broadcasting messages with sensor data (through the infrastructure in

this case) to increase the sensing range beyond that of the sensors of individual vehicles. The main conclusion of this work is identifying the potential of UAVs to improve connectivity in vehicles.

550 Rel. 14 of 3GPP standards included the first D2D solution specifically developed for communications among vehicles. Different works in the literature have studied its performance when sending V2V periodic messages and proposed improvements to better fulfill the communication requirements of the connected vehicle. Rel. 14 LTE PC5 mode 4 was studied in [78] [83] [91] [90] [97] [102].

555 The work in [78] proposed a feedback mechanism to deal with one of the limitations of the distributed scheduling algorithm of the standard, namely the possibility of repeated collisions among vehicles choosing the same resource. In [83], authors explored different values for the configuration parameters of Rel. 14 LTE PC5 mode 4 interfaces to achieve good performance when sending V2V
560 periodic messages. The performance was measured in terms of packet delivery ratio and inter-packet gaps, and results showed a big impact on performance stemming from different configuration options, and the poor performance it exhibits in high network traffic load situations. In [91], the performance of the S-SPS algorithm specified in the standard for resource allocation was evaluated; 565 identifying weaknesses such as persistent half-duplex errors, hidden terminal errors, and persistent packet collision errors, which result in poor performance in situations of high network traffic load; and also an alternative algorithm for resource allocation was proposed and evaluated. The work in [90] developed an analytical model to study the performance of a collective perception sharing ap-
570 plication based on Rel. 14 LTE PC5 mode 4. Collective perception was studied with simulations in [137] but, although Rel. 14 LTE PC5 mode 4 is considered as potential technology for the implementation of the solution, the simulations were done with IEEE 802.11p. In [97], the authors studied the applicability of Rel. 14 LTE PC5 mode 4 to a particular application: a crash warning sys-
575 tem in scenarios with network congestion, and concluded that improvements are needed to this technology in order to support this application in high density scenarios. In [102], a novel congestion control mechanism for Rel. 14 LTE PC5

mode 4 was proposed, which is able to support two different communication service classes (better coverage or better rate).

580 The comparison of C-V2X with IEEE 802.11p for sending V2V periodic messages has been revisited, now comparing vehicular networks based on IEEE 802.11p (DSRC or ITS-G5) with its most straightforward alternative, the Rel. 14 LTE PC5 mode 4 (direct communications without support from the infrastructure): In [96] and [92], IEEE 802.11p and Rel. 14 LTE PC5 mode 4 were compared
585 considering realistic generation of CAMs [60], according to the dynamics of vehicles and with changes in the sizes of the messages, and they found that the performance (packet reception ratio and inter-packet gap) of IEEE 802.11p is better in scenarios with medium and high vehicle traffic (also when using congestion control [92]) because the S-SPS algorithm, defined in LTE PC5 mode
590 4, is found to have limitations when transmitting messages at shifting periods and with variable sizes. IEEE 802.11p also achieves less latency, due to the long time a vehicle has to wait in LTE PC5 mode 4 for the persistent scheduled resource. As in previous works, the persistent collision and half-duplex problems were identified as sources of performance loss in Rel. 14 LTE PC5 mode 4. In
595 [101], BSMS (with fixed size and frequency) were sent instead of CAMs, and SAE J2945/1 was used as congestion control algorithm in both technologies, achieving similar performance at low distances (until up to 300m) if HARQ was used in Rel. 14 LTE PC5 mode 4 (which means double bandwidth is needed), while the performance of Rel. 14 LTE PC5 mode 4 was better at longer distances. The consecutive packet loss issue of Rel. 14 LTE PC5 mode 4, due to
600 the channel access mechanisms, was also confirmed in this study. These works [96] [92] [101] used different system-level simulator tools in the validation part.

In [94], the comparison between IEEE 802.11p and Rel. 14 LTE PC5 mode 4 for sending V2V periodic messages was performed using real equipment by
605 means of lab tests and experiments on a test track. Results showed that radio coverage and robustness against interference is better for Rel. 14 LTE PC5 mode 4, which achieves longer communication ranges and better performance in the presence of obstacles. The experiments also tested the SAE J2945/1 con-

gestion control algorithm, originally developed for vehicular networks based on
610 IEEE 802.11p, with the Rel. 14 LTE PC5 mode 4 network, and showed that
it works well avoiding large degradation of performance with increased network
load. Experiments in test tracks and open roads using real Rel. 14 LTE PC5
mode 4 equipment for sending V2V periodic messages were also reported in
[93], [100], and [103]. These works explored the performance of using differ-
615 ent configuration options (number of antennas, use of HARQ, transmit power,
modulation and coding scheme, bandwidth, congestion control), and in differ-
ent situations (line-of-sight/non-line of sight, moving/static vehicles, up to eight
vehicles in a test track and in open roads). Interestingly, [100] used a realistic
antenna placement in the vehicle (encasing and location in the car similar to
620 which could be done in a real vehicle) and this has a significant impact on perfor-
mance (packet error rate as high as 16.65% at distances lower than 100m while,
for example [103] achieved good performance (minimum losses) at even 1.2 km
ranges. In [103], several applications were implemented and demonstrated, so
not only the communication part was analyzed, but also elements such as user
625 interfaces and information processing. Examples of tested applications based
on periodic CAMs were blind spot warning/lane change warning, intersection
moving assist, left turn assist, and follow-me information. No issues were found
with the operation of any of these applications.

We end the section with two tables summarizing some key points. Table 4
630 classifies the main contributions of the surveyed articles on the use of V2V peri-
odic messages, and Table 5 lists specific example applications analyzed in those
articles (note that many articles study the exchange of messages for awareness,
for example, but without particularizing to specific applications such as collision
warning or cooperative adaptive cruise control).

635 4.2. V2V event-driven messages

An early work [64] considered sending messages within a deadline using the
Rel. 12 LTE PC5 mode 1 technology, and proposing an algorithm for resource
allocation.

Contributions	Related papers
Network-based resource allocation in PC5 interface	[64] [65] [70] [80]
Distributed resource allocation in PC5 interface	[68] [78] [81] [91] [96] [92] [101]
Parameter configuration of Rel. 14 LTE PC5 mode 4	[83] [101] [93] [100] [103]
Comparison of IEEE 802.11p with C-V2X	[117] [65] [70] [80] [66] [67] [76] [71] [96] [92] [101] [94]
V2V communications through the Uu interface	[117] [66] [67] [76] [71] [31] [81] [89]
Combining Uu and D2D for providing V2V services	[66] [67] [76] [81] [84] [85]
Edge processing strategies	[31] [81]
Performance impact of network load	[31] [81] [90] [97]
Congestion control	[102] [92] [101] [94]
Demonstration/analysis of specific applications	[90] [89] [97] [103]
Performance evaluation tested with real-life equipment	[73] [94] [93] [100] [103]

Table 4: Classification of contributions of surveyed papers, V2V periodic messages

Specific applications	Related papers
Collective perception	[89] [90]
Collision warning	[97]
Blind spot warning/lane change warning	[103]
Intersection moving assist	[103]
Left turn assist	[103]
Follow-me information	[103]

Table 5: Examples of specific applications analyzed on surveyed papers, V2V periodic messages

Besides V2V periodic messages, the work in [31] (extended in [81]) also
640 tested sending event-driven V2V messages from a vehicle to the infrastructure,
to be later broadcast from there or transmitted in unicast to some particular

vehicles. The event-driven messages alerted vehicles of dangerous situations (e.g., collision avoidance). This work showed that using servers deployed in the base stations (a MEC-like approach) allows to achieve a performance that was considered good enough for safety services, but the performance degrades with network load, even for the event-driven messages that had more priority than the periodic messages (CAMs) being sent. In [81], this approach was compared with sending the messages directly between vehicles using the Rel. 14 LTE PC5 mode 3 technology, and the performance was better in the latter case (although just single-cell scenarios were considered).

In [107], the LTE PC5 mode 4 technology was used to implement a cooperative lane merging application based on sending V2V event-driven messages combined with periodic awareness messages. The success ratio achieved by the application was larger than 90% if the delay in the operation of the application was very low (less than 5ms), but degrades with larger delays (delays that can be originated in the communications part or in the application information processing).

The main focus in the design of Rel. 14 LTE PC5 interfaces was on supporting V2V periodic messages. So, the limitations of Rel. 14 LTE PC5 mode 4 interfaces to send V2V event-driven messages were identified in [98] [99]. In particular, limitations were found in the autonomous sidelink resource allocation algorithm (S-SPS). For example, the sensing window of 1s used in Rel. 14 LTE PC5 mode 4 works well with periodic messages but it is too long for asynchronous traffic. The work in [98] [99] explored several strategies and configuration parameters, following the work in progress at the time in Rel. 16 NR PC5 mode 2 [45], for the resource allocation algorithm for event-driven messages. The main allocation options explored were: random resource selection, sensing-based resource selection (S-SPS as in Rel. 14 LTE PC5 mode 4), and short-term sensing (S-SPS as in Rel. 14 LTE PC5 mode 4, but with a 100ms sensing window instead of 1s). These allocation options were studied while the event-driven traffic co-exists with periodic messages with resources allocated using the S-SPS of Rel. 14 LTE PC5 mode 4. The conclusion was that sens-

Contributions	Related papers
Network-based resource allocation in PC5 interface	[64] [81]
Distributed resource allocation in PC5 interface	[107] [98] [99]
Parameter configuration of PC5 interface	[98] [99] [93] [103]
V2V communications through the Uu interface	[31] [81]
Edge processing strategies	[31] [81]
Performance impact of network load	[31] [81]
Demonstration/analysis of specific applications	[103] [107]
Performance evaluation tested with real-life equipment	[93] [103]

Table 6: Classification of contributions of surveyed papers, V2V event-driven messages

ing is important for performance, but that short-term sensing (100ms) is better for event-driven messages. The experimental part of the work was done using
675 system-level simulations.

Experiments with V2V event-driven messages using real Rel. 14 LTE PC5 mode 4 equipment in test tracks and open roads were reported in [93] and [103]. These works explored the performance of different configuration options (number of antennas, use of HARQ, transmit power, modulation and coding scheme,
680 bandwidth, congestion control), and in different situations (line-of-sight/non-line of sight, moving/static vehicles, up to eight vehicles in a test track and in open roads). As mentioned in previous section, [103] also reported the implementation and demonstration of several applications. Some of them were based on sending event-driven messages, including emergency electronic brake
685 light and slow stationary vehicle warning. These demonstrations involved two vehicles and a motorcycle operating under different conditions and speeds, and no issues were found with the operation of the applications.

We end the section with two tables summarizing some key points. Table 6 classifies the main contributions of the surveyed articles that study the use
690 of V2V event-driven messages, and Table 7 lists specific example applications analyzed in those articles.

Specific applications	Related papers
Cooperative lane merging	[107]
Emergency electronic brake light	[103]
Slow stationary vehicle warning	[103]

Table 7: Examples of specific applications analyzed on surveyed papers, V2V event-driven messages

4.3. V2V periodic messages and V2V event-driven messages: Platooning

An application that has received particular attention is platooning, i.e., the support of several vehicles moving together at short inter-vehicle distances and following a platoon leader. Platooning improves the efficiency of road use and fuel efficiency in vehicles. Platooning is implemented with V2V periodic messages, used by vehicles to exchange the information they need to operate safely within the platoon; and V2V event-driven messages, used by vehicles to join and leave the platoon or to warn of an emergency braking situation. Because of its interest, and the combination of V2V periodic and event-driven messages, we dedicate this section to analyze the research on using C-V2X technologies to support platooning applications.

Different works have explored the communications needed to support a platoon and how to implement them with C-V2X technologies. A common model is to have V2V periodic messages between the platoon leader and its members, and from each member to the follower vehicle. Initial works explored the use of Rel. 12 LTE PC5 mode 1 technology [74] [69] [72] [77] [87] to support these communications, studying algorithms for resource allocation to maximize the reuse of radio resources and to minimize latency. In some cases, the communication between the platoon leader and its members is implemented by sending the information to the infrastructure from the platoon leader, and multicast from there to the platoon members using eMBMS [69] [72]. The communications needed for platoon formation and, in some cases, braking events, were also considered in [69] [72] [77] [87]. These works used simulations in the evaluation part, but they did not model the whole system, only parts of it (such as algo-

rithms for resource scheduling), or included significant simplifications in parts of the system.

Later works already considered the use of D2D technologies specifically designed for vehicular communications to support the platooning application: 720 Rel. 14 LTE PC5 mode 3 [82] [75] [86] [88]; Rel. 14 LTE PC5 mode 4 [75] [105]; and Rel. 16 5G NR mode 1 [106]. In the works using Rel. 14 LTE PC5 mode 3 and Rel. 16 5G NR mode 1, the focus was on exploring different algorithms for resource allocation. The works in [88] and [106] considered scenarios with several cells, which is an important issue when resources are allocated from 725 the network. In both works, a group scheduling approach to resource assignment was proposed in which resources are assigned to the platoon as a whole through the platoon leader, and not individually to each vehicle. This mechanism improves performance during handovers but requires coordination among base stations. Even with group scheduling, at high network load scenarios the works concluded that further improvements are needed to meet platoon application requirements. In [75], a comparison between IEEE 802.11p, Rel. 14 LTE PC5 mode 3, and Rel. 14 LTE PC5 mode 4 was done, and the conclusion was that PC5 modes can achieve reduced inter-truck spacing due to more reliable communications, and that Rel. 14 LTE PC5 mode 3 outperforms Rel. 14 LTE 730 PC5 mode 4, but note that mode 3 was studied considering only scenarios with just one cell. The work in [105] explored the limitations of the S-SPS algorithm for resource scheduling in LTE PC5 mode 4, in particular the half-duplex problem and the collision bursts, and the conclusion was that, although the global performance (average packet delivery ratio) seems adequate, the concentration 735 of losses have a significant impact on the performance of the platooning application. The evaluation of all these later works was based on system-level simulations using different simulation tools.

In [93], the performance of communications in a platoon, using real Rel. 14 LTE PC5 mode 4 equipment and in the presence of network congestion, was 745 tested in a test track. The main conclusion was the importance of using a congestion control mechanism since performance, measured as packet error rate

Contributions	Related papers
Communication models to support platooning	[74] [69] [72] [77] [87]
Network-based resource allocation in PC5 interface	[74] [69] [72] [77] [87] [82] [75] [86] [88] [106]
Distributed resource allocation in PC5 interface	[75] [105]
Comparison of IEEE 802.11p with C-V2X	[75]
V2V communications through the Uu interface	[69] [72] [104]
Edge processing strategies	[104]
Performance impact of network load	[88] [106] [93]
Demonstration/analysis of specific applications	[74] [69] [72] [77] [87] [82] [75] [86] [88] [106] [105] [93] [104]
Performance evaluation tested with real-life equipment	[93] [104]

Table 8: Classification of contributions of surveyed papers, platooning

or information age, degrades sharply without it. However, no specific measures of the inter-vehicle distance supported in the tested scenarios were given.

The work in [104] proposed a framework that combines NFV, SDN, MEC,
750 and network slicing to deploy ultra reliable and low latency vehicular services. The framework was deployed in a test track using 5G NR Uu technology to test a platooning application. The achieved latency for periodic CAMs and event-driven messages, thanks to using a specific slice for low latency and deploying a 5G core as a virtual function in the edge, was below 10ms, which fulfils the
755 requirement set by 3GPP for platooning applications. Table 8 classifies the main contributions of the surveyed articles that study the use of V2V periodic messages and V2V event-driven messages in platooning applications.

4.4. V2V bi-directional communication

There are not many works exploring V2V bi-directional communications be-
760 cause D2D technologies developed by 3GPP, at least previously to Rel. 16 NR

PC5, are not designed for point-to-point bi-directional communications in vehicular networks. Even so, there are relevant scenarios that require this type of communication, in particular, see-through applications: a vehicle requesting and obtaining LIDAR or video information from another vehicle, so it can "see" zones that are hidden from its direct vision. Potentially, the assignment of additional dedicated spectrum to ITS communications beyond the current reserved ITS band at 5.9GHz; the use of alternative spectrum (licensed or unlicensed, including mmWave frequency bands), as it is already contemplated for the NR PC5 interface; or the communications through the 5G NR Uu interface and the infrastructure, with ultra-low latency and high bandwidth, could bring many more opportunities for these use cases.

An early work about the use of mmWave to share LIDAR data between vehicles was [108]. This paper proposed a distributed algorithm for communication link allocation between vehicles, and concluded that it is important to consider not only link information (distance for example) but also the value of the information exchanged (receiving information from two nearby vehicles may cause resources to be expended in obtaining redundant information). However, the simulation part was focused on the scheduling algorithm and not in accurately modeling the communications part itself.

In [110], the application of sharing LIDAR data between two vehicles was implemented in a test track with real equipment, in particular with pre-5G NR Uu interfaces, so LIDAR data was sent by one vehicle to a server in the infrastructure (traffic management center), and it was sent from there to the other vehicle. The test scenario was very demanding, since the application was the automatic driving of the second vehicle. The test results were not satisfactory, packet loss and computations can lead to large delays that make cooperative sensing only safe at very low speeds. Antenna alignments and the presence of obstacles were found to have a strong impact on performance, so the paper concluded that further optimizations are needed.

In [103], the experiments with Rel. 14 LTE PC5 mode 4 real equipment included a see-through application to stream video from one vehicle to another.

Contributions	Related papers
Distributed direct communication link allocation	[108]
Network-based resource allocation in PC5 interface	[135] [136]
V2V communications through the Uu interface	[110]
Demonstration/analysis of specific applications	[108] [110] [103]
Performance evaluation tested with real-life equipment	[110] [103]

Table 9: Classification of contributions of surveyed papers, V2V bi-directional communications

Specific applications	Related papers
See-through (LIDAR data)	[108] [110]
See-through (video)	[103]

Table 10: Examples of specific applications analyzed on surveyed papers, V2V bi-directional communications

The performance was enough to send low-quality video (although not competing with other traffic).

See-through applications have significant bandwidth requirements. One interesting approach to meet them is to use Rel. 14 LTE PC5 mode 3 or Rel. 16 PC5 mode 1, so that direct communications between pairs of vehicles can share spectrum with communications between cellular users (vehicles or not) and the network. The network allocates resources (spectrum and power) to the different communication links, allowing spectrum re-use and optimization of different parameters (e.g., sum capacity or link delay). Although we have not found papers analyzing this configuration from the point of view of applications, the works in [135] and [136], for example, proposed algorithms for resource allocation in Rel. 14 LTE PC5 mode 3.

We end the section with two tables summarizing some key points. Table 9 classifies the main contributions of the surveyed articles that study the use of V2V bi-directional communications, and Table 10 lists specific example applications analyzed in those articles.

4.5. V2V multi-hop messages

Multi-hop communications through the vehicular network using specific C-V2X technologies has received little attention until now, which can be due to a focus on the main case: one-hop communications. Works in [111] [112] [131] [114] proposed mechanisms to extend the coverage of safety messages, and in particular included solutions for forwarding safety messages through other vehicles, in combination with other techniques such as clustering, and relaying from the infrastructure. While the communication with the infrastructure was done with cellular networks, none of these works used specific V2V C-V2X communication technologies for the multi-hop communication part (instead, IEEE 802.11p [114] and generic D2D communications technologies [111] [112] were used, and in [131] perfect communications were assumed and the focus was on evaluating an algorithm for an optimal lane selection application).

The work in [113] is based on having the vehicles divided in clusters, in which vehicles can communicate directly at one hop, and two mechanisms were proposed to send event-driven safety messages to an area of interest: using vehicles at the border of two clusters to forward messages between clusters, and using relaying through the infrastructure. A key contribution, compared with the works above, is that the V2V communication technology used was Rel. 14 LTE PC5 mode 3, and a strategy for resource allocation was also proposed.

We end the section with two tables summarizing some key points. Table 11 classifies the main contributions of the surveyed articles that study the use of V2V multi-hop messages, and Table 12 lists a specific example application analyzed in those articles.

4.6. V2P periodic messages

The protection of VRUs, and pedestrians in particular, is one of the most relevant use cases for safety applications for the connected vehicle. Many of the results of the works about V2V periodic messages are also relevant for V2P periodic messages, as they test the ability of the technology to enable the reception of periodic messages under timing constraints. Specific works considering

Contributions	Related papers
Clustering techniques	[112] [111] [131] [114] [113]
Combining Uu and D2D for providing services	[112] [111] [114]
Network-based resource allocation in PC5 interface	[113]
Demonstration/analysis of specific applications	[131]

Table 11: Classification of contributions of surveyed papers, V2V multi-hop messages

Specific applications	Related papers
Optimal lane selection	[131]

Table 12: Example of a specific application analyzed on surveyed papers, V2V multi-hop messages

V2P periodic messages with C-V2X technologies are [115] [116], which explored the use of the LTE Uu interface to implement applications to protect pedestrians, in combination with MEC technology to reduce latency. In [115], periodic messages are sent from pedestrians’ devices to vehicles through the infrastructure, so vehicles can warn drivers of risks with pedestrians when appropriate. In [116], periodic messages are sent from vehicles and from pedestrians’ devices, and each side runs collision detection algorithms although, due to the limitations on pedestrians’ devices, the paper explored the option of off-loading some of the processing to the MEC infrastructure to improve energy consumption and timing. None of the papers discuss the scalability problems posed by the fact that many pedestrians and vehicles could send periodic messages to the infrastructure that have to be broadcast back to them all. Table 13 classifies the main contributions of the surveyed articles that study the use of V2P periodic messages for pedestrian protection applications.

4.7. V2I periodic messages

The straightforward implementation of this type of communication is with an RSU supporting a PC5 interface. However, some works have tried alternative implementation using the Uu interface and a V2N communication model in

Contributions	Related papers
V2P communications through the Uu interface	[115] [116]
Edge processing strategies	[115] [116]

Table 13: Classification of contributions of surveyed papers, V2P periodic messages

which the communication is IP-based from a server in the network to particular vehicles (and not to all vehicles in the coverage area of a base station/RSU). One of the challenges with the V2N implementation of these scenarios is the addressing of destination vehicles: a server can only reply after messages sent
860 by vehicles allow to obtain their addressing information. An example of this approach is the work in [117], where tests were done with real equipment. In the tests, messages, which could include variable traffic sign information for example, were sent periodically from a base station to vehicles through a LTE Uu interface. The latency was measured and resulted too large for safety applica-
865 tions.

Experiments, in test tracks or on open roads, with real RSUs with Rel. 14 LTE PC5 mode 4 interfaces were reported in [93], [103] and [119]. In [93], tests involving up to eight cars and two RSUs were carried out, exploring different configuration options. With an appropriate configuration (HARQ on, 2RX antennas,
870 20 dBm transmission power, 20 MHz bandwidth), an effective coverage radio of 1400m in line-of-sight conditions was achieved; and at least 400m in non-line-of-sight conditions. The work in [103] deployed an RSU in a bridge in a real road and studied the achieved radio coverage, which depended on physical conditions (obstructions) but was at least 550m with packet reception ratios
875 over 90% (in line with the results in [93]). Also, as previously mentioned, the work in [103] reported the implementation and demonstration of several applications using real Rel. 14 LTE PC5 mode 4 equipment. One example application based on V2I periodic messages was in-vehicle information (traffic sign information sent to vehicles to be presented to drivers), which was tested in different
880 conditions: urban and motorway scenarios, and changing locations of vehicles

Contributions	Related papers
Parameter configuration of PC5 interface	[93]
V2I communications through the Uu interface	[117]
Demonstration/analysis of specific applications	[117] [103] [119]
Performance evaluation tested with real-life equipment	[117] [93] [103] [119]
Communications to support automatic driving	[118] [119]

Table 14: Classification of contributions of surveyed papers, V2I periodic messages

Specific applications	Related papers
In-vehicle signage	[117] [103]
Green Light Optimized Speed Advisory	[119]

Table 15: Examples of specific applications analyzed on surveyed papers, V2I periodic messages

and RSUs. No issues were found in the behavior of the application. In [119], the focus was on applications based on V2I periodic messages for supporting automated driving, with implementations of several PC5-based C-V2X applications. The applications were: traffic light control system integration (an RSU
885 broadcasts messages with traffic light information); and automated driving system integration (an RSU sends information from traffic light controllers and this information is fed to the autonomous driving module of the vehicle). The measured latency of the communication between the RSU and a vehicle was 30ms (in tests with just two vehicles and one RSU present). The importance of
890 V2I communications to support autonomous driving vehicles was also analyzed in [118].

We end the section with two tables summarizing some key points. Table 14 classifies the main contributions of the surveyed articles that study the use of V2I periodic messages, and Table 15 lists specific example applications analyzed
895 in those articles.

4.8. V2I event-driven messages

Similar to the previous case, the straightforward implementation of applications based on V2I event-driven messages is using an RSU supporting a D2D interface to broadcast information to vehicles (even to particular ones if needed).
900 Even so, many works used the Uu interface in combination with MEC infrastructure to process and send information from a base station to vehicles with low latency. This is actually a V2N implementation of the V2I communication, but since the focus of the information sent to vehicles is local to the infrastructure station sending it, we analyze those applications here. As mentioned before,
905 one of the challenges with the V2N implementation of these scenarios is the addressing of the destination vehicles: a server can only address vehicles after messages sent by them allow the server to obtain the destinations' addressing information and, in fact, some proposals assume that the vehicles must send periodic messages to the server.

910 A key application for V2I event-driven messages is Vulnerable Road Users (VRUs) warning systems. One approach, explored in [121], [127] and [128], is based on vehicles and VRUs' devices sending CAMs or BSMS to the infrastructure. The infrastructure processes the information in the CAMs/BSMS and detects risks of collisions. When a risk of collision is detected, the infrastructure
915 sends warning messages to vehicles and VRUs. In these works the focus was on latency, and the results highlight the importance of processing the CAM information to predict collisions close to the edge of the network: perhaps using MEC in the RSU, if D2D technologies are used [127]; or using MEC in base stations if Uu interfaces are used [121] [128]. The evaluation in [121] and [127] was
920 done with real equipment in a lab environment, and system level simulations were carried out in [128].

A similar application for V2I event-driven messages is infrastructure-based collision warning, which is intended to prevent collisions between vehicles (for example, in intersections). The work in [124] designed an application with a
925 similar approach to [121] above: CAMs sent by vehicles are processed by the infrastructure to detect risks of collisions, and warnings are sent back to vehi-

cles through the LTE Uu interface when needed. The results highlight again the importance of processing the CAM information to predict collisions close to the edge of the network using MEC in base stations. The work in [126] followed a similar approach: an LTE Uu interface was used to send collision warning messages from the infrastructure, but considering other network traffic as well, and ensuring low latency by using MEC and reserving some capacity in the access link for the warning messages. The evaluation in [124] and [126] was done with real equipment in a lab environment. With the same communication scheme, the work in [120] investigated the importance of MEC to achieve low latency and allow heavy processing to support applications such as infrastructure-based collision warning, or infrastructure-based see-through (which can benefit from processing the video with other aggregated information in the MEC infrastructure). In a pilot test in a German motorway, a latency lower than 20 ms was achieved thanks to MEC technology [120].

In [123], vehicles send their location and movement information to a server through a 5G NR Uu interface, and the server, using machine learning, recommends merging maneuvers.

In [129] the detection of risks of collisions was done using cameras and a computer vision algorithm. The algorithm processing was done close to the RSU that sends the warning messages, in unicast or geocast, to vehicles through Rel. 14 LTE PC5 mode 4. The focus was on exploring the parameters (transmission power, and number of repetitions of the warning messages) to achieve a given reliability requirement, but not in studying the latency of the complete system. A vulnerable road user collision warning application based on Rel. 14 PC5 mode 4 technology was reported in [119]. The application uses cameras to detect pedestrians, and an RSU broadcasts information to surrounding vehicles that determine locally if there is a risk of collision. The application in [119] was implemented with real equipment with Rel. 14 LTE PC5 mode 4 interfaces (in vehicles and RSUs) and no issues were found.

In [107], Rel. 14 LTE PC5 mode 4 technology was used to implement a cooperative lane merging application based on sending V2I event-driven messages

(merging requests) combined with periodic awareness messages. An RSU sends these messages to a MEC server for processing, and the result are messages
960 accepting or denying the merging request that are sent by the RSU to vehicles. The evaluation was done with system-level simulations. The success ratio achieved by the application was larger than 90% if the delay in the operation of the application is very low (less than 5ms), but degrades with larger delays (delays that can be originated in the communications part or in the application
965 information processing). The number of deployed RSUs improves reliability, but it has less impact on delay provided that there is at least one RSU per 2 km. Note that this approach was compared to using only V2V communications (see section 4.2) and the V2V approach was found to be better assuming enough processing capacity in vehicles. A simulation platform was proposed
970 in [130], which combined vehicular simulators and a custom-made simulator of LTE PC5 technology (although, apparently, the resource reservation part was not modeled). The authors used the platform to experiment with two V2I applications for automatically driven vehicles: driving through intersections and remote driving. To support these applications, vehicles send messages to RSUs
975 (trajectories, local sensor information) and RSUs send back driving decisions to vehicles. The RSUs communicate among themselves to be able to provide a global service to vehicles.

A different type of application was analyzed in [122] and [125], in which vehicles send messages to the infrastructure about vehicles that can be a risk
980 to other vehicles (over-speeding vehicles, for example). The messages can be originated in an automatic system in the own vehicle that is causing the risk (for example, an over-speeding detection system), or in a nearby vehicle that detects a rogue behavior of another vehicle. After receiving the messages, the infrastructure can implement different measures, such as modifying the traffic
985 lights in an intersection, or sending warning messages to alert other vehicles. Both D2D [122] [125] and cellular (Uu based) technologies [125] were used for exchanging messages between vehicles and the infrastructure.

As mentioned before, the work in [103] implemented and demonstrated sev-

Contributions	Related papers
Parameter configuration of PC5 interface	[129] [119]
V2I communications through the Uu interface	[121] [128] [124] [126] [120] [123] [125] [110]
Combining Uu and D2D for providing V2I services	[125]
Edge processing strategies	[127] [121] [128] [124] [120] [107]
Demonstration/analysis of specific applications	[121], [127] [128] [124] [126] [120] [123] [129] [119] [107] [130] [122] [125] [103] [110]
Performance evaluation tested with real-life equipment	[121] [127] [124] [126] [120] [119] [103] [110]
Communications to support automatic driving	[130]

Table 16: Classification of contributions of surveyed papers, V2I event-driven messages

eral applications in open roads and test tracks, and used real Rel. 14 LTE PC5
990 mode 4 equipment (in RSUs and vehicles). One of the applications implemented
for demonstration was based on V2I event-driven messages: a roadworks warn-
ing application. No issues were found with the application in the demonstration.
In [110], a road condition warning application was deployed on a test track, but
using a pre-5G NR Uu interface to send the warning messages through the
995 infrastructure.

We end the section with two tables summarizing some key points. Table 16
classifies the main contributions of the surveyed articles that study the use
of V2I event-driven messages, and Table 17 lists specific example applications
analyzed in those articles.

1000 4.9. RSU-relayed messages

The solution explored in [84] [85] [113] organized vehicles in clusters, with
periodic and event-driven V2V messages sent to the infrastructure in order to

Specific applications	Related papers
Vulnerable road user collision warning	[121], [127] [128] [119]
Infrastructure-based collision warning	[120] [124] [126] [129]
Infrastructure-based see-through	[120]
Cooperative lane merging	[123] [107]
Driving through intersections support	[130]
Warning of rogue vehicles	[122] [125]
Roadworks warning	[103]
Road condition warning	[110]

Table 17: Examples of specific applications analyzed on surveyed papers, V2I event-driven messages

be relayed to other clusters through their respective cluster heads. The Uu interface was used for these communications, which means that this implementation really used V2N communications. These works are a proof-of-concept techniques to increase the coverage of ITS messages, but the approach is less efficient than using an RSU that supports a D2D interface and can directly receive V2V messages exchanged by vehicles. For example, in [114] [118] [127], the information obtained from V2V periodic messages received by RSUs was relayed to servers for processing (for gathering information [114] [118] or detecting risks of collisions [127]). In [122], event-driven messages with traffic violation reports (e.g., over-speeding notifications) transmitted by vehicles were sent to a traffic control center by RSUs, which also broadcast them to increase coverage, perhaps after some processing such as aggregating the information of several messages. In [134], shockwave detection algorithms were studied, and the solution was based on having a network that allows the infrastructure to receive messages sent by vehicles with their location and movement information, which are then relayed to servers for running the algorithms with the information of the messages as input. In principle, implementations in which the information is directly sent by the vehicles to the servers and implementations in which RSUs relay the messages to the servers are both possible. When processing of the received information is required, the solutions use MEC to keep the processing

Contributions	Related papers
Clustering techniques	[84] [85] [113]
Relaying through the Uu interface	[84] [85] [113]
Edge processing strategies	[127] [122] [134]
Demonstration/analysis of specific applications	[114] [118] [127] [122] [134]

Table 18: Classification of contributions of surveyed papers, RSU-relayed messages

Specific applications	Related papers
Relaying information to Traffic Control Center	[114] [118] [122]
Collision avoidance	[127] [122]
Shockwave detection	[134]

Table 19: Examples of specific applications analyzed on surveyed papers, RSU-relayed messages

close to the edge of the network and achieve shorter latency [127] [122] [134], while relying on computations in the cloud for operations that require a global
1025 view of the network [127] [134].

We end the section with two tables summarizing some key points. Table 18 classifies the main contributions of the surveyed articles that study the use of RSU-relayed messages, and Table 19 lists specific example applications analyzed in those articles.

1030 4.10. V2N bi-directional communications

In [117], using real equipment on a test track, media downloading (maps, for instance) through a LTE Uu interface was compared with using IEEE 802.11p, and the achieved throughput was clearly better in the former case. It is interesting that, in [117], the performance of the LTE Uu interface was tested with
1035 different vehicles' speeds and a significant degradation was observed for speeds over 90 km/h.

The works in [111] (simulations) and [103] (field tests) explored the ability of network slicing techniques to offer different service quality to different applica-

tions. In particular, in [103], LTE Uu based V2N communications from devices
1040 located in a vehicle moving through a motorway, with coverage provided by a
test cellular network, were evaluated. The results of using network slicing tech-
niques showed that the network is able to offer different services (bandwidth
and latency) to different users. Additionally, the results showed that when one
slice does not use its assigned bandwidth, it can be used by other slices, proving
1045 that network slicing is able to guarantee resources to one application, without
hindering the efficient use of resources.

Several works [112] [133] proposed a model in which cellular technology is
used to send information to a traffic server in the network (e.g., a traffic control
centre) and retrieve back traffic incident notifications, or path planning data.
1050 In [133], vehicles, through 5G NR Uu interfaces, send cooperative perception
messages and download local dynamics maps to support automatic driving,
with processing done in a MEC infrastructure to achieve the required latency.
The evaluation was based on simulations. In [132], the target application was
dynamic map downloading, but the radio technology was mmWave, and SDN
1055 was used to configure the mmWave links and the network. The evaluation was
done in a testbed with one vehicle and two RSUs.

We end the section with two tables summarizing some key points. Table 20
classifies the main contributions of the surveyed articles that study the use
of V2N bi-directional communications, and Table 21 lists a specific example
1060 application analyzed in those articles.

5. Challenges for C-V2X applications research and deployment

This section summarizes the lessons learnt from our survey and, based on
them, identifies research challenges in the use of C-V2X technologies to develop
applications for road safety and traffic efficiency. We can outline the following
1065 key findings from our survey:

1. Many works confirm the feasibility of using C-V2X technologies to imple-
ment road safety and traffic efficiency applications. Different communi-

Contributions	Related papers
V2N communications through the Uu interface	[117] [111] [103] [112] [133]
Edge processing strategies	[133]
Comparison of IEEE 802.11p with C-V2X	[117]
Differentiated quality of service	[111] [103]
Demonstration/analysis of specific applications	[112] [133] [132]
Performance evaluation tested with real-life equipment	[117] [103] [132]
Communications to support automatic driving	[133]

Table 20: Classification of contributions of surveyed papers, V2N bi-directional communications

Specific applications	Related papers
Dynamic map download and update	[112] [133] [132]

Table 21: Example of a specific application analyzed on surveyed papers, V2N bi-directional communications

cation models and C-V2X technologies have been explored to implement specific applications (in simulations or with real equipment), showing that they can perform properly.

1070

2. The type of communication that has received the most attention is V2V using periodic messages. On the other hand, V2P periodic messages and V2V multi-hop stand out for the small number of works covering these types of communications applied to road safety and traffic efficiency applications based on C-V2X technologies.

1075

3. In applications that communicate through the C-V2X PC5 interface, a degradation in performance when network load increases has been identified [83] [91] [97], but only a few works study congestion control mechanisms to deal with it.

1080

4. A related topic is resource allocation for the PC5 interface. The distributed resource allocation algorithm (S-SPS) specified by 3GPP has been thoroughly studied in the context of supporting applications, and

its weaknesses (half-duplex problem, bursts of collisions, and dealing with non-periodic or variable size messages) have been identified, with some proposals for improvement. The modifications to the algorithm in Rel. 16 still need detailed evaluation. On the other hand, in the case of resource allocation from the network, 3GPP does not define a particular allocation algorithm, and different works have proposed optimization techniques to allocate resources to different links while maximizing some properties (such as sum capacity).

5. Few works have evaluated NR technologies (NR PC5 mode 1, NR PC5 mode 2, or NR Uu). These technologies are the most appropriate to implement advanced road safety applications with high bandwidth demands. Additionally, we are still in the early stages of discovering the possibilities of applying new network paradigms such as SDN, network virtualization and network slicing in the context of road safety and traffic efficiency applications. On the other hand, the ability of MEC technology to decrease the latency in V2I and V2N based services has been confirmed in different works.
6. Different evaluation methods have been used in the surveyed papers: analytical evaluation, and experiments using simulations and tests with real equipment in test tracks and open roads. On the one hand, this shows the progress of the research on C-V2X technologies. On the other hand, there is still relatively few works reporting pilot deployments, specially compared with IEEE 802.11p-based solutions and, for the most part, simulations in the surveyed literature are based on proprietary software or custom-made modules, even for implementing common standardized functionalities.

Considering these key points and some missing ones in the literature, we identify the technological and practical challenges for using C-V2X technologies to deploy road safety and traffic efficiency applications for the connected vehicle in the real world. We highlight the following (summarized in Table 22):

Topic	Challenge
Congestion control and distributed resource allocation	Algorithms that integrate congestion control and distributed resource allocation in an efficient manner
Network-based resource allocation and advanced safety applications	Developing new algorithms for bandwidth-hungry applications
Geobroadcast	Evaluation of geobroadcast routing algorithms with C-V2X PC5 technologies
Advanced applications	Developing applications over NR PC5 and NR Uu interfaces. Explore the role of SDN, network virtualization and network slicing
Multi-operator scenarios	Interoperability and resource sharing when users of different operators communicate through an application
Experimentation - real equipment	Increase the number of test pilots and real life demonstration of applications
Experimentation - simulation tools	Adopt and support common set of simulation tools that implement the complete set of C-V2X technologies and the rest of the protocol stack up to the application layer
Hybrid solutions	Compatibility approaches and the study of the benefits of combining the service of different interfaces (IEEE 802.11p, LTE PC5, NR PC5 and NR Uu).
Business models	Design business models to drive the deployment of vehicular networks

Table 22: Research challenges in C-V2X based road safety and traffic efficiency applications

1. **Congestion control and distributed resource allocation:** The performance of the vehicular network must be robust regardless of network load but, since different situations can involve very different numbers of vehicles and other actors (pedestrians, RSUs), the network load cannot be anticipated, and a congestion control mechanism to deal with situations in which the offered load degrades network performance is needed. There are several proposals, such as using the congestion control algorithms defined for IEEE 802.11p-based protocol stacks [94] [101], or defining new

ones [102]. ETSI has standardized a solution [138] for congestion control in the PC5 interface, but it is a simple one based on states, an approach that has been proved inferior to linear control systems in the extensive literature on the topic in IEEE 802.11p-based approaches [139] [140]. The interaction of the congestion control mechanism with a scheduling based on semi-persistent assignment of resources, which introduces a delay to the adaptation of message rates, requires further investigation. Additionally, the relation with the HARQ mechanism used in the PC5 interface, which sends each packet twice (or even more in the case of NR PC5) to increase reliability, has to be evaluated.

2. **Network-based resource allocation and advanced safety applications:** Advanced applications for road safety and traffic efficiency may require large spectrum resources to support point-to-point bi-directional links between pairs of vehicles, and between vehicles and the network. There can be scenarios with dedicated spectrum for advanced vehicular applications, or scenarios where these applications share the spectrum with cellular users. In both cases, network-based allocation of resources enables the efficient sharing of resources, but there is the need to develop resource allocation algorithms optimized for the requirements of different advanced vehicular applications.

3. **Geobroadcast:** Different applications for the connected vehicle are based on extending the coverage of ITS messages by forwarding them in an geographical area of interest, potentially over multiple hops across vehicles. For example, this approach can be used to warn vehicles of an incident in a motorway and give them more time to react or even take a detour, or it can be used in a green light optimized speed advisory system to provide more time to adapt the speed of vehicles to avoid having to stop at the traffic light. This support of multiple-hop communications can be provided by forwarding algorithms that have already been studied in the context of IEEE 802.11p-based protocol stacks, with solutions such as the Greedy forwarding and Contention-Based Forwarding (CBF) algorithms

[141]. These solutions could be applied to D2D PC5 technology, but this has to be carefully analyzed because the particularities of the S-SPS algorithm, such as the granularity of the possible times between consecutive messages or the introduced delay, which may have important implications to the performance of CBF in particular. On the other hand, there are opportunities to complement the forwarding of messages through other vehicles with relaying messages through the infrastructure. Message relaying is, in fact, a topic under study in future 3GPP releases (Release 17).

1155
1160

4. **Advanced applications:** One of the objectives of C-V2X is to enable services beyond the basic ones considered in 802.11p-based networks. The combination of D2D communication services between vehicles with the ability of 5G networks to fulfill both ultra-low latency requirements and high bandwidth demands opens up possibilities for applications such as see-through, remote driving, massive sharing of sensor information, and many others. However, much more work is needed to explore how to use the most recent C-V2X solutions and related technologies to implement these applications (5G NR mode 1, 5G NR mode 2, 5G NR Uu, MEC, SDN, network virtualization and network slicing) since most works in the C-V2X literature are still dealing with basic applications.

1165
1170
1175
1180

5. **Multi-operator scenarios:** Applications for the connected vehicle have to support interoperability for users from different network operators, while keeping the strict latency requirements of safety applications. This could be challenging, in particular when processing is done at the edge of an operator network to improve performance. In D2D technologies with network assistance, the assignment of resources from base stations of different operators has to be coordinated. Even in D2D communications without network assistance, some operation parameters are configured in advance when the device is connected to the network. A solution would require coordination between operators and cells. For example, spectrum management seems particularly challenging.

6. **Experimentation:** While a wide variety of evaluation tools are avail-

able for IEEE 802.11p-based vehicular networks, this has not been the
1185 case so far for C-V2X technologies, although this situation is improving
rapidly. For example, low-priced IEEE 802.11p cards are available, allow-
ing experiments with real equipment. Recently, commercial equipment
supporting C-V2X technologies, in particular LTE PC5 mode 4, is being
made available [142], although at a cost that can be an order of magnitude
1190 higher than IEEE 802.11p equipment. As for simulation tools, the use of
many custom-made and proprietary software that we have observed in the
evaluation part of works in the literature makes more difficult to compare
the different results and may hinder efforts to replicate results. There are
established open source simulators that implement IEEE 802.11p-based
1195 protocol stacks such as Artery [143] and Veins [144]), which also imple-
ment scenarios with D2D C-V2X communications using OMNET++ and
SimuLTE [145]. A more recent work includes an extension to Artery and
Veins, called Open C-V2X [146], which takes advantage of the Artery im-
plementation of the ETSI ITS stack and adds D2D capabilities including
1200 a Rel. 14 Mode 4 scenario. Artery-C [147] is another Artery-based toolkit
that has recently come to light which the authors intend to publish as
open source. Moreover, there are simulation tools based on ns-3 (e.g., ns-
3_c-v2x [148]) that model C-V2X Mode 4, however, the aforementioned
solution focuses more on the lower layers rather than on the Facilities
1205 or Application layers (e.g., ns3_c-v2x only sends dummy packets at fixed
rates to simulate CAMs or BSMs). Outside of the open-source commu-
nity, there are simulation tools (e.g., LTEV2Vsim [149]) that use Matlab,
which also provides an LTE toolbox which supports V2X and sidelink
direct communications. Therefore, the tools are beginning to be avail-
1210 able, and the research and open-source community has to support and use
established simulation tools, which would make easier the exchange and
replicability of results. This point is even more challenging due to the
evolution of C-V2X technologies (such as 5G NR PC5), so there is a need
to implement these new technologies in real equipment and simulators and

1215

make them available to the research community.

1220

1225

7. **Hybrid solutions:** The combination of IEEE 802.11p for V2V communications and LTE Uu for V2I and V2N communications has received some attention in the literature [150] [151] [152] [153]. However, the role of networks based on IEEE 802.11p and their potential combination with C-V2X networks through the PC5 and Uu interface is still an open issue, with some initial works exploring architectures for heterogeneous access networks [154] [155] and others looking at the co-existence of IEEE 802.11p and LTE PC5 mode 4 in the same radio channel [156]. Even within C-V2X technologies, the role of the different interfaces — LTE PC5, NR PC5, and NR Uu — in the provision of services is also an open issue. More research is needed on compatibility approaches and on how specific applications or set of applications could benefit from combining the service provided by different interfaces.

1230

1235

8. **Business models:** There is a great challenge in investigating business models that can drive the deployment of vehicular networks [157]. While Business-to-Consumer (B2C) models are challenging from the business side (e.g., resource consumption from cloud-based V2P safety applications, multi-operator scenarios) and the consumer side (e.g., privacy concerns, data and battery consumption), Business-to-Business (B2B) models can provide a niche for operators, vehicle manufacturers, and government agencies (e.g., the X as a Service (aaS) business model). It is believed there might be players that would more clearly have business opportunities in the context of C-V2X technologies, but this requires further investigation, particularly with D2D technologies.

1240

6. Conclusion

This article reviews the literature on the use of C-V2X technologies to develop road safety and traffic efficiency applications for connected vehicles. After describing the relevant C-V2X communication technologies, we have proposed a

classification for the different types of communication needed to support applica-
1245 tions for connected vehicles. Following that classification, we have described how
the research community has analyzed and validated the use of C-V2X technolo-
gies specified by 3GPP to develop road safety and traffic efficiency applications,
exploring its limitations, and proposing improvements that have contributed to
specifications development. These works have shown the different ways in which
1250 C-V2X communications technologies can be used to implement communication-
based applications in vehicles. However, this survey also identifies the need for
more work in several fields of research: the C-V2X technologies are evolving
and there is the need to explore the possibilities of their most recent versions
(e.g., 5G NR PC5 or NR Uu in combination with technologies such as MEC);
1255 the development and validation of advanced services; the combination of differ-
ent technologies to provide V2X services; the interoperability in multi-operator
scenarios; and the business and deployment models that can drive the adoption
of the C-V2X technology in the real world.

References

- 1260 [1] European Telecommunications Standards Institute (ETSI), Intelligent
Transport Systems (ITS); Communications Architecture, ETSI EN 302
665 V1.1.1 (September 2010).
- [2] European Telecommunications Standards Institute (ETSI), Intelligent
Transport Systems (ITS); ITS-G5 Access layer specification for Intelli-
1265 gent Transport Systems operating in the 5 GHz frequency band, ETSI
EN 302 663 V1.3.1 (January 2020).
- [3] J. B. Kenney, Dedicated Short-Range Communications (DSRC) Standards
in the United States, *Proceedings of the IEEE* 99 (7) (2011) 1162–1182.
[doi:10.1109/JPROC.2011.2132790](https://doi.org/10.1109/JPROC.2011.2132790).
- 1270 [4] Institute of Electrical and Electronics Engineers (IEEE), IEEE Standard
for Information Technology– Telecommunications and Information Ex-

- change between Systems Local and Metropolitan Area Networks– Specific Requirements Part 11: Wireless LAN Medium Access Control (MAC) and Physical Layer (PHY) Specifications, IEEE Standard 802.11-2020 (September 2020).
- 1275
- [5] InterCor Project, Interoperable Corridors deploying cooperative intelligent transport systems; September 2016-August 2019, <https://intercor-project.eu/> (Accessed: June 2021).
- [6] Intelligent Transportation Systems Joint Program Office – United States Department of Transportation, Connected Vehicle Pilot Deployment Program, <https://www.its.dot.gov/pilots/index.htm> (Accessed: June 2021).
- 1280
- [7] The 3rd Generation Partnership Project (3GPP), <https://www.3gpp.org> (Accessed: June 2021).
- [8] Federal Communications Commission (FCC), Use of the 5.850-5.925 GHz Band, FCC 20-164 (November 2020).
- 1285
- [9] G. Araniti, C. Campolo, M. Condoluci, A. Iera, A. Molinaro, LTE for vehicular networking: a survey, *IEEE Communications Magazine* 51 (5) (2013) 148–157. doi:10.1109/MCOM.2013.6515060.
- [10] B. M. Masini, A. Bazzi, A. Zanella, A Survey on the Roadmap to Mandate on Board Connectivity and Enable V2V-Based Vehicular Sensor Networks, *Sensors* 18 (7) (2018). doi:10.3390/s18072207.
- 1290
- [11] P. K. Singh, S. K. Nandi, S. Nandi, A tutorial survey on vehicular communication state of the art, and future research directions, *Vehicular Communications* 18 (2019) 100164. doi:10.1016/j.vehcom.2019.100164.
- 1295
- [12] M. N. Ahangar, Q. Z. Ahmed, F. A. Khan, M. Hafeez, A Survey of Autonomous Vehicles: Enabling Communication Technologies and Challenges, *Sensors* 21 (3) (2021). doi:10.3390/s21030706.

- 1300 [13] S. Chen, J. Hu, Y. Shi, L. Zhao, W. Li, A Vision of C-V2X: Technologies, Field Testing, and Challenges With Chinese Development, *IEEE Internet of Things Journal* 7 (5) (2020) 3872–3881. doi:10.1109/JIOT.2020.2974823.
- [14] S. Gyawali, S. Xu, Y. Qian, R. Q. Hu, Challenges and Solutions for Cellular Based V2X Communications, *IEEE Communications Surveys & Tutorials* 23 (1) (2021) 222–255. doi:10.1109/COMST.2020.3029723.
- 1305 [15] A. Bazzi, A. O. Berthet, C. Campolo, B. M. Masini, A. Molinaro, A. Zanella, On the Design of Sidelink for Cellular V2X: A Literature Review and Outlook for Future, *IEEE Access* 9 (2021) 97953–97980. doi:10.1109/ACCESS.2021.3094161.
- 1310 [16] A. Alalewi, I. Dayoub, S. Cherkaoui, On 5G-V2X Use Cases and Enabling Technologies: A Comprehensive Survey, *IEEE Access* 9 (2021) 107710–107737. doi:10.1109/ACCESS.2021.3100472.
- [17] J. Jeong, Y. Shen, T. Oh, S. Céspedes, N. Benamar, M. Wetterwald, J. Härrri, A comprehensive survey on vehicular networks for smart roads: A focus on IP-based approaches, *Vehicular Communications* 29 (2021) 100334. doi:10.1016/j.vehcom.2021.100334.
- 1315 [18] M. Lee, T. Atkison, VANET applications: Past, present, and future, *Vehicular Communications* 28 (2021) 100310. doi:10.1016/j.vehcom.2020.100310.
- 1320 [19] Y. Toor, P. Muhlethaler, A. Laouiti, A. D. La Fortelle, Vehicle Ad Hoc networks: applications and related technical issues, *IEEE Communications Surveys & Tutorials* 10 (3) (2008) 74–88. doi:10.1109/COMST.2008.4625806.
- 1325 [20] H. H. Jeong, Y. C. Shen, J. P. Jeong, T. T. Oh, A comprehensive survey on vehicular networking for safe and efficient driving in smart transportation:

A focus on systems, protocols, and applications, *Vehicular Communications* 31 (2021) 100349. doi:10.1016/j.vehcom.2021.100349.

- 1330 [21] A. Bazzi, G. Cecchini, M. Menarini, B. M. Masini, A. Zanella, Survey and Perspectives of Vehicular Wi-Fi versus Sidelink Cellular-V2X in the 5G Era, *Future Internet* 11 (6) (2019). doi:10.3390/fi11060122.
- [22] H. Zhou, W. Xu, J. Chen, W. Wang, Evolutionary V2X Technologies Toward the Internet of Vehicles: Challenges and Opportunities, *Proceedings of the IEEE* 108 (2) (2020) 308–323. doi:10.1109/JPROC.2019.2961937.
- 1335 [23] C. R. Storck, F. Duarte-Figueiredo, A Survey of 5G Technology Evolution, Standards, and Infrastructure Associated With Vehicle-to-Everything Communications by Internet of Vehicles, *IEEE Access* 8 (2020) 117593–117614. doi:10.1109/ACCESS.2020.3004779.
- [24] M. Allouch, S. Kallel, A. Soua, O. Shagdar, S. Tohme, Survey on radio resource allocation in long-term evolution-vehicle, *Concurrency and Computation: Practice and Experience* (2021) 1–17doi:https://doi.org/10.1002/cpe.6228.
- 1340 [25] T. T. Thanh Le, S. Moh, Comprehensive Survey of Radio Resource Allocation Schemes for 5G V2X Communications, *IEEE Access* 9 (2021) 123117–123133. doi:10.1109/ACCESS.2021.3109894.
- 1345 [26] A. Masmoudi, K. Mnif, F. Zarai, A Survey on Radio Resource Allocation for V2X Communication, *Wireless Communications and Mobile Computing* 2019 (3) (2019) 1–12. doi:10.1155/2019/2430656.
- [27] M. Muhammad, G. A. Safdar, Survey on existing authentication issues for cellular-assisted V2X communication, *Vehicular Communications* 12 (2018) 50–65. doi:https://doi.org/10.1016/j.vehcom.2018.01.008.
- 1350 [28] F. Tang, Y. Kawamoto, N. Kato, J. Liu, Future Intelligent and Secure Vehicular Network Toward 6G: Machine-Learning Approaches, *Proceedings of the IEEE* 108 (2) (2020) 292–307. doi:10.1109/JPROC.2019.2954595.

- 1355 [29] W. Guo, M. Fuentes, L. Christodoulou, B. Mouhouche, Roads to Multi-
media Broadcast Multicast Services in 5G New Radio, in: IEEE International Symposium on Broadband Multimedia Systems and Broadcasting (BMSB), 2018, pp. 1–5. doi:10.1109/BMSB.2018.8436874.
- [30] D. Gomez-Barquero, J. J. Gimenez, R. Beutler, 3GPP Enhancements for
1360 Television Services: LTE-Based 5G Terrestrial Broadcast, John Wiley & Sons, Inc., 2020, pp. 1–10. doi:10.1002/047134608X.W8410.
- [31] D. Martín-Sacristán, S. Roger, D. Garcia-Roger, J. F. Monserratt, P. Spapis, A. Kousaridas, C. Zhou, Low-latency V2X Communication Through
Localized MBMS with Local V2X Servers Coordination, in: IEEE International Symposium on Broadband Multimedia Systems and Broadcasting
1365 (BMSB), 2018, pp. 1–8. doi:10.1109/BMSB.2018.8436758.
- [32] 3rd Generation Partnership Project (3GPP), Technical Specification Group Core Network and Terminals; Proximity-services (ProSe) User Equipment (UE) to ProSe function protocol aspects; Stage 3 (Release 12), 3GPP TS 24.334 V12.5.0 (December 2015).
- 1370 [33] X. Lin, J. G. Andrews, A. Ghosh, R. Ratasuk, An overview of 3GPP device-to-device proximity services, IEEE Communications Magazine 52 (4) (2014) 40–48. doi:10.1109/MCOM.2014.6807945.
- [34] 3rd Generation Partnership Project (3GPP), Technical Specification Group Radio Access Network; Study on LTE Device to Device Proximity
1375 Services; Radio Aspects (Release 12), 3GPP TR 36.843 V12.0.1 (March 2014).
- [35] 3rd Generation Partnership Project (3GPP), Technical Specification Group Radio Access Network; Study on LTE-based V2X Services; (Release 14), 3GPP TR 36.885 V14.0.0 (June 2016).
- 1380 [36] 3rd Generation Partnership Project (3GPP), Technical Specification Group Radio Access Network; Evolved Universal Terrestrial Radio Ac-

cess (E-UTRA); Physical layer procedures (Release 14), 3GPP TS 36.213 V14.4.0 (September 2017).

- 1385 [37] 3rd Generation Partnership Project (3GPP), Technical Specification Group Radio Access Network; Evolved Universal Terrestrial Radio Access (E-UTRA); Physical channels and modulation (Release 14), 3GPP TS 36.211 V14.4.0 (September 2017).
- 1390 [38] 3rd Generation Partnership Project (3GPP), Technical Specification Group Radio Access Network; Evolved Universal Terrestrial Radio Access (E-UTRA) and Evolved Universal Terrestrial Radio Access Network (E-UTRAN); Overall description; Stage 2 (Release 14), 3GPP TS 36.300 V14.4.0 (September 2017).
- 1395 [39] R. Molina-Masegosa, J. Gozalvez, LTE-V for Sidelink 5G V2X Vehicular Communications: A New 5G Technology for Short-Range Vehicle-to-Everything Communications, *IEEE Vehicular Technology Magazine* 12 (4) (2017) 30–39. doi:10.1109/MVT.2017.2752798.
- 1400 [40] A. Bazzi, C. Campolo, A. Molinaro, A. O. Berthet, B. M. Masini, A. Zanella, On Wireless Blind Spots in the C-V2X Sidelink, *IEEE Transactions on Vehicular Technology* 69 (8) (2020) 9239–9243. doi:10.1109/TVT.2020.3001074.
- [41] S. Bartoletti, B. M. Masini, V. Martinez, I. Sarris, A. Bazzi, Impact of the Generation Interval on the Performance of Sidelink C-V2X Autonomous Mode, *IEEE Access* 9 (2021) 35121–35135. doi:10.1109/ACCESS.2021.3061913.
- 1405 [42] M. Gonzalez-Martín, M. Sepulcre, R. Molina-Masegosa, J. Gozalvez, Analytical Models of the Performance of C-V2X Mode 4 Vehicular Communications, *IEEE Transactions on Vehicular Technology* 68 (2) (2019) 1155–1166. doi:10.1109/TVT.2018.2888704.

- 1410 [43] M. H. Castañeda Garcia, A. Molina-Galan, M. Boban, J. Gozalvez, B. Coll-Perales, T. Şahin, A. Kousaridas, A Tutorial on 5G NR V2X Communications, *IEEE Communications Surveys & Tutorials* 23 (3) (2021) 1972–2026. doi:10.1109/COMST.2021.3057017.
- [44] Z. Ali, S. Lagén, L. Giupponi, R. Rouil, 3GPP NR V2X Mode 2: Overview, Models and System-Level Evaluation, *IEEE Access* 9 (2021) 89554–89579. doi:10.1109/ACCESS.2021.3090855.
- 1415 [45] 3rd Generation Partnership Project (3GPP), Technical Specification Group Radio Access Network; Overall description of Radio Access Network (RAN) aspects for Vehicle-to-everything (V2X) based on LTE and NR (Release 16), 3GPP TR 37.985 V16.0.0 (June 2020).
- 1420 [46] 3rd Generation Partnership Project (3GPP), Technical Specification Group Radio Access Network; NR; Medium Access Control (MAC) protocol specification (Release 16), 3GPP TS 38.321 V16.4.0 (March 2021).
- [47] 3rd Generation Partnership Project (3GPP), Technical Specification Group Radio Access Network; NR; Physical layer procedures for data (Release 16), 3GPP TS 38.214 V16.5.0 (March 2021).
- 1425 [48] W. Xia, Y. Wen, C. H. Foh, D. Niyato, H. Xie, A Survey on Software-Defined Networking, *IEEE Communications Surveys & Tutorials* 17 (1) (2015) 27–51. doi:10.1109/COMST.2014.2330903.
- [49] W. Stallings, *Foundations of Modern Networking: SDN, NFV, QoE, IoT, and Cloud*, Addison-Wesley Professional, 2015.
- 1430 [50] R. Mijumbi, J. Serrat, J.-L. Gorricho, N. Bouten, F. De Turck, R. Boutaba, Network Function Virtualization: State-of-the-Art and Research Challenges, *IEEE Communications Surveys & Tutorials* 18 (1) (2016) 236–262. doi:10.1109/COMST.2015.2477041.

- 1435 [51] C. Campolo, A. Molinaro, A. Iera, F. Menichella, 5G Network Slicing
for Vehicle-to-Everything Services, *IEEE Wireless Communications* 24 (6)
(2017) 38–45. doi:10.1109/MWC.2017.1600408.
- [52] I. Afolabi, T. Taleb, K. Samdanis, A. Ksentini, H. Flinck, Network Slicing
and Softwarization: A Survey on Principles, Enabling Technologies, and
1440 Solutions, *IEEE Communications Surveys & Tutorials* 20 (3) (2018) 2429–
2453. doi:10.1109/COMST.2018.2815638.
- [53] F. Spinelli, V. Mancuso, Toward Enabled Industrial Verticals in 5G:
A Survey on MEC-Based Approaches to Provisioning and Flexibility,
IEEE Communications Surveys & Tutorials 23 (1) (2021) 596–630. doi:
1445 10.1109/COMST.2020.3037674.
- [54] European Telecommunications Standards Institute (ETSI), Multi-access
Edge Computing (MEC); Framework and Reference Architecture, ETSI
GS MEC 003 V2.2.1 (December 2020).
- [55] 3rd Generation Partnership Project (3GPP), Technical Specification
1450 Group Services and System Aspects; Service requirements for V2X ser-
vices; Stage 1 (Release 16) , 3GPP TS 22.185 V16.0.0 (July 2020).
- [56] CAMP Vehicle Safety Communications Consortium, Vehicle Safety
Communications Project Task 3 Final Report; Identify Intelligent Vehicle
Safety Applications Enabled by DSRC, Technical report (March 2005).
1455 URL [https://www.nhtsa.gov/sites/nhtsa.dot.gov/files/
camp3scr.pdf](https://www.nhtsa.gov/sites/nhtsa.dot.gov/files/camp3scr.pdf)
- [57] 3rd Generation Partnership Project (3GPP), Technical Specification
Group Services and System Aspects; Study on LTE support for Vehi-
cle to Everything (V2X) services (Release 14), 3GPP TR 22.885 V14.0.0
1460 (December 2015).
- [58] 3rd Generation Partnership Project (3GPP), Technical Specification
Group Services and System Aspects; Study on enhancement of 3GPP

Support for 5G V2X Services (Release 16), 3GPP TR 22.886 V16.2.0 (December 2018).

- 1465 [59] European Telecommunications Standards Institute (ETSI), Intelligent Transport Systems (ITS); Vehicular Communications; Basic Set of Applications; Definitions, ETSI TR 102.638 V1.1.1 (June 2009).
- [60] European Telecommunications Standards Institute (ETSI), Intelligent Transport Systems (ITS); Vehicular communications; Basic set of Applications; Part 2: Specification of Cooperative Awareness Basic Service, 1470 ETSI EN 302 637-2, V1.4.1 (April 2019).
- [61] SAE International, V2X Communications Message Set Dictionary, SAE J2735 (July 2020).
- [62] Platform for the Deployment of Cooperative Intelligent Transport Systems in the EU (C-ITS Platform), C-ITS Platform Final Report, Tech. 1475 rep., EU DG MOVE - DG Mobility and Transport (January 2016).
URL <https://ec.europa.eu/transport/sites/default/files/themes/its/doc/c-its-platform-final-report-january-2016.pdf>
- [63] C-ROADS Platform, Implemented Services, <https://www.c-roads.eu/pilots/implemented-services.html> (Accessed: September 2021). 1480
- [64] W. Sun, D. Yuan, E. G. Ström, F. Brännström, Cluster-Based Radio Resource Management for D2D-Supported Safety-Critical V2X Communications, IEEE Transactions on Wireless Communications 15 (4) (2016) 2756–2769. doi:10.1109/TWC.2015.2509978.
- 1485 [65] A. Bazzi, B. M. Masini, A. Zanella, I. Thibault, Beaconing from connected vehicles: IEEE 802.11p vs. LTE-V2V, in: IEEE 27th Annual International Symposium on Personal, Indoor, and Mobile Radio Communications (PIMRC), 2016, pp. 1–6. doi:10.1109/PIMRC.2016.7794598.

- 1490 [66] H. Soleimani, A. Boukerche, D2D scheme for vehicular safety applications in LTE advanced network, in: IEEE International Conference on Communications (ICC), 2017, pp. 1–6. doi:10.1109/ICC.2017.7996365.
- [67] H. Soleimani, A. Boukerche, A comparative study of possible solutions for transmission of vehicular safety messages in LTE-based networks, in: IEEE 28th Annual International Symposium on Personal, Indoor, and Mobile Radio Communications (PIMRC), 2017, pp. 1–5. doi:10.1109/PIMRC.2017.8292721.
- 1495 [68] L. Gallo, J. Haerri, Unsupervised Long-Term Evolution Device-to-Device: A Case Study for Safety-Critical V2X Communications, IEEE Vehicular Technology Magazine 12 (2) (2017) 69–77. doi:10.1109/MVT.2017.2669346.
- 1500 [69] H. Peng, D. Li, Q. Ye, K. Abboud, H. Zhao, W. Zhuang, X. S. Shen, Resource allocation for D2D-enabled inter-vehicle communications in multiplatoons, in: IEEE International Conference on Communications (ICC), 2017, pp. 1–6. doi:10.1109/ICC.2017.7996594.
- 1505 [70] A. Bazzi, B. M. Masini, A. Zanella, I. Thibault, On the Performance of IEEE 802.11p and LTE-V2V for the Cooperative Awareness of Connected Vehicles, IEEE Transactions on Vehicular Technology 66 (11) (2017) 10419–10432. doi:10.1109/TVT.2017.2750803.
- [71] R. Kawasaki, H. Onishi, T. Murase, Performance evaluation on V2X communication with PC5-based and Uu-based LTE in Crash Warning Application, in: IEEE 6th Global Conference on Consumer Electronics (GCCE), 2017, pp. 1–2. doi:10.1109/GCCE.2017.8229434.
- 1510 [72] H. Peng, D. Li, Q. Ye, K. Abboud, H. Zhao, W. Zhuang, X. Shen, Resource Allocation for Cellular-based Inter-Vehicle Communications in Autonomous Multiplatoons, IEEE Transactions on Vehicular Technology 66 (12) (2017) 11249–11263. doi:10.1109/TVT.2017.2723430.
- 1515

- [73] M. Gharba, H. Cao, S. Gangakhedkar, J. Eichinger, A. R. Ali, K. Ganesan, V. Jain, S. Lapoehn, T. Frankiewicz, T. Hesse, Y. Zou, C. Tang, L. Gu, 5G enabled cooperative collision avoidance: System design and field test, in: IEEE 18th International Symposium on A World of Wireless, Mobile and Multimedia Networks (WoWMoM), 2017, pp. 1–6. doi:10.1109/WoWMoM.2017.7974355.
- [74] C. Campolo, A. Molinaro, G. Araniti, A. O. Berthet, Better Platooning Control Toward Autonomous Driving : An LTE Device-to-Device Communications Strategy That Meets Ultralow Latency Requirements, IEEE Vehicular Technology Magazine 12 (1) (2017) 30–38. doi:10.1109/MVT.2016.2632418.
- [75] V. Vukadinovic, K. Bakowski, P. Marsch, I. D. Garcia, H. Xu, M. Sybis, P. Sroka, K. Wesolowski, D. Lister, I. Thibault, 3GPP C-V2X and IEEE 802.11p for Vehicle-to-Vehicle communications in highway platooning scenarios, Ad Hoc Networks 74 (2018) 17–29. doi:10.1016/j.adhoc.2018.03.004.
- [76] H. Soleimani, A. Boukerche, On vehicular safety message transmissions through LTE-Advanced networks, Ad Hoc Networks 79 (2018) 133–145. doi:10.1016/j.adhoc.2018.06.016.
- [77] R. Wang, J. Wu, J. Yan, Resource Allocation for D2D-Enabled Communications in Vehicle Platooning, IEEE Access 6 (2018) 50526–50537. doi:10.1109/ACCESS.2018.2868839.
- [78] S. Park, H. Yoon, B. Kim, S. Choi, FAGA: Feedback-Aided Greedy Algorithm for Periodic Messages in LTE V2V Communications, IEEE Transactions on Vehicular Technology 67 (11) (2018) 11062–11068. doi:10.1109/TVT.2018.2868515.
- [79] Z. Amjad, A. Sikora, B. Hilt, J. Lauffenburger, Low Latency V2X Applications and Network Requirements: Performance Evaluation, in: IEEE

- 1545 Intelligent Vehicles Symposium (IV), 2018, pp. 220–225. doi:10.1109/
IVS.2018.8500531.
- [80] D. Calabuig, D. Martín-Sacristán, M. Botsov, J. F. Monserrat,
D. Gozávez, Comparison of LTE centralized RRM and IEEE 802.11
decentralized RRM for ITS cooperative awareness, in: IEEE Wireless
1550 Communications and Networking Conference (WCNC), 2018, pp. 1–6.
doi:10.1109/WCNC.2018.8377152.
- [81] D. Martín-Sacristán, S. Roger, D. Garcia-Roger, J. F. Monserrat,
A. Kousaridas, P. Spapis, S. Ayaz, C. Zhou, Evaluation of LTE-Advanced
connectivity options for the provisioning of V2X services, in: IEEE Wire-
1555 less Communications and Networking Conference (WCNC), 2018, pp. 1–6.
doi:10.1109/WCNC.2018.8377183.
- [82] G. Nardini, A. Viridis, C. Campolo, A. Molinaro, G. Stea, Cellular-V2X
Communications for Platooning: Design and Evaluation, *Sensors* 18 (5)
(2018) 1527. doi:10.3390/s18051527.
- 1560 [83] R. Molina-Masegosa, J. Gozalvez, M. Sepulcre, Configuration of the C-
V2X Mode 4 Sidelink PC5 Interface for Vehicular Communication, in:
14th International Conference on Mobile Ad-Hoc and Sensor Networks
(MSN), 2018, pp. 43–48. doi:10.1109/MSN.2018.00014.
- [84] S. K. Gupta, J. Y. Khan, D. T. Ngo, Cluster-based D2D architecture for
1565 safety services in vehicular ad hoc networks, in: IEEE Wireless Commu-
nications and Networking Conference Workshops (WCNCW), 2018, pp.
43–48. doi:10.1109/WCNCW.2018.8368992.
- [85] S. K. Gupta, J. Y. Khan, D. T. Ngo, A D2D Multicast Network Archi-
1570 tecture for Vehicular Communications, in: IEEE 89th Vehicular Tech-
nology Conference (VTC2019-Spring), 2019, pp. 1–6. doi:10.1109/
VTCSpring.2019.8746673.

- [86] X. Peng, H. Zhou, B. Qian, K. Yu, N. Cheng, X. Shen, Security-Aware Resource Sharing for D2D Enabled Multiplatooning Vehicular Communications, in: IEEE 90th Vehicular Technology Conference (VTC2019-Fall), 2019, pp. 1–6. doi:10.1109/VTCFall.2019.8891599.
- [87] R. Geng, H. Ren, J. Yan, User Satisfaction-Aware Resource Allocation for 5G Green Vehicle Platooning, in: International Conference on Internet of Things (iThings) and IEEE Green Computing and Communications (GreenCom) and IEEE Cyber, Physical and Social Computing (CPSCom) and IEEE Smart Data (SmartData), 2019, pp. 868–873. doi:10.1109/iThings/GreenCom/CPSCom/SmartData.2019.00156.
- [88] S. Hegde, O. Blume, R. Shrivastava, H. Bakker, Enhanced Resource Scheduling for Platooning in 5G V2X Systems, in: IEEE 2nd 5G World Forum (5GWF), 2019, pp. 108–113. doi:10.1109/5GWF.2019.8911647.
- [89] S. Mignardi, C. Buratti, A. Bazzi, R. Verdone, Trajectories and Resource Management of Flying Base Stations for C-V2X, *Sensors* 19 (4) (2019) 811. doi:10.3390/s19040811.
- [90] F. A. Schiegg, N. Brahmi, I. Llatser, Analytical Performance Evaluation of the Collective Perception Service in C-V2X Mode 4 Networks, in: 2019 IEEE Intelligent Transportation Systems Conference (ITSC), 2019, pp. 181–188. doi:10.1109/ITSC.2019.8917214.
- [91] S. Sabeeh, P. Sroka, K. Wesolowski, Estimation and Reservation for Autonomous Resource Selection in C-V2X Mode 4, in: IEEE 30th Annual International Symposium on Personal, Indoor and Mobile Radio Communications (PIMRC), 2019, pp. 1–6. doi:10.1109/PIMRC.2019.8904095.
- [92] T. Shimizu, H. Lu, J. Kenney, S. Nakamura, Comparison of DSRC and LTE-V2X PC5 Mode 4 Performance in High Vehicle Density Scenarios, in: 26th ITS World Congress, 2019, pp. 1–10.

- [93] CAMP C-V2X Consortium, C-V2X Performance Assessment Project, Report (December 2019).
1600 URL <https://www.camp11c.org/project-cellular-v2x-device-to-device-communication-c-v2x/>
- [94] 5G Automotive Association (5GAA), V2X Functional and Performance Test Report; Test Procedures and Results, Technical report (April 2019).
1605 URL https://5gaa.org/wp-content/uploads/2019/06/5GAA_P-190033_V2X-Functional-and-Performance-Test-Report_final-1.pdf
- [95] I. Llatser, T. Michalke, M. Dolgov, F. Wildschütte, H. Fuchs, Cooperative Automated Driving Use Cases for 5G V2X Communication, in: IEEE 2nd 5G World Forum (5GWF), 2019, pp. 120–125. doi:10.1109/5GWF.2019.8911628.
1610
- [96] R. Molina-Masegosa, J. Gozalvez, M. Sepulcre, Comparison of IEEE 802.11p and LTE-V2X: An Evaluation With Periodic and Aperiodic Messages of Constant and Variable Size, IEEE Access 8 (2020) 121526–121548.
1615 doi:10.1109/ACCESS.2020.3007115.
- [97] T. Hirai, T. Murase, Performance Evaluations of PC5-based Cellular-V2X Mode 4 for Feasibility Analysis of Driver Assistance Systems with Crash Warning, Sensors 20 (10) (2020) 2950. doi:10.3390/s20102950.
- [98] F. Romeo, C. Campolo, A. Molinaro, A. O. Berthet, Asynchronous Traffic on the Sidelink of 5G V2X, in: IEEE International Conference on Communications Workshops (ICC Workshops), 2020, pp. 1–6.
1620 doi:10.1109/ICCWorkshops49005.2020.9145466.
- [99] F. Romeo, C. Campolo, A. Molinaro, A. O. Berthet, DENM Repetitions to Enhance Reliability of the Autonomous Mode in NR V2X Sidelink, in: IEEE 91st Vehicular Technology Conference (VTC2020-Spring), 2020, pp. 1–5. doi:10.1109/VTC2020-Spring48590.2020.9129367.
1625

- [100] M. Niebisch, T. Deinlein, D. Pfaller, R. German, A. Djanatliev, Impact of the Communication Direction on the Reliability of Vehicle-to-Everything (V2X) Communications, in: IEEE Vehicular Networking Conference (VNC), 2020, pp. 1–7. doi:10.1109/VNC51378.2020.9318416.
1630
- [101] T. Shimizu, B. Cheng, H. Lu, J. Kenney, Comparative Analysis of DSRC and LTE-V2X PC5 Mode 4 with SAE Congestion Control, in: IEEE Vehicular Networking Conference (VNC), 2020, pp. 1–8. doi:10.1109/VNC51378.2020.9318353.
- [102] J. Choi, H. Kim, A QoS-Aware Congestion Control Scheme for C-V2X Safety Communications, in: IEEE Vehicular Networking Conference (VNC), 2020, pp. 1–4. doi:10.1109/VNC51378.2020.9318385.
1635
- [103] Connected Vehicle to Everything of Tomorrow (ConVeX), Final Report on Field Test and Evaluation Results, Technical Report D7.1 V1.0 (March 2020).
1640
URL https://convex-project.de/onewebmedia/D7.1_Final_Report_Field.pdf
- [104] A. Lekidis, F. Bouali, C-V2X network slicing framework for 5G-enabled vehicle platooning applications, in: IEEE 93rd Vehicular Technology Conference (VTC2021-Spring), 2021, pp. 1–7. doi:10.1109/VTC2021-Spring51267.2021.9448769.
1645
- [105] M. Segata, P. Arvani, R. L. Cigno, A Critical Assessment of C-V2X Resource Allocation Scheme for Platooning Applications, in: 16th Annual Conference on Wireless On-demand Network Systems and Services Conference (WONS), 2021, pp. 1–8. doi:10.23919/WONS51326.2021.9415551.
1650
- [106] S. Hegde, L. Shi, N. J. Hernández Marcano, R. Shrivastava, O. Blume, R. H. Jacobsen, Sidelink Group Resource Scheduling for Platoons in Cellular Vehicle-to-Vehicle Communications, in: IEEE 93rd Vehicular Technology Conference (VTC2021-Spring), 2021, pp. 1–5. doi:10.1109/VTC2021-Spring51267.2021.9449009.
1655

- [107] F. Poli, B. Denis, V. Mannoni, V. Berg, D. Martín-Sacristán, D. Garcia-Roger, J. F. Monserrat, Evaluation of C-V2X Sidelink for Cooperative Lane Merging in a Cross-Border Highway Scenario, in: IEEE 93rd Vehicular Technology Conference (VTC2021-Spring), 2021, pp. 1–5. doi:10.1109/VTC2021-Spring51267.2021.9448998.
- 1660
- [108] C. Perfecto, J. Del Ser, M. Bennis, M. N. Bilbao, Beyond WYSIWYG: Sharing contextual sensing data through mmWave V2V communications, in: European Conference on Networks and Communications (EuCNC), 2017, pp. 1–6. doi:10.1109/EuCNC.2017.7980726.
- [109] M. Thomas, R. M. Edwards, Z. Wang, Consideration of IEEE 802.11p and proposed 5G for holograms in vehicular communication, in: 12th European Conference on Antennas and Propagation (EuCAP), 2018, pp. 1–5. doi:10.1049/cp.2018.1245.
- 1665
- [110] M. Kuttila, P. Pyykonen, Q. Huang, W. Deng, W. Lei, E. Pollakis, C-V2X Supported Automated Driving, in: IEEE International Conference on Communications Workshops (ICC Workshops), 2019, pp. 1–5. doi:10.1109/ICCW.2019.8756871.
- 1670
- [111] H. Khan, P. Luoto, M. Bennis, M. Latva-aho, On the Application of Network Slicing for 5G-V2X, in: 24th European Wireless Conference, 2018, pp. 1–6.
- 1675
- [112] X. Wang, Z. Ning, X. Hu, E. C. . Ngai, L. Wang, B. Hu, R. Y. K. Kwok, A City-Wide Real-Time Traffic Management System: Enabling Crowdsensing in Social Internet of Vehicles, IEEE Communications Magazine 56 (9) (2018) 19–25. doi:10.1109/MCOM.2018.1701065.
- [113] S. K. Gupta, J. Y. Khan, D. T. Ngo, Clustered Multicast Protocols for Warning Message Transmissions in a VANET, in: IEEE Vehicular Networking Conference (VNC), 2019, pp. 1–8. doi:10.1109/VNC48660.2019.9062775.
- 1680

- [114] S. A. Alghamdi, Novel path similarity aware clustering and safety message dissemination via mobile gateway selection in cellular 5G-based V2X and D2D communication for urban environment, *Ad Hoc Networks* 103 (2020) 102150. doi:10.1016/j.adhoc.2020.102150.
- [115] M. Emara, M. C. Filippou, D. Sabella, MEC-Assisted End-to-End Latency Evaluations for C-V2X Communications, in: *European Conference on Networks and Communications (EuCNC)*, 2018, pp. 1–9. doi:10.1109/EuCNC.2018.8442825.
- [116] Q.-H. Nguyen, M. Morold, K. David, F. Dressler, Car-to-Pedestrian communication with MEC-support for adaptive safety of vulnerable road users, *Computer Communications* 150 (2020) 83–93. doi:10.1016/j.comcom.2019.10.033.
- [117] Z. Xu, X. Li, X. Zhao, M. H. Zhang, Z. Wang, DSRC versus 4G-LTE for Connected Vehicle Applications: A Study on Field Experiments of Vehicular Communication Performance, *Journal of Advanced Transportation* (2750452) (2017) 1–10. doi:10.1155/2017/2750452.
- [118] Q. Guo, L. Li, X. (Jeff) Ban, Urban traffic signal control with connected and automated vehicles: A survey, *Transportation Research Part C: Emerging Technologies* 101 (2019) 313–334. doi:10.1016/j.trc.2019.01.026.
- [119] L. Miao, J. J. Virtusio, K.-L. Hua, PC5-Based Cellular-V2X Evolution and Deployment, *Sensors* 21 (3) (2021) 843. doi:10.3390/s21030843.
- [120] D. Sabella et al., Toward fully connected vehicles: Edge computing for advanced automotive communications, White paper, 5G Automotive Association (5GAA) (December 2017).
URL <http://5gaa.org/wp-content/uploads/2017/12/5GAAT-170219-whitepaper-EdgeComputing5GAA.pdf>

- [121] A. Napolitano, G. Cecchetti, F. Giannone, A. L. Ruscelli, F. Civerchia, K. Kondepu, L. Valcarenghi, P. Castoldi, Implementation of a MEC-based Vulnerable Road User Warning System, in: AEIT International Conference of Electrical and Electronic Technologies for Automotive (AEIT AUTOMOTIVE), 2019, pp. 1–6. doi:10.23919/EETA.2019.8804497.
- [122] L. Nkenyereye, C. H. Liu, J. Song, Towards secure and privacy preserving collision avoidance system in 5G fog based Internet of Vehicles, *Future Generation Computer Systems* 95 (2019) 488–499. doi:10.1016/j.future.2018.12.031.
- [123] L. Sequeira, A. Szefer, J. Slome, T. Mahmoodi, A Lane Merge Coordination Model for a V2X Scenario, in: European Conference on Networks and Communications (EuCNC), 2019, pp. 198–203. doi:10.1109/EuCNC.2019.8801987.
- [124] G. Avino, P. Bande, P. A. Frangoudis, C. Vitale, C. Casetti, C. F. Chiasserini, K. Gebru, A. Ksentini, G. Zennaro, A MEC-Based Extended Virtual Sensing for Automotive Services, *IEEE Transactions on Network and Service Management* 16 (4) (2019) 1450–1463. doi:10.1109/TNSM.2019.2931878.
- [125] S. Saxena, I. K. Isukapati, Simulated Basic Safety Message: Concept Application, in: IEEE Intelligent Vehicles Symposium (IV), 2019, pp. 2450–2456. doi:10.1109/IVS.2019.8813837.
- [126] F. Giannone, P. A. Frangoudis, A. Ksentini, L. Valcarenghi, Orchestrating heterogeneous MEC-based applications for connected vehicles, *Computer Networks* 180 (2020) 107402. doi:10.1016/j.comnet.2020.107402.
- [127] S. Barmponakis, G. Tsiatsios, M. Papadakis, E. Mitsianis, N. Koursioumpas, N. Alonistioti, Collision avoidance in 5G using MEC and NFV: The vulnerable road user safety use case, *Computer Networks* 172 (2020) 107150. doi:10.1016/j.comnet.2020.107150.

- [128] M. Malinverno, G. Avino, C. Casetti, C. F. Chiasserini, F. Malandrino, S. Scarpina, Edge-Based Collision Avoidance for Vehicles and Vulnerable Users: An Architecture Based on MEC, *IEEE Vehicular Technology Magazine* 15 (1) (2020) 27–35. doi:10.1109/MVT.2019.2953770.
- [129] Y.-Y. Tseng, P.-M. Hsu, J.-J. Chen, Y.-C. Tseng, Computer Vision-Assisted Instant Alerts in 5G, in: 29th International Conference on Computer Communications and Networks (ICCCN), 2020, pp. 1–9. doi:10.1109/ICCCN49398.2020.9209751.
- [130] S. Fu, W. Zhang, Z. Jiang, A network-level connected autonomous driving evaluation platform implementing C-V2X technology, *China Communications* 18 (6) (2021) 77–88. doi:10.23919/JCC.2021.06.007.
- [131] K. Kang, Y. Bichiou, H. A. Rakha, A. Elbery, H. Yang, Development and Testing of a Connected Vehicle Optimal Lane Selection Algorithm, in: *IEEE Intelligent Transportation Systems Conference (ITSC)*, 2019, pp. 1531–1536. doi:10.1109/ITSC.2019.8916979.
- [132] Z. Li, T. Yu, R. Fukatsu, G. K. Tran, K. Sakaguchi, Proof-of-Concept of a SDN Based mmWave V2X Network for Safe Automated Driving, in: *IEEE Global Communications Conference (GLOBECOM)*, 2019, pp. 1–6. doi:10.1109/GLOBECOM38437.2019.9014261.
- [133] L. Ding, Y. Wang, P. Wu, L. Li, J. Zhang, Kinematic Information Aided User-Centric 5G Vehicular Networks in Support of Cooperative Perception for Automated Driving, *IEEE Access* 7 (2019) 40195–40209. doi:10.1109/ACCESS.2019.2901985.
- [134] B. Chang, J. Chiou, Cloud Computing-Based Analyses to Predict Vehicle Driving Shockwave for Active Safe Driving in Intelligent Transportation System, *IEEE Transactions on Intelligent Transportation Systems* 21 (2) (2020) 852–866. doi:10.1109/TITS.2019.2902529.

- [135] R. Aslani, E. Saberinia, M. Rasti, Resource Allocation for Cellular V2X Networks Mode-3 With Underlay Approach in LTE-V Standard, *IEEE Transactions on Vehicular Technology* 69 (8) (2020) 8601–8612. doi:10.1109/TVT.2020.2997853.
- 1770 [136] C. Guo, L. Liang, G. Y. Li, Resource Allocation for High-Reliability Low-Latency Vehicular Communications With Packet Retransmission, *IEEE Transactions on Vehicular Technology* 68 (7) (2019) 6219–6230. doi:10.1109/TVT.2019.2919181.
- 1775 [137] F. A. Schiegg, I. Llatser, D. Bischoff, G. Volk, Collective Perception: A Safety Perspective, *Sensors* 21 (1) (2021). doi:10.3390/s21010159.
- [138] European Telecommunications Standards Institute (ETSI), Intelligent Transport Systems (ITS); Congestion Control Mechanisms for the C-V2X PC5 interface; Access layer part, ETSI TS 103 574 V1.1.1 (November 2018).
- 1780 [139] G. Bansal, J. B. Kenney, C. E. Rohrs, LIMERIC: A Linear Adaptive Message Rate Algorithm for DSRC Congestion Control, *IEEE Transactions on Vehicular Technology* 62 (9) (2013) 4182–4197. doi:10.1109/TVT.2013.2275014.
- 1785 [140] O. Amador, I. Soto, M. Calderón, M. Urueña, Experimental Evaluation of the ETSI DCC Adaptive Approach and Related Algorithms, *IEEE Access* 8 (2020) 49798–49811. doi:10.1109/ACCESS.2020.2980377.
- 1790 [141] European Telecommunications Standards Institute (ETSI), Intelligent Transport Systems (ITS); Vehicular Communications; GeoNetworking; Part 4: Geographical addressing and forwarding for point-to-point and point-to-multipoint communications; Sub-part 1: Media-Independent Functionality, EN 302 636-4-1 V1.4.1 (January 2020).
- [142] 5G Automotive Association (5GAA) Working Group 5, List of C-V2X Devices, Technical report (November 2020).

- URL https://5gaa.org/wp-content/uploads/2020/11/5GAA_List-of-C-V2X-Devices.pdf
- 1795
- [143] R. Riebl, H.-J. Günther, C. Facchi, L. Wolf, Artery: Extending Veins for VANET applications, in: International Conference on Models and Technologies for Intelligent Transportation Systems (MT-ITS), 2015, pp. 450–456. doi:10.1109/MTITS.2015.7223293.
- 1800 [144] F. Hagenauer, F. Dressler, C. Sommer, Poster: A simulator for heterogeneous vehicular networks, in: 2014 IEEE Vehicular Networking Conference (VNC), 2014, pp. 185–186. doi:10.1109/VNC.2014.7013339.
- [145] A. Virdis, G. Stea, G. Nardini, Simulating LTE/LTE-Advanced Networks with SimuLTE, in: M. S. Obaidat, T. Ören, J. Kacprzyk, J. Filipe (Eds.), Simulation and Modeling Methodologies, Technologies and Applications, 1805 Springer International Publishing, Cham, 2015, pp. 83–105.
- [146] B. McCarthy, A. Burbano-Abril, V. R. Licea, A. O’Driscoll, OpenCV2X: Modelling of the V2X Cellular Sidelink and Performance Evaluation for Aperiodic Traffic (2021). arXiv:2103.13212.
- 1810 [147] A. Hegde, A. Festag, Artery-C: An OMNeT++ Based Discrete Event Simulation Framework for Cellular V2X, in: Proceedings of the 23rd International ACM Conference on Modeling, Analysis and Simulation of Wireless and Mobile Systems, MSWiM ’20, Association for Computing Machinery, New York, NY, USA, 2020, p. 47–51. doi:10.1145/3416010.3423240.
- 1815 [148] F. Eckermann, M. Kahlert, C. Wietfeld, Performance Analysis of C-V2X Mode 4 Communication Introducing an Open-Source C-V2X Simulator, in: 2019 IEEE 90th Vehicular Technology Conference (VTC-Fall), Honolulu, Hawaii, USA, 2019.
- 1820 [149] G. Cecchini, A. Bazzi, B. M. Masini, A. Zanella, LTEV2Vsim: An LTE-V2V simulator for the investigation of resource allocation for cooperative awareness, in: 2017 5th IEEE International Conference on Models and

Technologies for Intelligent Transportation Systems (MT-ITS), 2017, pp. 80–85. doi:10.1109/MTITS.2017.8005625.

- 1825 [150] K. Zheng, Q. Zheng, P. Chatzimisios, W. Xiang, Y. Zhou, Heterogeneous Vehicular Networking: A Survey on Architecture, Challenges, and Solutions, *IEEE Communications Surveys & Tutorials* 17 (4) (2015) 2377–2396. doi:10.1109/COMST.2015.2440103.
- [151] K. Abboud, H. A. Omar, W. Zhuang, Interworking of DSRC and Cellular Network Technologies for V2X Communications: A Survey, *IEEE Transactions on Vehicular Technology* 65 (12) (2016) 9457–9470. doi:10.1109/TVT.2016.2591558. 1830
- [152] S. Ucar, S. C. Ergen, O. Ozkasap, Multihop-Cluster-Based IEEE 802.11p and LTE Hybrid Architecture for VANET Safety Message Dissemination, *IEEE Transactions on Vehicular Technology* 65 (4) (2016) 2621–2636. doi:10.1109/TVT.2015.2421277. 1835
- [153] W. Qi, B. Landfeldt, Q. Song, L. Guo, A. Jamalipour, Traffic Differentiated Clustering Routing in DSRC and C-V2X Hybrid Vehicular Networks, *IEEE Transactions on Vehicular Technology* 69 (7) (2020) 7723–7734. doi:10.1109/TVT.2020.2990174.
- 1840 [154] Z. H. Mir, J. Toutouh, F. Filali, Y.-B. Ko, Enabling DSRC and C-V2X Integrated Hybrid Vehicular Networks: Architecture and Protocol, *IEEE Access* 8 (2020) 180909–180927. doi:10.1109/ACCESS.2020.3027074.
- [155] R. Jacob, M. Gay, M. Dod, S. Lorenz, A. Jungmann, L. Franke, M. Philipp, M. Kloeppe-Gersdorf, M. Haberjahn, E. Gruschka, G. Fettweis, IVS-KOM: A Reference Platform for Heterogeneous ITS Communications, in: 2020 IEEE 92nd Vehicular Technology Conference (VTC2020-Fall), 2020, pp. 1–7. doi:10.1109/VTC2020-Fall149728.2020.9348580. 1845
- [156] P. Roux, V. Mannoni, Performance evaluation for co-channel coexistence between ITS-G5 and LTE-V2X, in: 2020 IEEE 92nd Vehicular Technol-

1850 ogy Conference (VTC2020-Fall), 2020, pp. 1–5. doi:10.1109/VTC2020-
Fall149728.2020.9348517.

[157] M. Usman, M. Qaraqe, M. R. Asghar, A. A. Gebremariam, I. S. Ansari,
F. Granelli, Q. H. Abbasi, A Business and Legislative Perspective of V2X
and Mobility Applications in 5G Networks, IEEE Access 8 (2020) 67426–
1855 67435. doi:10.1109/ACCESS.2020.2986129.