

EXCHANGE OF MESSAGES IN THE TELECOMMUNICATION NETWORK WITH DIFFERENT TYPES OF COMMUNICATION CHANNELS

Umarov Ulugbek Agzamovich

*Department of Television and Radio Broadcasting
Systems Tashkent University of Information Technologies
named after Muhammad al-Khwarizmi,
Tashkent, Uzbekistan
umarov_u.a@inbox.ru*

Nigmatov Hikmatulla

*Department of Modern Information Technologies
International Islamic Academy of Uzbekistan,
Tashkent, Uzbekistan
khikmatulla@mail.ru*

Abstract. The article deals with the problems of determining the main quality indicators of a telecommunications network with different types of communication channels and the time-varying structure of their functioning to ensure the specified reliability, reliability and time of delivery of protected messages to information consumers. The main method of solving this problem is using analytical and simulation methods on personal computers.

Keywords: telecommunication networks, communication channels, message, mathematical model, algorithms for simulation.

I. INTRODUCTION

In the world, there is currently an intensive development and implementation of reliable and secure information and communication technologies for data exchange between various consumers of information, especially with the rapid development of high-speed mobile communication systems of various cellular companies. The construction of such systems, as a rule, is based on the use of the existing both wired and wireless telecommunication networks for organizing data exchange between different subscribers of a heterogeneous network.

The creation of scientific foundations for the study and construction of secure protected telecommunication networks is impossible without the development and use of models for the functioning of networks with sufficient adequacy reflecting the basic structural and functional relationships of network systems.

There are a large number of works devoted to the definition of various characteristics of telecommunication networks. These works are mainly focused on the study of a network with wired communication channels [1-6].

A specific feature of the construction of modern integrated information and communication technologies (ICT) is the diversity of the channels used and the dynamism (variability) of the network structure, i.e. this applies to telecommunication networks with different types of communication channels and changing structure. This refers to the use of wired, fiber-optic, and wireless mobile cellular radio communication channels [7, 8].

An additional feature of such systems is the need to take into account the priorities of messages according to their importance and urgency, as well as the modes of transmission and reception, which can be very different.

To determine the main qualitative characteristics of communication networks with wired and wireless communication channels with a changing structure and to identify the effectiveness of their functioning, analytical methods and methods of statistical (simulation) modeling on personal computers (PCs) can be used as research tools. As it was said under the changing structure, we mean mobile (in particular, cellular) or satellite communications, although the base stations are stationary, but the subscribers can be in motion, which leads to a change in the structure of the network at a given time.

The efficiency of functioning of secure information and communication technologies (ICT) with a changing structure depends not only on the quality indicators of the components, but also on the control algorithms and adaptation of individual network components to the existing operational situation. Therefore, the development of methods and adaptive control algorithms for data transmission networks with a changing structure is important in scientific and practical terms [9, 10].

As you know, data exchange in modern information and communication technology is carried out on the basis of a conventional telecommunication telephone and wireless mobile (cellular) communication network [11-18].

II. RESEARCH METHOD

Basically, the solution of the problems of analysis and synthesis of various telecommunication networks is reduced to the tasks of assessing probability-time characteristics (PTC).

To evaluate the PTC network with heterogeneous channels, a combined use of analytical and static models is proposed. At the same time, the choice of method and models for assessing PTC is determined by the characteristics and parameters of message flows transmitted over the network, as well as various laws of message service.

The study of the structure and laws of distribution of message flows is a prerequisite for assessing probabilistic and

temporal characteristics (PTC) and solving the problems of analysis and synthesis of networks with different types of channels and a varying structure.

Messages of each priority are characterized by:

- the nature of the flow, determined by the distribution function (DF) and the density function (DF') of the lengths of the intervals between

messages - $F(\tau), f(\tau)$;

- intensity or flow parameter - λ

- DF and DF' capacitance message

lengths - $F(l), f(l)$,

- message parameters (average message length, sometimes length dispersion) –

$$\bar{l}, D^2(l)$$

In some cases, it is necessary to know the magnitude of the load of various priorities, the characteristics of unevenness, etc. The choice of the method for estimating PTC is determined mainly by the probabilistic characteristics and structure of message flows, transmission methods and message processing algorithms, structure of transmission paths, etc.

One of the most effective methods for improving the quality of the functioning of telecommunication networks and systems is the organization of priority message service, which consists in providing advantages to messages with a higher priority or messages with large cost losses from delivery delays. It is quite natural to expect that: if during the transmission process we give preference to service for rapidly aging messages, then the overall flow of timely delivered messages will increase, if we give preference to the most valuable messages, the total value of the delivered messages will increase or the total information delay time will decrease.

As an example, consider the two simplest comparing densities distribution of message value $f(C_0)$.

The law of uniform density:

$$f(C_0) = \begin{cases} \frac{1}{C_{max}} & 0 \leq C_0 \leq C_{max} \\ 0 & C_0 < 0, C_0 > C_{max} \end{cases} \quad (1)$$

In this case

$$L_k = \frac{C_{k-1} - C_k}{C_{max}} - b_{k-1} - b_k \quad (2)$$

where $b_k = \frac{C_k}{C_{max}}, k = \overline{1, n}$

In accordance with

$$L_k M_k(C_0) = \int_{C_k}^{C_{k-1}} C_0 f(C_0) d(C_0) = \frac{1}{C_{max}} \int_{C_k}^{C_{k-1}} C dC =$$

$$= \frac{C_{k-1}^2 - C_k^2}{2C_{max}} = \frac{C_{max}}{2} (b_{k-1}^2 - b_k^2); \quad (3)$$

$$M(C) = \frac{C_{max}}{2} \sum_{k=1}^n Q_k (b_{k-1}^2 - b_k^2); \quad (4)$$

where given

$$Q_k = \frac{1 - \rho(1 - b_k)}{\delta \{1 + [\delta + \rho(1 - b_k)(1 - \prod_{k-1}(\delta))]\}^{-1} \rho(b_{k-1} - b_k)}; \quad (5)$$

With a uniform distribution law,

$$W_E = \sum_{k=1}^n \frac{1 - \rho(1 - b_k)(b_{k-1}^2 - b_k^2)}{\delta \{1 + [\delta + \rho(1 - b_k)(1 - \prod_{k-1}(\delta))]\}^{-1} \rho(b_{k-1} - b_k)} \quad (6)$$

Obviously, the maximum is reached at some values W , which do not depend on the absolute value of W_E . Therefore, with a uniform law of distribution of message values, for any given number of n priorities, it is possible to determine the optimal values of b_k , that provide a maximum of W_E .

III. RESEARCH RESULTS

Let's analyze the obtained results and characteristics. In fig. 1 shows the dependences of the average message delivery time in the system on the message arrival rate λ for the service parameter values $\mu = 60$ and $\mu = 20$ messages/hour (see Table 2). As can be seen from the graph, at $\mu = 60$ s/h, the average message delivery time in the system increases linearly with increasing intensity λ .

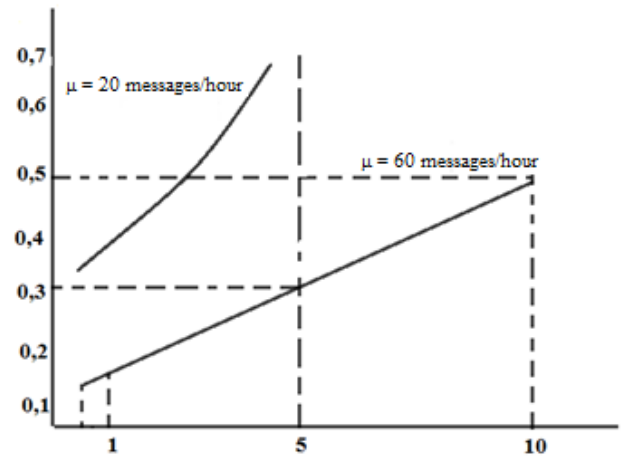


Fig. 1. Dependence of the average delivery time of the message on the intensity of receipt

With a decrease in the service parameter, i.e. at $\mu = 20$ m/h, the increase in the average time of delivering requests in the system increases rather sharply with an increase in λ at values starting at $\lambda = 2$ m/h.

The experimental calculation results are shown in Tables I and II.

TABLE I. The experimental calculation results

No.	λ	μ	Poisson exponent	Poisson uniform	Uniform exhibitor	Exhibitor uniform
1	0,5	20	0,317	0,221	0,339	0,219
		60	0,193	0,191	0,191	0,165
2	1	20	0,361	0,230	0,364	0,229
		60	0,197	0,166	0,198	0,165
3	5	20	3,491	0,383	-	0,803
		60	0,262	0,174	0,325	0,178
4	10	20	-	1,554	-	51,0
		60	0,417	0,220	15,149	0,227

TABLE II. The experimental calculation c results λ m/h

t_g (hour)	0,1	0,16	0,26	0,30	0,36
λ m/h (messages/hour)	-	0,36	0,88	0,94	0,97
$\lambda = 1$	0	0,309	0,88	0,93	0,97
$\lambda = 5$	0	0,202	0,66	0,75	0,82
$\lambda = 10$	0	0,104	0,41	0,46	0,53

Also obtained are histograms of the distribution of the message delivery time at $\lambda = 0.5$ m/h and $\mu = 20$ m/h; $\lambda=5$; 10 m/h at $\mu= 60$ m/h.

Verification of the experimental distribution according to the criterion of goodness χ^2 at $\lambda = 5$ m/h and $\mu = 20$ m/h showed that the distribution has the character of a uniform law, which can be assumed for the case $\lambda = 5$; 10 m/h, $\mu = 60$ m/h.

The presented simulation results show that using the developed statistical model, various probabilistic - temporal characteristics and parameters of a telecommunication network with wired and wireless communication channels of a given structure can be obtained. Comparison of the obtained simulation results with the results of analytical models showed their good agreement.

The histograms of the distribution of the delivery time of requests in the system at different rates of arrival $\lambda = 0.5$ were obtained; 5; 10 messages/hour, and at $\mu = 60$ m/h. It was revealed that the distribution law of the time for bringing the requirements in the system has an exponential character.

When using analytical models, in each case there are limitations imposed on the nature of the flow and service, the number of phases, service disciplines, priority system, etc.

When studying a telecommunication network in conditions close to real ones, the method of simulation modeling on personal computers can be used to assess the main qualitative characteristics of the network. The ultimate goal of studying the principles of construction and modes of operation of multilink priority data exchange systems is to determine the main indicators of the quality of functioning of a multi-level hierarchical network with different types of communication channels.

Conducting an analytical study presupposes the presence of a sufficiently complete and accurate analytical description of the system as a whole, the creation of which is mostly difficult due to the complexity of the processes occurring in networks with different types of channels.

Therefore, the use of only analytical methods turns out to be possible only with significant simplifications, which, as a rule, leads to obtaining probabilistic characteristics of some simplified network model.

Computer simulation is a general method without any theoretical limitations. Modeling the messaging process in a communication network with different types of channels and a given structure has a number of specific features, the main ones of which are as follows:

1) To model a network (more precisely, the processes occurring in it), it is required to develop software generators or their corresponding algorithms. Programs of this type are not only associated with a specific type of simulation system

(in this case, a network), each such program is based on a specific mathematical model. Of course, this narrows the scope of their application, however, the presence of a general methodological concept successfully incorporated into the complex of programs can significantly reduce the labor intensity and time consumption at the initial stages of programming.

2) An important problem in the algorithmic and software development of a network with wired and wireless communication channels is the overall complexity of the entire simulated system. In this regard, the expediency of dividing (decomposing) the general model into private sub-models and the transition from them to common.

3) Having the possibility of direct application of the existing assortment of programs, you cannot do without creating your own programs that complement standard software tools. In the most favorable case, you can limit yourself to the modification of standard programs, coordinating them with the specific conditions of use and needs. The use of existing programs depends on their adaptability.

For modeling a complex multi-level radial-nodal network with a time-varying structure and different types of communication channels in order to determine its main qualitative characteristics of functioning, it is convenient to start with considering the general structure in the form of substructures of various configurations.

Determining the required estimates of the functioning of the structure under consideration is reduced to calculating the characteristics of a multiphase queuing system.

IV. CONCLUSION

In this article, the tasks of determining the main quality indicators of a telecommunication network with different types of communication channels and the time-varying structure of their functioning were considered to ensure the specified reliability, reliability and time of bringing protected messages to information consumers. The main method for solving this problem was used analytical and simulation methods on personal computers.

The developed algorithms for simulation of the process of transmitting messages in various transmission modes allow to obtain the following characteristics:

- the dependence of the average time of message delivery t_g to the system on the intensity of the arrival of λ at fixed values of μ and the laws of distribution of the service parameter for different laws of receipt of messages;
- the dependence of the average waiting time for messages to the communication center (CC) on the intensity of message arrival λ for fixed values of μ and given laws of service and receipt of messages;
- distribution of time for message delivery in the system;
- distribution of waiting times for messages in the communication center;
- the probability of timely delivery of messages $P_g(t \leq t_g)$;
- the dependence of the probability of timely delivery of messages P_g from the allowable time (delay) for bringing applications in the system (t_g);
- quantitative indicators of served and not served messages in each node of the telecommunication network;

- the number of retransmissions;
- the number of messages that reached the consumer information during the first transmission and one, 2, 3 or more retransmissions;
- distribution of the memory capacity of network nodes, recipients of information, and others.

The obtained simulation results show that, using the developed statistical model, various probabilistic-temporal characteristics and parameters of the telecommunication network of a given structure can be obtained. Comparison of our simulation results with the results of analytical models showed their good agreement.

REFERENCES

- [1] Kh. Nigmatov and U. Umarov, (2021) "Analytical simulation methods determining the basic characteristics of a telecommunication network with different communication channels and a changing structure," *Bulletin of TUIT: Management and Communication Technologies*: Vol. 4 , Article 3. Available at: <https://uzjournals.edu.uz/tuitmct/vol4/iss3/3>
- [2] Kh. Nigmatov and U. Umarov, "Vibor kriteriya effektivnosti pri zashite informatsii v setyax telekommunikatsii". *Materiali XXIII mejdunarodnoy nauchno-texnicheskoy konferensii* 18–19 oktablya 2018 goda g.Minsk, Respublika Belarus.
- [3] Kh. Nigmatov, "To a technique of maintenance of information safety in networks and systems of telecommunication." *Tretya Mejdunarodnaya sentralno-Aziatskaya konferensiya*. Na angl.yazike ICI-2007 i ITRA-2007 g.Pariz.
- [4] Kh. Nigmatov and U. Umarov, "Opredelenie osnovnykh karakteristik telekommunikatsionnoy seti s raznotipnymi kanalami svyazi i izmenyayusheesya strukturoy." *Muhammad al-Xorazmiy avlodlari*. 2(12)/2020. 78-82. (2020).
- [5] M.S. Rahman, A.E. Nicholson, and G. Haffari, "Inferring Two-Level Hierarchical Gaussian Graphical Models to Discover Shared and Context-Specific Conditional Dependencies from High-Dimensional Heterogeneous Data." *SN COMPUT. SCI.* 1, 218 (2020). <https://doi.org/10.1007/s42979-020-00224-w>
- [6] J. Fang, M. Wang, Z. Wei. "A memory scheduling strategy for eliminating memory access interference in heterogeneous system". *J Supercomput* 76, 3129–3154 (2020). <https://doi.org/10.1007/s11227-019-03135-7>
- [7] B. Horling, V.Lesser, "Analyzing, modeling and predicting organizational effects in a distributed sensor network". *J Braz Comp Soc* 11, 9–26 (2005). <https://doi.org/10.1007/BF03192368>
- [8] I. Castellani, M. Dezani-Ciancaglini, J.A. Pérez, "Self-adaptation and secure information flow in multiparty communications". *Form Asp Comp* 28, 669–696 (2016). <https://doi.org/10.1007/s00165-016-0381-3>
- [9] Y. Huang, J. Tan, Y. Liang, "Wireless big data: transforming heterogeneous networks to smart networks". *J. Commun. Inf. Neww.* 2, 19–32 (2017). <https://doi.org/10.1007/s41650-017-0002-1>
- [10] H.Wu, X. Li, Y. Deng, "Deep learning-driven wireless communication for edge-cloud computing: opportunities and challenges". *J Cloud Comp* 9, 21 (2020). <https://doi.org/10.1186/s13677-020-00168-9>
- [11] T.W.Silva, D.C. Morais, H.G. Andrade, et al. "Environment for integration of distributed heterogeneous computing systems". *J Internet Serv Appl* 9, 4 (2018). <https://doi.org/10.1186/s13174-017-0072-1>.
- [12] G. Sahu, S.S. Pawar, "An Approach to Reduce Interference Using FFR in Heterogeneous Network". *SN COMPUT. SCI.* 1, 100 (2020). <https://doi.org/10.1007/s42979-020-0092-y>
- [13] L. Qian, J. Zhu, S. Zhang, "Survey of wireless big data". *J. Commun. Inf. Neww.* 2, 1–18 (2017). <https://doi.org/10.1007/s41650-017-0001-2>
- [14] K. Nosirov, S. Begmatov and M. Arabboev, "Display Integrated Mobile Phone Prototype For Blind People," *International Conference on Information Science and Communications Technologies (ICISCT)*, 2019, pp. 1-4, doi: 10.1109/ICISCT47635.2019.9011919.
- [15] M. M. Arabboev and S. A. Begmatov, "Prototype of special mobile phone for people with disabilities," in *Proceedings of First International Conference of "Umid" Foundation alumni on the theme "New Generation of Personnel for Modernizing Uzbekistan*, 2020, pp. 36–39.
- [16] K. Nosirov, S. Begmatov, M. Arabboev and K. Medetova, "Design of

- a Model For Disinfection Robot System," *International Conference on Information Science and Communications Technologies (ICISCT)*, 2020, pp. 1-4, doi: 10.1109/ICISCT50599.2020.9351370.
- [17] K. Nosirov, S. Begmatov and M. Arabboev, "Analog Sensing and Leap Motion Integrated Remote Controller for Search and Rescue Robot System," *International Conference on Information Science and Communications Technologies (ICISCT)*, 2020, pp. 1-5, doi: 10.1109/ICISCT50599.2020.9351425.
- [18] K. Nosirov, S. Begmatov and M. Arabboev, "Design Of A Model For Multi-Parametric Health Monitoring System," *International Conference on Information Science and Communications Technologies (ICISCT)*, 2020, pp. 1-5, doi: 10.1109/ICISCT50599.2020.9351522.