

See discussions, stats, and author profiles for this publication at: <https://www.researchgate.net/publication/278405899>

# The Performance of Helical Pile Groups Under Compressive Loads: A Numerical Investigation

Conference Paper · January 2013

CITATIONS

5

READS

527

2 authors:



[M. Hesahm El Naggar](#)

The University of Western Ontario professor and Associate Dean

357 PUBLICATIONS 4,563 CITATIONS

[SEE PROFILE](#)



[Zeyad Elsherbiny](#)

WOOD Place

4 PUBLICATIONS 39 CITATIONS

[SEE PROFILE](#)

Some of the authors of this publication are also working on these related projects:



Full-scale Testing of Helical Piles: Single Piles and a Group of Piles [View project](#)



Geo-Structural Nonlinear Analysis Program (GSNAP) [View project](#)

# The Performance of Helical Pile Groups Under Compressive Loads: A Numerical Investigation

## Performance d'un groupe de piles hélicoïdales sous chargement axial : une étude numérique

Elsherbiny Z.

*Natural Resources, AMEC Americas Ltd., Calgary, Canada*

El Naggar M.H.

*Department of Civil and Environmental Engineering, University of Western Ontario, London, ON, Canada*

**ABSTRACT:** An extensive finite element analysis (FEA) study on helical piles is conducted to evaluate the performance of helical pile groups subjected to axial compressive loads. Three-dimensional nonlinear analysis is conducted using the FE program ABAQUS. The Mohr-Coulomb plasticity model is used to represent the mechanical behaviour of soil. The numerical models are calibrated and verified using: full-scale load testing data of single piles; representative soil properties obtained from the borehole logs; and realistic modeling assumptions. A parametric study is then conducted on a wide range of varying parameters including: soil types (dry sand and saturated clay); and pile spatial parameters (inter-helix spacing and pile spacing). The numerical results are compared to available methods in the literature for conventional piles and design recommendations are provided.

**RÉSUMÉ :** Une étude numérique par éléments finis (MEF) sur des piles hélicoïdales est entreprise pour évaluer la performance d'un groupe de piles soumis à des charges de compression. Une analyse tridimensionnelle, non linéaire, est conduite en utilisant le code ABAQUS et le modèle de plasticité de Mohr-Coulomb est utilisé pour représenter le comportement mécanique du sol. Les modélisations numériques sont calibrées sur des essais complets sur simple pile avec les caractéristiques du sol obtenu sur des carottes en laboratoire et avec des hypothèses réalistes. Une étude paramétrique est alors entreprise sur un large éventail de paramètres comprenant: les types de sol (sable sec et argile saturé) et des paramètres géométriques (espacement inter-hélice et espacement des piles). Les résultats numériques obtenus sont comparés aux résultats issus de la littérature pour des piles conventionnelles et des recommandations de conception sont fournies.

**KEYWORDS:** helical pile, numerical modeling, group effect, interaction factor, settlement ratio, displacement ratio, efficiency factor

## 1 INTRODUCTION

Helical piles represent an efficient deep foundation system used in a wide range applications varying from anchors for transmission towers to foundations for bridges and large industrial installations. Helical piles are made of a steel shaft; either a solid square shaft or circular pipe, with one or multiple helices attached to it. They are installed by employing rotational force applied through a drive head. The piles could be installed to any depth and at any angle provided that the soil conditions are tolerable and the pile is designed to withstand the applied torque from a suitable drive head.

The current design methods of single helical piles are based on the same framework and theories of conventional piles, where the compressive capacity of the pile is provided by a combination of shaft resistance and bearing resistance on the helices (Mitsch and Clemence, 1985; Narasimha Rao, et. al, 1991; Zhang, 1999; and Livneh and El Naggar, 2008).

Pile foundations typically involve a group of piles connected by a common pile cap. A concrete cap is normally used to connect the pile heads in the group. Structural loads are applied to the cap, which in turn transfers them to the piles. The pile group behaviour is strongly affected by the soil type and the spacing between piles. However, currently there is no published research work on the compressive capacity and performance of helical pile groups which lead the designers to use methods available for conventional piles (i.e. bored piles and driven piles) to design helical pile groups.

The load transfer mechanism of helical piles is more complex than for conventional piles. The lack of particular guidance for helical piles motivated the present research work herein, with special emphasis on the group performance of helical piles and to provide design methods that are tailored for helical pile groups. This paper examines the effects of: inter-helix spacing; soil type; and pile spacing on the performance of helical pile groups.

### 1.1 Review of Pile group Behaviour

Piles in a group are expected to interact as the stress zones around the piles overlap. This interaction is strong for small pile spacing and diminishes as the pile spacing increases. The overlapped stress zones underneath the cap could affect the average capacity or average settlement of piles in the group compared to single piles subjected to average group load.

It is convenient to characterize the group effect on the performance of pile groups through the settlement ratio,  $R_s$ , as follows:

$$R_s = \frac{\text{Settlement of the group } (S_g)}{\text{settlement of single pile } (S_p)} \geq 1.0 \quad (1)$$

A practical approximation of the settlement ratio was derived by Randolph (Rowe, 2001):

$$R_s \cong n^w \quad (2)$$

where  $n$  is the number of piles in the group; and  $w$  is a factor depending on pile spacing, pile geometry, relative pile/soil stiffness, and the variation of soil modulus with depth. Typically,  $w = 0.5$  for friction piles in clay and 0.33 for friction piles in sand spaced at 3 x pile diameters center to center.

Poulos and Davis (1980) proposed using the interaction factors,  $\alpha_v$ , to represent the effect of a pile on a neighboring pile. In general, the interaction factor is a function of the relative pile/soil stiffness, pile length, pile diameter, center to center pile spacing, and the soil elastic modulus along the pile length and at its base (Poulos, 1988).

The settlement ratio can then be evaluated using the interaction approach as follows:

$$R_s = \alpha_{11} + \sum_{j=2}^n \alpha_{1j} \geq 1.0 \quad (3)$$

where  $n$  is the number of piles in the group; the interaction factor between reference pile and itself,  $\alpha_{11} = 1$ ; and  $\alpha_{1j}$  is the

interaction factor between reference pile 1 and pile  $j$  and  $j = 2, \dots, n$ .

## 2 FULL-SCALE TESTING

The field testing program consisted of performing five compression load tests on four non-instrumented piles of different sizes at two sites: site (A) is composed primarily of sand; and site (B) is mainly clayey soil. Two axial compressive load tests were conducted at Site (A) and three axial compression load tests were conducted at site (B). The piles installed at site (A) had single helix, while those installed at site (B) had double and triple helices. The load tests conformed to procedure A of ASTM D1143 for axial compression testing.

The subsurface soil condition at site (A) included a top 0.3m of an organic soil material followed by a thin brown clay layer that extends 0.5m and consists of silt and sand, and traces of gravel. Underlying the clay layer is a sand layer that extends to 9m below ground surface. The sand ranged from fine grained at the top to coarse grained with increasing depth. The Standard Penetration Test (SPT) blow count number indicated loose to medium dense sand conditions with depth. The natural moisture content was averaged at 20% along depth. The groundwater table was not observed at the time of drilling and the piles were installed and tested during the month of October.

The subsurface soil profile established from the boreholes at site (B) comprises a surficial fill layer of sand and gravel mixed with some organics and extends to 1.5m with an SPT number ranging between 5 and 6. Underlying the surficial layer is medium to stiff brown silt and sand that extends to depths between 2.3m to 4.6m below ground surface with an SPT number varying between 3 and 12. Further deep is a silty clay layer that extends to depths 6.1m and 7.6m below ground surface. The silty clay layer gets softer with increasing depth and the SPT number ranged from 6 to 0. The ground water table was encountered 1.0 m below the ground surface.

The tested piles geometrical properties were representative of typical helical piles geometry in projects that involve light to medium loading conditions and are summarized in Tables 1 and 2 for site (A) and site (B), respectively.

The test results were used exclusively to calibrate and verify the numerical models that were then used to perform the parametric study.

Table 1. Summary of tested piles configurations at site (A)

| Test Pile | Depth (m) | Shaft Diameter (mm) | Helix Diameter (mm) |
|-----------|-----------|---------------------|---------------------|
| PA-1      | 5.5       | 273                 | 610                 |
| PA-3      | 5.6       | 219                 | 508                 |

Table 2. Summary of tested piles configurations at site (B)

| Test Pile | Depth (m) | Shaft Diameter (mm) | Helix Diameter (mm) |
|-----------|-----------|---------------------|---------------------|
| PB-1      | 7.2       | 178                 | 610x610x610         |
| PB-2      | 7.2       | 178                 | 610x610x610         |
| PB-4      | 3.2       | 114                 | 406x406             |

## 3 NUMERICAL MODELING

A finite element model is developed using the program ABAQUS (SIMULIA, 2009) to simulate the experimental program. The soil continuum is modeled considering a 3D cylindrical configuration and the pile is placed along the axial z-

direction of the cylinder. The helix is idealized as a planar cylindrical disk so that modeling of the pile and the surrounding soil can take advantage of the axisymmetric conditions as shown in Figure 1.

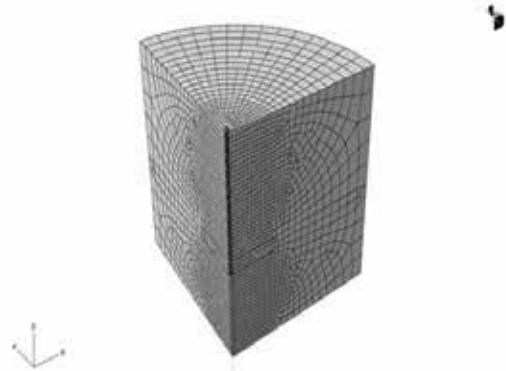


Figure 1. Numerical model geometry for a single pile subjected to axial load.

### 3.1 Model description

The 3-dimensional soil medium is discretized into 8-noded, first order, and reduced integration continuum solid elements (C3D8R). The element has three active translational degrees of freedom at each node and consists of one integration point located at the centroid. The pile is simulated using four-nodes, first order, reduced integration, general-purpose shell elements (S4R).

The boundaries are located such that there is minimal effect on the results. The radius of the soil column extends approximately 33 shaft diameters from the center of the pile shaft. The depth of soil deposits below the lower helix is a minimum of 6.5 helix diameters. The top soil surface is considered as stress-free boundary. The boundary conditions exploited symmetry to reduce the model size. The bottom of the soil cylinder is pinned. The back of the cylinder is constrained in the horizontal plane and is free to move vertically.

The soil is modeled as an isotropic elastic-perfectly plastic continuum with failure described by the Mohr-Coulomb yield criterion. The elastic behavior was defined by Poisson's ratio,  $\nu$ , and Young's modulus,  $E$ . The plastic behavior is defined by the residual angle of internal friction,  $\phi_r$ , and the dilation angle,  $\psi$ , and material hardening is defined by the cohesion yield stress,  $c$ , and absolute plastic strain,  $\epsilon_{pl}$ .

The pile-soil interface is modeled using the Tangential Behavior Penalty-type Coulomb's frictional model. The soil unit weight is accounted for in the numerical model as an initial stress through the geostatic equilibrium step.

### 3.2 Calibration and verification

Using some of the test results, the above model properties and configurations, and representative soil properties obtained from the boreholes and the literature, the numerical models are calibrated satisfactorily considering the soil conditions and load test results of piles PA-1 and, PB-1 and PB-2 as shown in Figures 2 and 3. The soil properties used in the analysis are assumed to be the disturbed properties due to pile installation.

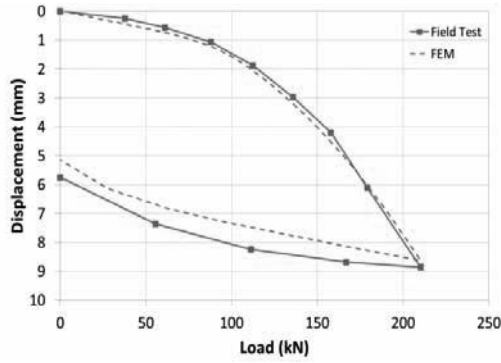


Figure 2. Calibrated numerical model compared to field test of PA-1

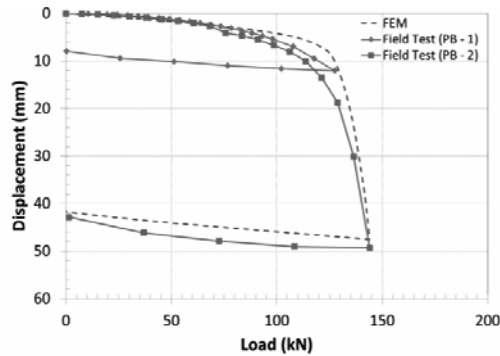


Figure 3. Calibrated numerical model of piles PB-1 and PB-2

In order to verify the ability of the calibrated models to accurately depict the behavior of helical piles under compressive and lateral loading, the calibrated models were utilized (considering the same soil properties and boundary and interface conditions) to analyze the remaining load test data and the results showed satisfactory agreement with actual test results of piles PA-3, and PB-4 as shown in Figures 4(a), and 4(b).

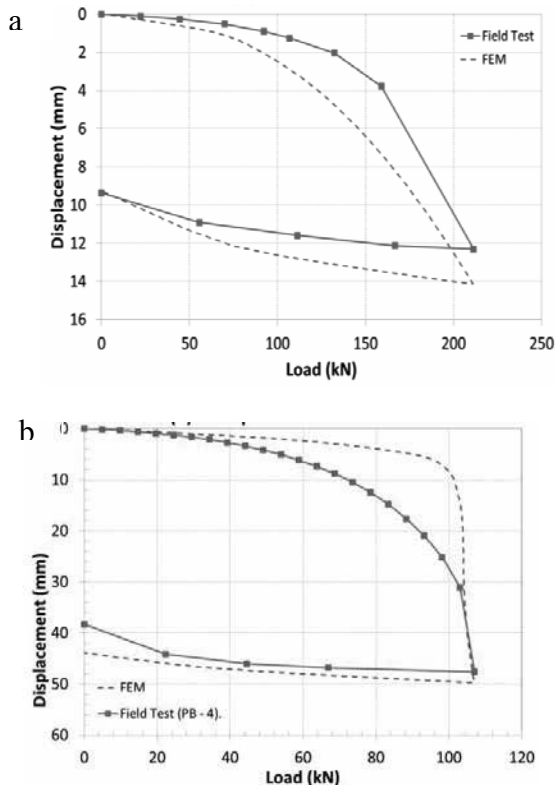


Figure 4. Verified numerical models: a) Pile PA-3; b) Pile PB-4.

Using the same soil properties that are established from the calibration of model considering pile PA-1 test data, the calculated response of neighbouring pile PA-3 is softer than the field test results as shown in Figure 4(a), but the calculated response of pile PB-4 is stiffer than the load test data. This is expected due to the natural spatial variability of soil properties.

### 3.3 Parametric study

Using the previously calibrated and validated models, a numerical parametric study is conducted considering different practical pile configurations and common soil types. The piles considered consist of a 273mm diameter steel pipe that has two 610mm helices attached to it. The inter-helix spacing ratio,  $S_p$ , ranges between 1 and 3 helix diameters (i.e.  $1D$ ,  $2D$ , and  $3D$ ) with a pile embedment depth of 6 m. The piles are modeled as single, two, and four piles in a square arrangement with a center to center spacing,  $S_p$ , ranging between  $2D$  to  $10D$ .

The pile is modeled as elastic steel with  $E = 200\text{GPa}$  and  $\nu = 0.3$ . For piles in sand, the sand is modeled as homogeneous with  $\phi_r = 30^\circ$  and  $\psi = 0^\circ$  to represent loose to medium dense sand. The yield cohesion,  $c$ , is 0 kPa to represent purely frictional sand. The sand is assumed to have a bulk unit weight of  $20\text{ kN/m}^3$  and an initial coefficient of lateral earth pressure,  $K_o$ , equal 0.5. Moreover, the pile-soil interface friction angle,  $\delta$ , is assumed to be  $0.67\phi_r$ , which yields a friction factor of 0.38. Finally, the modulus of elasticity of the soil is assumed to be  $100\text{MPa}$  and the soil Poisson's ratio,  $\nu = 0.3$ .

For piles in clay, it is assumed that the helices are embedded into a very stiff clay layer with undrained shear strength,  $c_u = 100\text{kPa}$  and  $E = 50\text{MPa}$ , while the soil above top helix (i.e. along the shaft) is soft clay with  $c_u = 25\text{kPa}$  and  $E = 30\text{MPa}$ . The clay is modeled assuming the water level is at the ground surface, and the loading rate is assumed fast enough to invoke undrained conditions. Therefore, Poisson's ratio = 0.49 was considered in the analysis. The adhesion,  $c_a$ , between the pile and the soil is estimated from CFEM (2006): for  $c_u = 25\text{ kPa}$ ,  $c_a = 25\text{ kPa}$ . A friction factor of 1.0 is used indicating that the frictional stresses along the shaft are equal to the contact pressure. However, to account for the adhesion strength, a shear stress limit along the interface is defined at which slippage occurs. This shear stress limit along the interface is  $c_a$ .

## 4 RESULTS AND DISCUSSION

For load-settlement curves with no visually distinctive failure point, as for the case of piles in sand, the failure loads are obtained at a practical settlement level equal to  $5\%D$  (i.e.  $30\text{mm}$ ). The pile settlement is obtained at a service load equal to the failure load divided by a factor of safety,  $FS$ , equal to 3.

For a 4-pile group in sand,  $R_s$  could be as high as 1.3 at  $S_p = 2D$  and as low as 1.1 at  $S_p = 5D$ .  $R_s$  is the greatest at  $S_p = 2D$  and decreases gradually with increasing  $S_p$  as shown in Figure 5. It is also found that  $S_r$  has a negligible effect on  $R_s$ . Moreover,  $R_s$  at service load considering  $FS = 2$  is larger than  $R_s$  for service loads given by  $FS = 4$ , as shown in Figure 6. It is also found that  $R_s$  for a group of piles is not necessarily an algebraic summation of the interaction factors,  $\alpha_{ij}$ , of the piles in the group. The existence of other piles in a group (other than the two under consideration) stiffens the soil. Therefore, the interaction factors would decrease relative to the case of a 2-pile group. Basile (1999) made similar observations and concluded that the interaction factors approach may lead to overestimation of pile response. Furthermore, Randolph (1994) stated that the interaction factors should only be applied to the elastic component of settlement since the plastic component of settlement is largely due to localized failure close to the pile and is not transferred to neighboring piles.

It is also found that the empirical equation suggested by Randolph (Equation 1) overpredicts the settlement ratio for four-pile groups by 22% for  $S_p = 2D$  and by 45% for  $S_p$  greater than  $3D$ . In addition, using the equation proposed by Randolph and Poulos (1982) to obtain the interaction factor,  $\alpha_v$ , for helical piles assuming straight shaft with diameter  $D$  for  $S_p = 2D$  yields largely overestimated interaction effect. On the other hand, using a straight shaft pile diameter of  $d$  (i.e. helical pile shaft diameter) yields comparable values to the ones obtained by the parametric study.

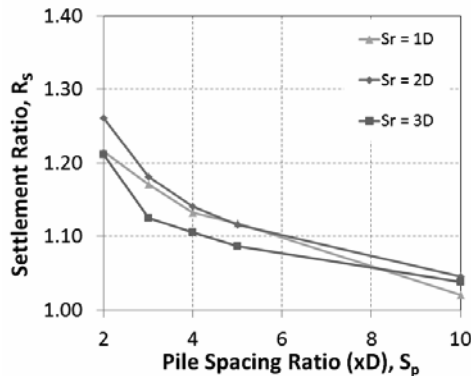


Figure 5. The settlement ratio for 4-piles group in sand with different  $S_r$ .

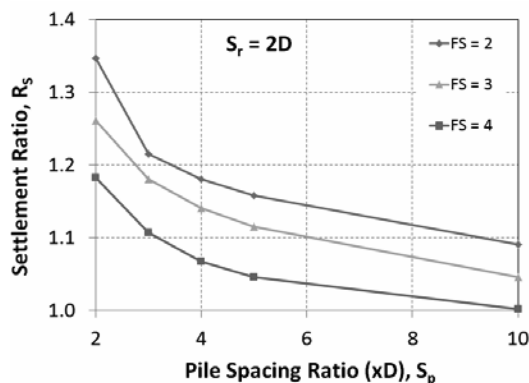


Figure 6. The effect of the factor of safety on the settlement ratio for 4-piles group in sand

For piles in clay, it is found that  $R_s$  could be as high as 1.33 for  $S_p = 2D$  and as low as 1.1 for  $S_p = 3D$ , as shown in Figure 7. The settlement ratios are the highest at  $S_p = 2D$  and decrease rapidly with increasing spacing. It is also found that  $S_r$  has a negligible effect on  $R_s$ .

Similar to piles in sand, it is also found that  $R_s$  for a group of piles is not a linear algebraic summation of the interaction factors,  $\alpha_{ij}$ , of the piles in the group. It is found that the empirical equation suggested by Randolph (Equation 1) overpredicts  $R_s$  by 80% for piles spaced at  $2D$  and by 100% for  $S_p$  greater than  $3D$ . In addition, using Poulos (1979) charts and Randolph and Poulos (1982) equation, (Poulos, 1988), to obtain  $\alpha_v$  assuming straight shaft piles diameter of  $D$  for  $S_p = 2D$  is found to overestimate  $\alpha_v$ . On the other hand, using the same charts and equation with a straight shaft pile diameter of  $d$  yields comparable values to the ones obtained by the parametric study.

Finally, in contrast to piles in sand, it is found that  $R_s$  at service load considering  $FS = 2$  is lower than  $R_s$  for service loads given by  $FS = 4$ , however the effect is negligible.

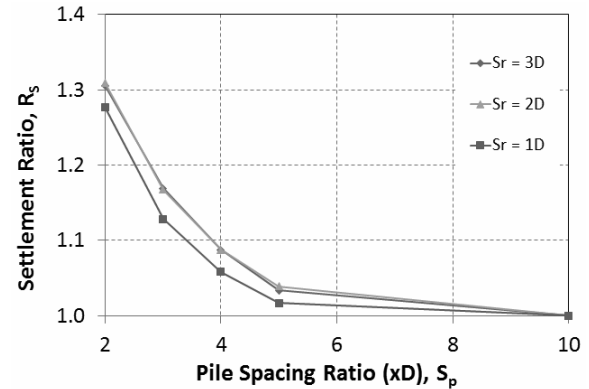


Figure 7. The settlement ratio for 4-piles group in clay with different  $S_r$ .

## 5 CONCLUSIONS

The performance of a helical pile group in sand or clay is mainly affected by the piles center to center spacing. The practical range of inter-helix spacing ( $1D$  to  $3D$ ) has negligible effect on  $R_s$ . The factor of safety,  $FS$ , could significantly affect  $R_s$  for piles in sand and has negligible effect for piles in clay. In addition, the settlement ratio,  $R_s$ , for a pile group is not simply an algebraic summation of the interaction factors,  $\alpha_{ij}$ , of the piles in the group.

Finally,  $R_s$  can be conservatively estimated using the methods reported herein using a straight shaft pile with a diameter equal to the shaft diameter of the helical pile. In general,  $R_s$  for helical piles with multiple helices spaced at a typical pile spacing of  $3D$  is in the range of 1.15 to 1.2 for both clay and sand.

## 6 ACKNOWLEDGEMENT

The authors wish to extend their thanks to the National Science and Engineering Research Council of Canada (NSERC) for the generous financial support. The authors also extend their thanks and appreciation to Helical Pier Systems (HPS) and Almita Piling Inc. for their continuous support.

## 7 REFERENCES

- ASTM. (2007). *Standard test methods for deep foundations under axial compressive load, D1143M-07*. West Conshohocken: ASTM International.
- Basile, F. (1999). Non-linear analysis of pile groups. *Proceedings of the Institution of Civil Engineers (UK), Geotechnical Engineering*, 137(2), 105-115.
- CFEM. (2006). *Canadian Foundation Engineering Manual* (4th ed.). Richmond, BC: BiTech Publishers Ltd.
- Livneh, B., & El Naggar, M. H. (2008). Axial testing and numerical modeling of square shaft helical piles under compressive and tensile loading. *Canadian Geotechnical Journal*, 1142-1155.
- Mitsch, M., & Clemence, S. (1985). The uplift capacity of helix anchors in sand. In S. Clemence (Ed.), *Proceedings of the Uplift Behaviour of Anchor Foundations in Soil* (pp. 26-47). Detroit: ASCE.
- Narasimha Rao, S., Prasad, Y., & Shetty, M. (1991). The behaviour of model screw piles in cohesive soils. *Journal of Soils and Foundations*, 31, 35-50.
- Poulos, H. (1988). *Marine Geotechnics*. London: Unwin Hyman Ltd.
- Rowe, R. K. (2001). *Geotechnical and geoenvironmental engineering handbook*. Massachusetts: Kluwer Academic Publishers.
- Randolph, M.F. (1994). Design methods for pile groups and piled rafts. *Proc. 13<sup>th</sup> Int. Conf. S.M. & Found. Eng.*, 5: 61-82.
- Int. Conf. S.M. & Found. Eng., 5: 61-82.
- SIMULIA. (2009). *Getting Started with ABAQUS: Interactive Edition*. Providence: Dassault Systèmes Simulia Corp.
- Zhang, D. J. (1999). *Predicting Capacity of Helical Screw Piles in Alberta Soils. Unpublished master's thesis*. Alberta, Canada: University of Alberta.