

Unmanned surface vehicles: An overview of developments and challenges

Zhixiang Liu^a, Youmin Zhang^{a,*}, Xiang Yu^a, Chi Yuan^a

^a*Department of Mechanical and Industrial Engineering, Concordia University, Montreal, Quebec H3G 1M8, Canada*

Abstract

With growing worldwide interest in commercial, scientific, and military issues associated with both oceans and shallow waters, there has been a corresponding growth in demand for the development of unmanned surface vehicles (USVs) with advanced guidance, navigation, and control (GNC) capabilities. This paper presents a comprehensive literature review of recent progress in USVs development. The paper first provides an overview of both historical and recent USVs development, along with some fundamental definitions. Next, existing USVs GNC approaches are outlined and classified according to various criteria, such as their applications, methodologies, and challenges. Finally, more general challenges and future directions of USVs towards more practical GNC capabilities are highlighted.

Keywords: Unmanned surface vehicles (USVs); Guidance, navigation and control (GNC); Autonomy.

1. Introduction

1.1. Background

Roughly two-thirds of the earth is covered by oceans (Yuh et al., 2011), but comparatively not a lot of the area has been thoroughly explored. Climate change, environmental abnormalities, personnel requirements, and national security issues have all led to a strong demand from commercial, scientific, and military communities for the development of innovative unmanned surface vehicles (USVs), also known as autonomous surface vehicles (ASVs) or autonomous surface crafts (ASCs). Despite this, only semi-autonomous USVs have normally been used rather than fully-autonomous USVs, owing to numerous challenges facing by the latter, such as limited autonomy due to the challenges in automated and reliable guidance, navigation and control (GNC) functions for all different operating conditions in face of sophisticated and hazardous environments, and sensor, actuator and communication failures. Further development of fully-autonomous USVs is required in order to minimize both the need for human control and the effects to the effective, safe and reliable USVs operation due to human error (Campbell et al., 2012).

USVs can be defined as unmanned vehicles which perform tasks in a variety of cluttered environments without any human intervention, and essentially exhibit highly nonlinear dynamics (Breivik, 2010). Further development of USVs are expected to produce tremendous benefits, such as lower development and operation costs, improved personnel safety and security, extended operational range (reliability) and precision, greater au-

tonomy, as well as increased flexibility in sophisticated environments, including so-called dirty, dull, harsh, and dangerous missions (Bertram, 2008; Breivik et al., 2008; Breivik, 2010; Roberts & Sutton, 2006).

With the aid of more effective, compact, commercially available and affordable navigation equipment, including global positioning systems (GPSs) and inertial measurement units (IMUs), as well as more powerful and reliable wireless communication systems (Manley, 2008), greater opportunities have been provided for USVs and their applications than ever before. USVs can be developed for a wide range of potential applications (as listed in Table 1) in a cost-effective way, such as scientific research, environmental missions, ocean resource exploration, military uses, and other applications.

USVs are always in competition with other manned or unmanned systems in terms of some specific applications (Savitz et al., 2013). Table 2 provides a brief comparison of these systems, and following advantages of USVs can be identified: 1) USVs can perform longer and more hazardous missions than manned vehicles; 2) Maintenance costs are lower and personnel safety is far greater since no crew is onboard; 3) The low weight and compact dimensions of USVs give them enhanced maneuverability and deployability in shallow waters (riverine and coastal areas) where larger craft cannot operate effectively; 4) USVs also have greater potential payload capacity and are able to perform deeper water depth monitoring and sampling compared to other aircraft/UAVs and spacecraft.

1.2. Motivation and Major Work

The future progress of USVs depends on the development of full-autonomy, enabling USVs to work in any unstructured or unpredictable environment without human supervision. The development of such an autonomy is very challenging, since it in turn demands the development of effective and reliable

*Corresponding author. youmin.zhang@concordia.ca; Tel: +1 514 848 2424 x5225

Email addresses: l_zhixia@encs.concordia.ca (Zhixiang Liu), ymzhang@encs.concordia.ca (Youmin Zhang), xiangyu1110@gmail.com (Xiang Yu), chi_yua@encs.concordia.ca (Chi Yuan)

Table 1: Potential applications of USVs

Types	Specific Applications
Scientific research	Bathymetric survey (Roberts & Sutton, 2006); ocean biological phenomena, and migration and changes in major ecosystems (Goudey et al., 1998); ocean activities research; multi-vehicle cooperation (cooperative work among aerial, ground, water surface or underwater vehicles) (Yan et al., 2010; Majohr & Buch, 2006); as experimental platforms for the purpose of testing hull designs, communication and sensor equipments, propulsion and operating systems, as well as control schemes (Breivik, 2010; Vaneck et al., 1996).
Environmental missions	Environmental monitoring, samplings, and assessment (Caccia et al., 2005; Rasal, 2013; Naeem et al., 2008b; Svec et al., 2014b); disaster (like tsunami, hurricane, eruption of submarine volcano) aided prediction and management, and emergency response (Murphy et al., 2008); pollution measurements and clean-up.
Ocean resource exploration	Oil, gas and mine explorations (Roberts & Sutton, 2006; Pastore & Djapic, 2010); offshore platform/pipeline construction and maintenance (Bertram, 2008; Breivik et al., 2008).
Military uses	Port, harbor, and coastal surveillance, reconnaissance and patrolling (Kucik, 2004; Caccia et al., 2007; Pastore & Djapic, 2010; Svec & Gupta, 2012); search and rescue (Roberts & Sutton, 2006; Murphy et al., 2008); anti-terrorism/force protection (Campbell et al., 2012); mine countermeasures (Navy, 2007); remote weapons platform (Bertram, 2008); target drone boats (Roberts & Sutton, 2006).
Other applications	Transportation (Kiencke et al., 2006); mobile communication relays (Caccia et al., 2008a); refueling platform for USVs, unmanned aerial vehicles (UAVs), unmanned underwater vehicles (UUVs), and other manned vehicles.

Table 2: Performance comparison of USVs and other vehicles

Attributes	● Clear advantage of USVs ◐ Near parity ○ Clear disadvantage of USVs					
	UUVs	Float Platforms	Satellites	Manned Ships	UAVs	Manned Aircrafts
Endurance	●	○	○	◐	●	●
Payload capacity	●	◐	●	◐	●	◐
Cost	◐	○	●	◐	●	●
Maneuverability	●	●	●	●	○	●
Deployability	●	●	●	●	○	●
Water depth measurement	○	◐	●	◐	●	◐
Autonomy requirement	◐	●	●	●	◐	●

USV systems, including reliable communication systems, suitable hull design, and powerful GNC strategies. Despite strong demand for comprehensive reviews reporting, organizing and comparing the large diversity of existing USV research, only a few survey papers have been published reviewing selected subsets in a specific area of USV research, such as Campbell et al. (2012) for collision avoidance, Caccia (2006b) for basic research issues, and Bertram (2008); Manley (2008); Motwani (2012) for USVs prototypes.

Motivated by the scarcity of comprehensive surveys, and the particular needs of this field, this paper is intended to review and highlight the specific requirements of USVs development based on notable research conducted to date, focusing primarily on different GNC techniques, which are necessary and challenging for achieving fully-autonomous USVs in the near future to be practically and reliably used for different applications. This survey can be divided into three sections: 1) an overview of fundamental elements of USV systems, their current development, and their basic research issues; 2) a systematic summary

of the key GNC methodologies and techniques of USVs that have so far been explored; and 3) a description of current technical challenges and possible future research directions. Due to space limitation, emphasis has been placed mainly on refereed journal publications. Despite authors' best effort, many conference papers may not be included, we sincerely apologize for any omission.

1.3. Contributions

By offering a comprehensive overview of significant milestones and open problems in the field of USV GNC systems, this work can be employed to the benefit of the USV research community, enabling a reduction in research duplication, better identification of bottlenecks in this field, and a significant increase in the autonomous capabilities of future USVs systems. To the best knowledge of authors, no attempt has so far been made to compile such a comprehensive survey in this area.

1.4. Organization

This paper is organized as follows: Section 2 provides an overview of USVs systems. Sections 3, 4, and 5 conduct comprehensive surveys of guidance, navigation, and control techniques, respectively. Section 6 presents an overview of multi-USV coordination systems. Challenging issues and future directions are introduced in Section 7. Finally, concluding remarks are drawn in Section 8.

2. State-of-the-Art USV Systems

2.1. R&D Progress of USVs

Numerous institutions, universities, businesses and militaries have begun developing USVs for various applications over the past two decades. Recent developments are listed in Table 3, which in spite of our best efforts may not constitute an exhaustive list. Current USVs development remains immature (Roberts & Sutton, 2006). Most existing USVs are confined to experimental platforms, comprised primarily of relatively small-scale USVs with limited autonomy, endurance, payloads, and power outputs (Savitz et al., 2013), as well as still requiring remote operation (Breivik et al., 2008). USVs remain scarce in commercial markets, and the majority of industrial-level USVs are still used within military and research applications. For an overview of the developed prototype vessels and basic design issues, readers can also refer to the publications by Bertram (2008); Manley (2008); Motwani (2012).

2.2. Elements of USVs

Depending on practical applications, USVs may come in a variety of appearances and functionalities. However, the following basic elements that must be included in every USV (see also Fig. 1):

1. *Hull and auxiliary structural elements*: Hull variations can be grouped into one of four different types: rigid inflatable hulls (Motwani, 2012), kayaks (single hull) (Curcio et al., 2005), catamarans (twin hulls) (Naeem et al., 2008b), and

Table 3: USV development from 1985 to date

Country	Year	USV Name	Research Purpose & Major Achievements
USA	1993	ARTEMIS (Vaneck et al., 1996)	1) Systems test; 2) Bathymetry sampling
	1996	ACES (Manley, 1997)	1) Oceanographic data collection
	1998	SCOUT (Goudey et al., 1998)	1) Cooperative control; 2) Testbed
	1990s	Roboski (Bremer et al., 2007)	1) Surveillance; 2) Target drones
	1990s	Owls USVs (Motwani, 2012)	1) Harbor and ship security
	2000	AutoCat (Manley et al., 2000)	1) Survey of shipwreck
	2001	Spartan Scout (Motwani, 2012)	1) Port surveillance; 2) Force protection
	2003	USSV-HTF (Motwani, 2012)	1) Towing various sensors and effectors
	2005	WASP (Mahacek, 2005)	1) Stability test; 2) Bathymetric mapping
	2005	Seadoo Challenger 2000 (Ebken et al., 2005)	1) Collision avoidance; 2) Autonomous recovery
	2005	HUSCy (Curcio et al., 2005)	1) Hydrographic survey
	2008	Wave Glider (Bingham et al., 2012)	1) Data collection
	2008	Nereus (Beck et al., 2009)	1) Stability test; 2) Bathymetric mapping
	2009	SeaWASP (Furfaro et al., 2009)	1) Environmental monitoring; 2) Testbed
UK	2010	Piranha (Yang et al., 2011)	1) Reconnaissance
	2011	MUSCL (Bertram, 2008)	1) Surveillance and reconnaissance
	1990s	MIMIR (Roberts & Sutton, 2006)	1) Shallow water search and survey
	2000s	C-series USVs (Anonymous, 2014a)	1) Assets security; 2) Environmental monitoring; 3) Mining
	2000s	FENRIR (Roberts & Sutton, 2006)	1) Relay between UUV and control center
	2000s	Sentry (Murray, 2008)	1) Harbor and shore survey and protection
	2003	SWIMS (Roberts & Sutton, 2006)	1) Mine sweeping
	2003	SeaFox (Yakimenko & Kragelund, 2011)	1) Maritime security operations
Canada	2004	Springer (Naeem et al., 2008b)	1) Environment monitoring; 2) Test platform
	2008	Blackfish (Sonnenburg, 2012)	1) Harbor protection and patrol
	1983	DOLPHIN (Curcio et al., 2005)	1) Bathymetric mapping
	2000s	Barracuda (Bertram, 2008)	1) As sea-surface target system
Italy	2000s	Hammerhead (Bertram, 2008)	1) Simulating a multi-vehicle swarm threat
	2004	SESAMO (Caccia et al., 2005)	1) Environmental sampling
	2005	Charlie (Caccia et al., 2007)	1) Environmental sampling and survey
	2007	ALANIS (Bibuli et al., 2012)	1) Environmental sampling and survey
Portugal	2008	U-Ranger (Motwani, 2012)	1) Mine sweeping; 2) Harbor protection
	2000	CARAVELA (Pascoal et al., 2006)	1) Oceanographic sampling; 2) Testbed
	2004	DELFIN (Alves et al., 2006) and DELFIMX (Gomes et al., 2006)	1) Oceanographic sampling; 2) Communication with UUVs
	2006	ROAZ I & II (Martins et al., 2007a)	1) Search and rescue
Norway	2006	Swordfish (Ferreira et al., 2007)	1) Environmental survey
	2008	Kaasbøll (Breivik et al., 2008)	1) Navigation and control systems test
	2008	Viknes (Breivik, 2010)	1) Multi-purpose system tests
	2000s	Mariner (Breivik, 2010)	1) Environmental surveillance and sampling
Israel	2003	Protector (Breivik et al., 2008)	1) Reconnaissance; 2) Counter-mine
	2005	Seastar (Yang et al., 2011)	1) Port, coastal survey; 2) Reconnaissance
	2005	Stingray (Bertram, 2008)	1) Homeland security and coastguard
	2007	Silver Marlin (Bertram, 2008)	1) Surveillance and reconnaissance
Germany	1998	MESSIN (Majohr & Buch, 2006)	1) Water ecological study
	2005	Basil (Bertram, 2008)	1) Offshore pipelines survey
France	2005	MiniVAMP (Bertram, 2008)	1) Remote survey of offshore pipelines
	2007	Inspector (Yang et al., 2011)	1) Surveillance and reconnaissance
Sweden	2002	Piraya (Yang et al., 2011)	1) Cooperative control
Singapore	2010	Venus (Bertram, 2008)	1) Multi-tasks test
China	2008	Tianxiang One (Yan et al., 2010)	1) Meteorological survey
	2010	USV-ZhengHe (Yang et al., 2011)	1) Inshore marine data collection
Japan	2000	Kan-Chan (Desa et al., 2007)	1) Study of global warming
	2004	UMV series (Bertram, 2008)	1) Ocean and atmosphere exploration
India	2006	ROSS (Desa et al., 2007)	1) Oceanographic sampling

trimarans (triple hulls) (Peng et al., 2009). These variations in hull design correspond to different USV applications, revealing some basic design issues and trends in USVs development. Rigid inflatable hulls are suitable for military applications primarily because of their greater endurance and payload capacity. Kayak and catamaran designs are popular due to their convenient mounting and loading. Moreover, Kayak USVs are easy to manufacture or modify from manned surface vehicles. Catamaran and trimaran USVs are often preferred due to their greater system stability, decreasing the risk of capsizing in rough water (Campbell et al., 2012), along with providing greater payload capacity and redundancy.

2. *Propulsion and power system*: Heading and speed control of most existing USVs are provided by rudder and propeller (or water jet) propulsion systems, respectively,

while others (mainly catamaran USVs) are steered by differential thrust, provided by two independent motors attached to each hull. However, these USVs are typically not equipped with additional side actuators and thus can be considered as under-actuated USVs. In other words, the number of available actuators is less than the USVs' degrees of freedom (DOF) in motion. This represents a significant challenge to safe and precise control in under-actuated USVs. Other fully- and over-actuated USVs are relatively easier to operate than under-actuated USVs, but these come with comparatively higher costs (Breivik, 2010).

3. *GNC systems*: As the most vital component of a USV, GNC modules are generally constituted by onboard computers and software, which together are responsible for managing the entire USV system.

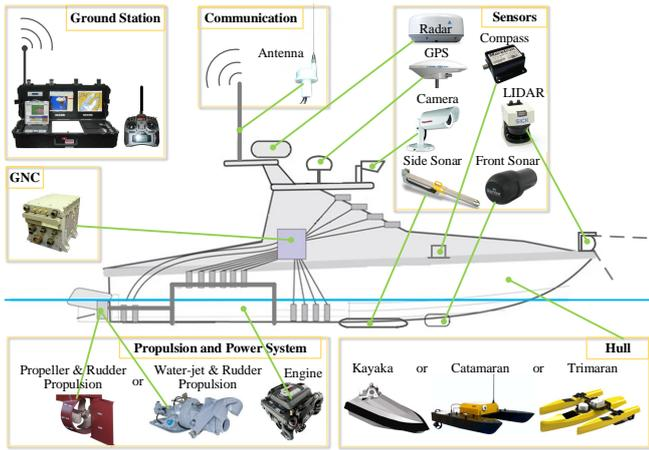


Figure 1: Fundamental architecture of a typical USV.

4. *Communication systems*: Communication systems include not only wireless communication with ground control stations and other vehicles to perform cooperative control, but also onboard wired/wireless communication with a variety of sensors, actuators, and other equipment. Reliability of communication systems is therefore of paramount importance.
5. *Data collection equipment*: Together with the above-mentioned components, IMUs and GPS as the basic sensors are typically used in combination with the system to guarantee the USV remains in good operating condition, and to improve its performance. Besides, cameras, radar, sonar, as well as other kinds of sensors are optionally adopted, depending on the specific task at hand, such as monitoring and operating USV under all different conditions (i.e. cabin temperature and humidity, electronic equipment health, fuel consumption, etc.) (Roberts & Sutton, 2006).
6. *Ground station*: Ground station also plays an important role in USV GNC, which can be located in an onshore facility, a mobile vehicle or an offshore ship. In general, missions are assigned to USVs via wireless communication systems. The real-time status of the USV and its onboard equipment are all monitored by the ground station, while for remotely operated USVs, control commands are also sent from ground station.

2.3. Relationships among USV Subsystems

As indicated in Fig. 2, the fundamental elements for autonomously operating USVs generally constitute guidance, navigation, and control subsystems (Fossen, 1994, 2002, 2011). These subsystems work in interaction with each other, to the point where imperfections in one subsystem may degrade the performance of the whole system.

1. *Guidance system* is responsible for continuously generating and updating smooth, feasible, and optimal trajectory commands to the control system according to the information provided by the navigation system, assigned missions, vehicle capability, and environmental conditions.

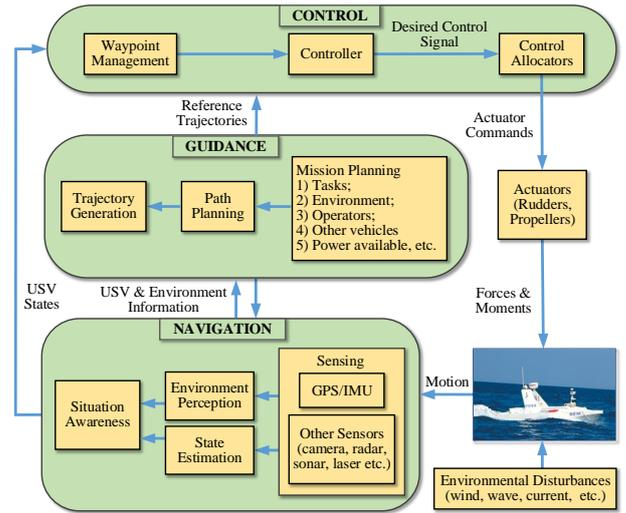


Figure 2: General structure of USV guidance, navigation, and control systems.

2. *Navigation system* concentrates on identifying the USV's current and future states (such as position, orientation, velocity, and acceleration), and its surrounding environment based on the past and current states of the USV as well as environmental information including the ocean currents and wind speed) obtained from its onboard sensors.
3. *Control system* focuses on determining the proper control forces and moments to be generated in conjunction with instruction provided by the guidance and navigation systems, while at the same time satisfying desired control objectives.

In the following sections, more attention is paid to different GNC methodologies for USVs, presented in the sequence of guidance, navigation, and control.

3. Classification of USV Guidance Techniques

A feasible guidance system is an essential component for increasing USV autonomy, while more advanced guidance capabilities are required to accomplish tasks under more complicated and strict constraints, including poorly mapped environments and real-time computational requirements (Fossen, 2002; Kendoul, 2012). To provide a basic understanding of current research interests on USV guidance systems, a brief classification is first illustrated in Fig. 3.

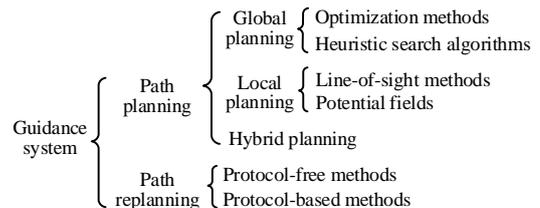


Figure 3: Classification of USV guidance systems with respect to functions and methods.

3.1. Path Planning

As the fundamental aspect of USV guidance systems, path planning can generally be distinguished between the global and local approaches. From the literature, a broad spectrum of efficient and intelligent path planning techniques for USVs are identified in the following:

3.1.1. Global Path Planning

1. *Optimization methods*: As an attractive method, advanced optimization method (OM) can directly produce optimal trajectories or paths that might include sophisticated characteristics, such as spatiotemporal-optimal, danger level (collision probability), fuel saving, weather routing, formation control, and scheduled missions.

Inspired by the behaviour of biological systems, evolutionary algorithm (EA) represent a class of artificial intelligence increasingly employed in the design of USV path planners. EA can be characterized into an optimization problem with specified constraints. Genetic algorithm (GA) are to date the most widely adopted method for waypoints generation (Campbell et al., 2012). In Svec & Gupta (2011, 2012), a strongly-typed genetic programming (GP)-based evolutionary approach is developed to enable USVs to protect a target from intruder boats.

Due to their expensive computational costs, especially when constraints such as obstacles, USV dynamic limits, and mission constraints must be satisfied, optimization methods are limited for real-time implementation.

2. *Heuristic search algorithms*: Application of heuristic approaches in path planning first appeared in the early 2000s. The A^* search algorithm is a widely used grid-based strategy, which can quickly find an optimal path with the least number of nodes. But the drawbacks of large computational memory costs and unwanted sharp turns result in difficulty in its practical application in the cases where quick and real-time control of USVs are necessary.

In Larson et al. (2006), the A^* search algorithm is chosen to find an optimal path within a limited amount of time. Another application is presented in Naus & Waz (2013), where the A^* algorithm is employed to search the shortest and safest trajectory in an electronic navigational chart. A^* and locally bounded optimal planning under uncertainty are combined in Svec et al. (2011). In Zhuang et al. (2012), a marine radar image-based local path planning method is developed for USVs. The path is searched by Dijkstra's algorithm which is a special case of the A^* algorithm. To improve performance with respect to paths and computational consumption, a modified version of the A^* algorithm named as direction priority sequential selection (DPSS) is applied in Naeem et al. (2012a). In Svec et al. (2012), a combination of a model-predictive and an A^* based algorithm is introduced. An A^* based curvature path planning algorithm is proposed in Kim et al. (2013), where both the actual turning capability of USVs, and the environmental information, such as the terrain, buoy and fairway, are explicitly considered in the cost map.

3.1.2. Local Path Planning

1. *Line-of-sight*: A successful guidance technique that is widely employed in missile guidance, line-of-sight (LOS) methods are equally valid for USVs (Annamalai & Motwani, 2013; Breivik et al., 2008; Caccia et al., 2005, 2008a; Desa et al., 2007; Fredriksen & Pettersen, 2006; Naeem et al., 2012b; Peng et al., 2013a; Sharma & Sutton, 2013; Tran et al., 2014; Xu et al., 2007). There are also modified versions for better real-time implementation such as biased-LOS (Naeem et al., 2012a). Despite these, there are still drawbacks associated with LOS, including: 1) the potential to overshoot, caused by the environmental disturbances compensating action (Campbell et al., 2012), and 2) the connection between the waypoints still being rigid lines, even though paths have been smoothed to some extent.
2. *Potential fields*: As defined in the potential field (PF) approach, the objectives are assigned with attractive fields, while obstacles are distributed with repulsive fields. USVs are thus moving toward the attractive fields and away from the repulsive fields (Khatib, 1986). Although this method is characterized by its effective implementation and low computational consumption in real-time, it is normally only employed for local path planning since it is prone to guide USVs to local minima instead of the objectives (Campbell et al., 2012).

An interesting implementation of a PF-based USV path planning scheme is introduced in Healey et al. (2007). In Soltan et al. (2009), obstacles are approximately enclosed by ellipse fields which are the solutions of a class of ordinary differential equations (ODEs). However, much effort is still required to overcome the local-minima problem by employing depth-first and best-first search techniques, wavefront-based strategies, or harmonic potential functions.

3.1.3. Hybrid Path Planning

In order to ensure the safe and effective path planning for USV moving among the preliminarily specified or dynamically changing waypoints in the dynamic and hazardous environment, increasing efforts have recently been dedicated to the hybrid path planning strategy that consists of both global and local path planning approaches. In Larson et al. (2006, 2007), a hybrid path planning approach is presented, which is constituted by a two-layered hierarchical architecture combining with both global and local path planning functions. The A^* algorithm is employed to find a feasible solution for the global path planning, while a behavior-based common world model approach is utilized to manage the near-field changes that arise to the previously defined path, so that the USV can keep following the preplanned path. Casalino et al. (2009) presents a multi-layered hierarchical architecture, a global path is computed in the first layer based on the Dijkstra algorithm, while the second layer modifies this predefined path in a locally optimal way adopting the A^* method. In Svec et al. (2012), a lattice-based hybrid path planning method is developed with consideration of the USV dynamics.

3.2. Path Replanning

As the major role of path replanning, collision avoidance (Yu & Zhang, 2015) is generally overlooked in the basic guidance laws (an obstacle-free path is commonly assumed). Unfortunately, recent statistics show that 60% of casualties at sea are caused by collisions (Naeem et al., 2012a). Obstacles, such as lobster traps, buoys, fishing nets, submerged rocks, other maritime traffic, new constructions, variable water levels, and sea debris, can all potentially contribute to collision risks. Without the ability to avoid collisions, USVs may collide with any objects present along the planned path. In addition, a collision avoidance module can also enhance the autonomy of USVs to avoid approaching objects by conducting autonomous path replanning.

3.2.1. Protocol-free Collision Avoidance

In Soltan et al. (2011), obstacles are assumed to be enclosed by elliptical shapes, and a set of ordinary differential equations are defined for collision avoidance. This technique is validated using multiple dynamical obstacles in simulation, and stationary obstacles in experiments. Xu et al. (2013) presents a path replanning approach based on the level set methods, which is employed to compute the minimum risky path. In Kim et al. (2014), an angular rate-constrained $Theta^*$ ($ARC - Theta^*$) is proposed to regenerate paths in real-time with consideration of constraints in both yaw rate and heading angle of USV. An optical-flow based approach is designed to provide local reactive collision avoidance in El-Gaaly et al. (2013). This research employs a monocular camera, overcoming the challenges of water reflections and visual noises in an acceptable range. In Bertaska (2013), a lattice-based path planning method is implemented with a *priori* knowledge of the USV characteristics.

Most of the existing research focuses only on detecting and avoiding obstacles above the water. Until recently, little attention has been paid to underwater collision avoidance in USVs, despite the significant risk of collision from submerged obstacles, including reefs and shallow banks. Pioneering work on this issue is carried out in Heidarsson & Sukhatme (2011); Onunka et al. (2013), where active acoustic sonar is mounted on their USVs in order to provide information on underwater obstacles. Additionally, a direct method based on inverse dynamics in the virtual domain (IDVD) strategy is reported in Yakimenko & Kragelund (2011) to compute a near-optimal collision-free trajectory.

3.2.2. Protocol-based Collision Avoidance

56% of collisions at sea are caused by violations of coast guard collision regulations (COLREGs) (Statheros et al., 2008; Naeem et al., 2012a). In order to suggest possible maneuvers to avoid collisions and increase the autonomy of USVs, COLREGs should be included in USV design, describing most potential collision scenarios, such as overtaking, head-on, and crossing situation (Campbell et al., 2012).

Lee et al. (2004) devised and demonstrated a modified virtual force field (MVFF) method that satisfies COLREGs guidelines in a USV simulation, which was successful in avoiding both stationary and dynamic obstacles. Such a method may encounter

greater difficulty in the case of multiple obstacles. Another study employs a behavior-based control and multi-objective action selection method in a kayak USV under the COLREGs rules (Benjamin & Curcio, 2004). Subsequent work by the authors (Benjamin et al., 2006) presented the first in-field implementation of COLREGs on two kayak-based SCOUT USVs. In Larson et al. (2007), a near-field reactive control technique is applied in a ‘‘SSC San Diego’’ USV. Although being able to rapidly and effectively avoid most obstacles, the generated trajectory under this method is not optimal. Obeying the COLREGs, a relative coordinate based collision avoidance strategy with integration of an evolutionary path planner is discussed in Zhuang et al. (2011). A successful application of avoiding both static and dynamic obstacles along a non-optimal trajectory is proposed by Naeem et al. (2012a), who adopted a simple manual biasing scheme and a direction priority sequential selection (DPSS) strategy under COLREGs. As an on-line extension of the standard A^* algorithm, a rule-based repairing A^* ($R - RA^*$) algorithm in compliance with COLREGs is introduced in Campbell et al. (2013). This approach differs from the offline global path planning methods, being able to update and smooth the local path in real-time, responding to any changes along the predefined trajectory. Recently, a velocity obstacles (VO) method is adopted in Kuwata et al. (2014), avoiding dynamic and static hazards while conforming to COLREGs constraints. More relative research can be referred to Shah et al. (2014); Svec et al. (2012, 2013, 2014a).

4. Classification of USV Navigation Techniques

Safe and efficient control of USVs depends heavily on an appropriate navigation system with sensing, state estimation, environment perception, and situation awareness capabilities. This section briefly reviews existing USV navigation techniques (as shown in Fig. 4).

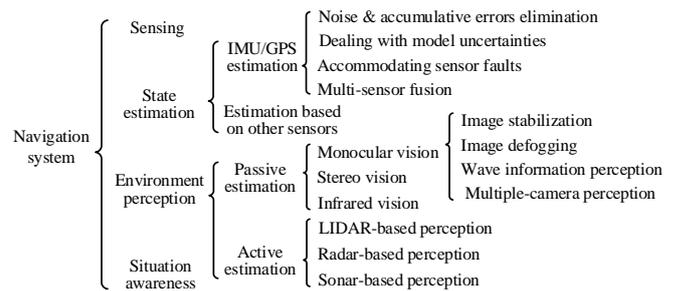


Figure 4: Classification of USV navigation systems with respect to functions and methods.

4.1. Sensing Technologies

Adequate sensing capabilities are generally required to enhance the performance of USVs. Furthermore, marine environments also impose harsh restrictions on sensory requirements. Heterogeneous sensors are usually employed in order to make the best use of different sensors’ characteristics, and achieve

superior navigation performance. Table 4 indicates the characteristics of various sensors used in the development of USV navigation systems.

4.2. USV State Estimation

In general, only the position and orientation of the USV are provided by onboard sensors. Determination of its velocity and acceleration requires reconstruction based on measured information. Critical to this process is the state estimation technique, which traces the current state of the USV. In terms of currently utilized sensing technologies, state estimation methods can be classified into either conventional GPS-IMU-based approaches or techniques based on other sensors.

4.2.1. State Estimation with Conventional GPS-IMU

Performance specifications often require that GPS and IMU systems provide high-resolution position, orientation and velocity estimates. Unfortunately, these estimates can be very imprecise in practical applications (Bibuli et al., 2009) due to influences from 1) environmental noises; 2) accumulative errors resulting from inherent drift; 3) time-varying model uncertainties; and 4) sensor faults. Additional correction actions are hence required to improve navigation performance.

1. *Noise and accumulative error elimination:* In Lefeber et al. (2003), a nonlinear passive observer (Fossen & Strand, 1999) is employed to estimate the position and velocity of the USV. Based on the Kalman filter, the heading estimate of a Springer USV is provided by a combination of the actual compass measurement and the predicted information of a dynamic compass model (Annamalai & Motwani, 2013). In Bibuli et al. (2009); Caccia et al. (2008a); Tran et al. (2014), the USV's position and velocity are estimated using an extended Kalman filter (EKF) on the basis of a practical dynamic model and both GPS and compass measurements. An adaptive unscented Kalman filter (UKF) is proposed for state estimation without *a priori* knowledge of noise distribution (Peng et al., 2009). In Vasconcelos et al. (2011b), a DELFIM catamaran USV is equipped with both GPS and IMU systems. Inertial sensor bias and noise are compensated by using EKF, integrating vector observations, and taking into account the dynamics of the USV. Subsequent research by Vasconcelos et al. (2011a) applies a complementary filter to the DELFIM USV that combines the strapdown inertial measurements, vector observations, and GPS aiding to estimate its attitude, while the bias of rate gyro is also compensated.
2. *Dealing with model uncertainties:* In Motwani et al. (2013), a robust USV heading estimation technique named after an interval Kalman filter (IKF) is investigated in an attempt to bound model uncertainties caused by varying environment, payload, and operating conditions. A high-gain observer is employed to estimate immeasurable states in Tee & Ge (2006).
3. *Accommodating sensor faults:* Salt spray and moisture can potentially damage sensors, communication interfaces, and cables. USV navigation is thereby extremely difficult in marine environments, requiring the development of

more intelligent techniques. Some studies (Xu et al., 2007; Naeem et al., 2012b) propose and implement a federated Kalman filter (FKF), modified by a fuzzy logic adaptive (FLA) technique, in order to deal with different types of sensor faults that are injected in a Springer USV. Triple redundancy in compasses is used, and global estimates of the real state of the USV are provided by this intelligent multi-sensor data fusion methodology.

4. *Multi-sensor fusion:* In practice, multiple sensors are usually adopted for state estimation in order to offer the control system with sufficient navigation information to effectively perform the desired tasks. But some sensors provide data with low update rates (like GPS) while others provide data at high rates. State estimation methods that fuse these measurements have clear advantages on accurate and reliable navigation information. The existing work in this area includes complementary filter (Vasconcelos et al., 2011a), federated Kalman filter and fuzzy adaptive technique (Xu et al., 2007), and multiple model adaptive estimation (Sutton et al., 2011).

4.2.2. State Estimation Based on Other Sensors

In addition to conventional state estimation techniques, active ranging sensor (LIDAR, radar and sonar) methods can also be employed for state estimation, especially in cases of a loss or jamming of GPS signals. Additionally, vision-based approaches outperform active navigation in terms of power consumption, size, weight, and cost, and are therefore an excellent option for both navigation and data collection.

4.3. Environment Perception

In order to perform missions in real-world environments, USVs are normally required to possess the ability to detect obstacles, recognize and track targets, and map environments, all in real-time. Furthermore, the unique conditions experienced in marine environments, such as environmental disturbances (winds, waves, and currents), sea fog, and water reflection, can also impact the performance of environment perception. Environment perception approaches for USVs can be generally grouped into two categories according to the characteristics of intended application: 1) passive perception methods, and 2) active perception methods.

4.3.1. Passive Perception Methods

Passive perception methods adopting visual/infrared sensors are widely employed in environment perception applications.

1. Monocular vision:

- (a) *Image stabilization:* To solve the problem of warp and shaking due to USV motion, it is of paramount importance to stabilize the obtained images before subsequent image processing. Gal (2011a) uses a low-cost camera, and applies image stabilization and smoothing techniques to recognize and identify obstacles around the USV.
- (b) *Image defogging:* As a common maritime phenomenon, sea fog can cause serious image degradation. In Ma et al.

Table 4: Advantages and limitations of various sensors with application to USVs

Sensors	Advantages	Limitations
Radar	1) Long detecting range; 2) Provides nearly all-weather and broad-area imagery; 3) High depth resolution and accuracy.	1) Skewed data from fast turning manoeuvres; 2) Limited small and dynamic targets detection capability; 3) Susceptible to high waves and water reflectivity.
LIDAR	1) Good at near range obstacle detection; 2) High depth resolution and accuracy.	1) There exists sensor noise and calibration errors; 2) Sensitive to environment and USV motion.
Sonar	1) No visual restrictions; 2) High depth resolution and accuracy.	1) Limited detecting range in each scanning; 2) Impressionable to the noise from near-surface.
Visual sensor	1) High lateral and temporal resolution; 2) Simplicity and low weight in practical application.	1) Low depth resolution and accuracy; 2) Challenge to real-time implementation; 3) Susceptible to light and weather condition.
Infrared sensor	1) Applicable for dark condition; 2) Low power consumption.	1) Indoor or evening use only; 2) Impressionable to interference and distance.
IMU	1) Small size, low cost, and power consumption.	1) Sensitive to accumulated error and magnetic environment.
GPS/DGPS	1) Small size, low cost, and power consumption.	1) Susceptible to shelters and magnetic environment.

(2013), the accuracy of obstacle detection and target tracking are significantly improved by developing a visual-based image defogging method. Given that this method is only validated by video, future investigation on real-time implementation and defogging approaches without the obvious sea-sky-line is recommended.

- (c) *Wave information perception*: Liu & Wang (2013) present an interesting application of detecting wave grade using visual-based techniques to provide USVs with environmental information. Based on the Fourier transform theory, this method can effectively determine the wave grade in different light conditions and sea states.
 - (d) *Multiple-camera method*: Traditional fixed and moving sensors are concerned only with short timescales. In Subramanian et al. (2006); Wolf et al. (2010), a novel 360-degree omni-directional camera head is developed for environment perception, which can identify targets over long timescales. A probability of existence method is invented to cope with the challenge of reliability of target tracking, in particular when targets leave the camera scope during some timescales.
2. *Stereo vision*: A depth map can be employed to generate an obstacle map of the area in front of a USV, which is appropriate for near-field collision avoidance. In Huntsberger et al. (2011), a first fielded stereo vision system “Hammerhead” is tailored for use with a USV to generate both probabilistic hazard maps and targets with estimated speed and heading. However, higher resolution cameras and dedicated hardware are required to increase the range of perception, and stereo vision techniques suffer from precise calibration requirements each time a camera is mounted.
 3. *Infrared vision*: Long-wave infrared (IR) cameras are an ideal solution to overcome the impact of various light conditions (such as night and fog) on environment perception, enabling both day and night operation. Unfortunately, research on IR applications on USV environmental perception remains minimal.

4.3.2. Active Perception Methods

LIDAR, radar, and sonar are the main active sensors to be extensively adopted in environment perception.

1. *LIDAR*: Cluttered and moving platforms challenge real-

time target detection and tracking using LIDAR. Solutions for decluttering LIDAR measurement are proposed in Gal & Zeitouni (2013), while a probability hypothesis density (PHD) Bayes filter is also developed to identify and track targets. Further practical implementation for algorithm validation of these methods is still required.

2. *Radar*: Radar is the main option for obstacle detection in the far-field (Larson et al., 2006). In Onunka & Nnadozie (2013), USVs are equipped with obstacle and target tracking filters for detecting obstacles and tracking targets by processing radar images. The results conclude that the narrower variability of radar signals, the wider coverage of detection, and the growth of echo power and frequency are possible by increasing the radar sweep width. A radar-based target detection method is proposed in Ji et al. (2014), which addresses background noise and variant brightness issues, and allows targets to be successfully extracted in real-time.
3. *Sonar*: To date, sonar remains the most suitable option for collecting data on underwater environments. In Heidarsson & Sukhatme (2011), a forward-facing active acoustic sonar is mounted on a USV for obstacles detection. In Yakimenko & Kragelund (2011), detection and localization of obstacles are provided by a forward looking sonar system deployed on a SeaFox USV. In order to reduce the uncertainties and exceptions adversely affected by the sonar propagation characteristics, a sonar-based obstacle detection method is investigated in Onunka et al. (2013). In Leedekerken et al. (2014), sonar images are used for mapping the underwater environment as well.

4.4. Situation Awareness

Situation awareness (SA) is essential for designing USVs with higher levels of autonomy. Wolf et al. (2010) is one of the few existing research studies examining SA in USV systems, in which an object-level tracking and change detection (OTCD) method is developed for detecting targets, confirming their location, and recognizing variations in the surrounding environment during patrol missions. An additional problem is that GPS signals may become weak when the USV is in close proximity to bridges, foliage canopies, and other sheltered environments. Simultaneous localization and mapping (SLAM) is deemed as a

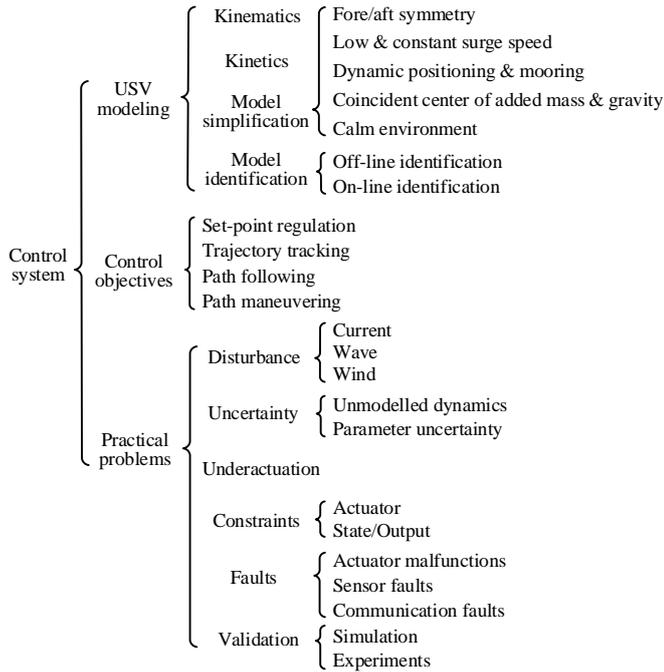


Figure 5: Classification of USV control systems in terms of problems and functions.

potentially effective choice for USV navigation in these scenarios. In Leedekerken et al. (2014), a SLAM method for concurrently mapping the marine environment above and below the water is addressed, which attempts to navigate the USV with the degradation of GPS signals in close proximity to bridges or foliage canopies.

5. Classification of USV Control Techniques

With the considerable development of advanced control theory, state-of-the-art control techniques are continually being designed to enhance USV performance in the marine research community (Campbell et al., 2012), see Fig. 5 for an overview of the work on USVs control systems.

5.1. USV Modeling

The availability of a sufficiently accurate USV model enabling effective control design is imperative for both control methodology design and simulation study purposes. This in turn requires prior investigation of both a precise mathematical USV model and reasonable system parameters. Generally, a standard USV model consists of both kinematics and kinetics.

5.1.1. Kinematics

With respect to USV control, there is no requirement for consideration of either passenger comfort or cargo stability. Its primary purpose is merely to ensure the USV follows the desired path as accurately as possible. Based on this characteristic, the general six-DOF model can be reduced to only consider motion in the surge/forward, sway/lateral, and heading/yaw categories

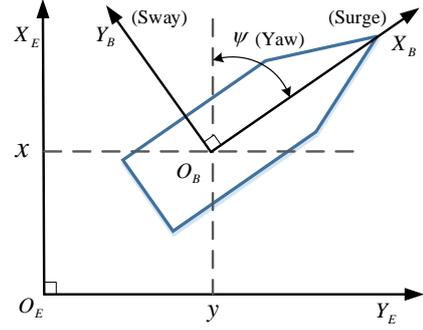


Figure 6: Schematic diagram of USV planar motion (Note: $X_E O_E Y_E$ is the earth-fixed reference frame, while $X_B O_B Y_B$ denotes the body-fixed reference frame).

only, while the dynamics associated with the motion in roll, pitch, and heave are generally neglected to maintain model simplicity (Do & Pan, 2009). As shown in Fig. 6, the typical USV kinematic model (Fossen, 2002) in planar motion and without the presence of disturbances can then be expressed as:

$$\dot{\eta} = \mathbf{R}(\psi)\mathbf{v}, \quad (1)$$

where $\eta = [x, y, \psi]^T$ denotes the vector of position and orientation with coordinates in the earth-fixed reference frame, $\mathbf{v} = [u, v, r]^T$ denotes the vector of linear and angular velocity with coordinates in the body-fixed reference frame,

$$\mathbf{R}(\psi) = \begin{bmatrix} \cos \psi & -\sin \psi & 0 \\ \sin \psi & \cos \psi & 0 \\ 0 & 0 & 1 \end{bmatrix}$$

denotes the transformation

matrix between the earth-fixed reference frame and body-fixed reference frame. (x, y) and ψ are the position and orientation (yaw/heading angle) of the USV in the earth-fixed reference frame, while u , v , and r represent the velocity of surge, sway, and yaw in the body-fixed reference frame, respectively. Due to the existence of disturbances (winds, waves, and currents) and the rapid turning of the USV with high surge speed, the so-called sideslip phenomenon may also occur (Sonnenburg & Woolsey, 2013). To consider this phenomenon with the resultant velocity $V = \sqrt{u^2 + v^2}$, the sideslip angle β , and the course angle χ ; $\mathbf{R}(\psi)$ and \mathbf{v} can be written as:

$$\begin{aligned} \mathbf{R}(\psi) &= \begin{bmatrix} \cos \psi & -\sin \psi & 0 \\ \sin \psi & \cos \psi & 0 \\ 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} \cos \beta & -\sin \beta & 0 \\ \sin \beta & \cos \beta & 0 \\ 0 & 0 & 1 \end{bmatrix} \\ &= \begin{bmatrix} \cos \chi & -\sin \chi & 0 \\ \sin \chi & \cos \chi & 0 \\ 0 & 0 & 1 \end{bmatrix} \text{ and } \mathbf{v} = \begin{bmatrix} V \\ 0 \\ r \end{bmatrix}, \end{aligned} \quad (2)$$

where $\beta = \arcsin(\frac{v}{V})$, and $\chi = \psi + \beta$.

5.1.2. Kinetics

In addition to kinematic models, USV dynamic models have also been extensively studied. The reason for this is their crucial importance for advanced controller design (Do & Pan, 2009), as well as the fact that kinematic models on their own are not sufficient for USV motion modeling, particularly when USVs

exhibit significant side-slip (Gadre et al., 2012). For a more comprehensive history of USV dynamic model development, readers are encouraged to refer to Do & Pan (2009); Fossen (1994, 2002, 2011).

In order to better facilitate control design, existing research assumes that: 1) USVs are moving in a horizontal plane in the ideal fluid; 2) USV masses are uniformly distributed; 3) the body-fixed coordinate axis coincides with the center of gravity (CG); 4) both the CG and the center of buoyancy (CB) point vertically along the Z-axis; 5) USVs own the port-starboard symmetry; and 6) surge and sway-yaw dynamics are essentially decoupled. Based on these assumptions, the widely used dynamic model can then be obtained (Fossen, 1994):

$$\mathbf{M}\dot{\mathbf{v}} + \mathbf{C}(\mathbf{v})\mathbf{v} + \mathbf{D}(\mathbf{v})\mathbf{v} + \mathbf{g}(\boldsymbol{\eta}) = \boldsymbol{\tau} + \boldsymbol{\tau}_E, \quad (3)$$

where the physical meanings of symbols in (3) are all outlined in Table 5, while the representation of each symbol is introduced as follows: $\mathbf{M} = \mathbf{M}_{RB} + \mathbf{M}_A = \begin{bmatrix} m_{11} & 0 & 0 \\ 0 & m_{22} & m_{23} \\ 0 & m_{32} & m_{33} \end{bmatrix}$, $\mathbf{M}_{RB} =$

$$\begin{bmatrix} m & 0 & 0 \\ 0 & m & m\chi_g \\ 0 & m\chi_g & I_z \end{bmatrix}, \mathbf{M}_A = \begin{bmatrix} -X_u & 0 & 0 \\ 0 & -Y_v & -Y_r \\ 0 & -N_v & -N_r \end{bmatrix}, \mathbf{D}(\mathbf{v}) = \mathbf{D} + \mathbf{D}_n(\mathbf{v}) = \begin{bmatrix} d_{11}(u) & 0 & 0 \\ 0 & d_{22}(v, r) & d_{23}(v, r) \\ 0 & d_{32}(v, r) & d_{33}(v, r) \end{bmatrix}, \mathbf{D} = \begin{bmatrix} -X_u & 0 & 0 \\ 0 & -Y_v & -Y_r \\ 0 & -N_v & -N_r \end{bmatrix}, \mathbf{D}_n(\mathbf{v}) = \begin{bmatrix} -X_{|u|}|u| & 0 & 0 \\ 0 & -Y_{|v|}|v| - Y_{|r|}|r| & -Y_{|v|}|v| - Y_{|r|}|r| \\ 0 & -N_{|v|}|v| - N_{|r|}|r| & -N_{|v|}|v| - N_{|r|}|r| \end{bmatrix}, \mathbf{C}(\mathbf{v}) = \mathbf{C}_{RB}(\mathbf{v}) + \mathbf{C}_A(\mathbf{v}) = \begin{bmatrix} 0 & 0 & -m_{22}v - \frac{1}{2}(m_{23} + m_{32})r \\ 0 & 0 & m_{11}u \\ m_{22}v + \frac{1}{2}(m_{23} + m_{32})r & -m_{11}u & 0 \end{bmatrix}, \mathbf{C}_A(\mathbf{v}) = - \begin{bmatrix} 0 & 0 & -Y_v v - \frac{1}{2}(Y_r + N_v)r \\ 0 & 0 & X_u u \\ Y_v v + \frac{1}{2}(Y_r + N_v)r & -X_u u & 0 \end{bmatrix}, \mathbf{C}_{RB}(\mathbf{v}) = \begin{bmatrix} 0 & 0 & -m(\chi_g r + v) \\ 0 & 0 & mu \\ m(\chi_g r + v) & -mu & 0 \end{bmatrix}, \text{ where the parameters are all}$$

introduced in Table 5. With regard to other hydrodynamic coefficients (hydrodynamic derivatives), they can be referred to Do & Pan (2009); Fossen (1994).

5.1.3. Model Simplification

Although a more accurate and complete USV model that represents the physics of the real world is normally required, some common model simplifications and reductions are still inevitable in order to facilitate controller design. This phenomena is primarily due to the many practical challenges faced USV development, including hydrodynamic phenomenon (hydrodynamic forces and moments), which are still not fully understood. A unified numerical model for USV control is usually difficult, expensive and time-consuming to establish due to the need for highly specialized equipment and facilities, not to mention the many inherent and external nonlinear influences (Skjetne et al., 2004a). The following list provides an overview of these model simplifications and reductions:

1. *Fore/aft symmetry*: The off-diagonal entries and couplings

Table 5: Nomenclature of USV parameters

Symbols	Explanation
\mathbf{M}	System inertia matrix (including added mass)
\mathbf{M}_{RB}	Rigid-body system inertia matrix
\mathbf{M}_A	Added mass (forces and moments induced by the pressure from a forced harmonic motion of the USV body)
$\mathbf{C}(\mathbf{v})$	Coriolis and centripetal matrix (including added mass)
$\mathbf{C}_{RB}(\mathbf{v})$	Rigid-body Coriolis and centripetal matrix
$\mathbf{C}_A(\mathbf{v})$	Hydrodynamic Coriolis and centripetal matrix
\mathbf{D}	Linear damping matrix
$\mathbf{D}(\mathbf{v})$	Hydrodynamic damping matrix induced by skin friction, potential damping (due to the energy carried away by waves), vortex shedding damping, and wave drift damping
$\mathbf{D}_n(\mathbf{v})$	Nonlinear damping matrix
$\mathbf{g}(\boldsymbol{\eta})$	Restoring forces and moments due to gravitation/buoyancy
$\boldsymbol{\tau}$	Control inputs (the forces and moments of propulsion system and control surfaces) acting on USV $\boldsymbol{\tau} = [\tau_u, \tau_v, \tau_r]^T$ is for fully-actuated USV, while $\boldsymbol{\tau} = [\tau_u, 0, \tau_r]^T$ is for underactuated USV
τ_u	Control inputs (forces) in surge direction
τ_v	Control inputs (forces) in sway direction
τ_r	Control inputs (moments) in yaw direction
$\boldsymbol{\tau}_E$	Environmental disturbances (winds, waves and currents)
m	Mass of USV
I_z	USV inertia about the Z axis of body-fixed frame
χ_g	USV CG along the X coordinate of body-fixed frame

in \mathbf{M} and $\mathbf{D}(\mathbf{v})$ can thereby be eliminated based on this assumption (Do et al., 2002a; Dong & Guo, 2005; Behal et al., 2002; Jiang, 2002; Lefeber et al., 2003; Ma, 2009; Mazenc et al., 2002; Pettersen & Nijmeijer, 2001; Pettersen et al., 2004). It follows $\mathbf{M} = \text{diag}\{m_{11}, m_{22}, m_{33}\}$ and $\mathbf{D}(\mathbf{v}) = \text{diag}\{-X_u, -Y_v, -N_r\}$;

2. *Low and constant surge speed*: In some papers (Pettersen & Fossen, 2000; Pettersen et al., 2004), the USV is assumed to be at rest or only moving with low speed. This means that $\mathbf{C}(\mathbf{v})$ is negligible and the off-diagonal terms of \mathbf{M} and $\mathbf{D}(\mathbf{v})$ can therefore also be omitted since they are small in comparison with the diagonal terms;
3. *Dynamic positioning and mooring*: With these assumptions, both $\mathbf{D}_n(\mathbf{v})$ and $\mathbf{C}(\mathbf{v})$ can be disregarded (Fossen & Grovlen, 1998; Fossen & Strand, 1999; Robertsson & Johansson, 1998);
4. *The coincident center of added mass and gravity*: In this case, N_v can be replaced by Y_r , then the added mass $\mathbf{M}_A = \mathbf{M}_A^T$ and $\mathbf{C}_A(\mathbf{v}) = -\mathbf{C}_A^T(\mathbf{v})$ (Borhaug et al., 2011; Fredriksen & Pettersen, 2006; Kyrkjebø et al., 2007; Skjetne et al., 2004a, 2005; Wøndergem et al., 2011);
5. *Calm environments*: Under this assumption, the environmental disturbances $\boldsymbol{\tau}_E$ can be neglected (Do et al., 2002a; Dong & Guo, 2005; Behal et al., 2002; Jiang, 2002; Lefeber et al., 2003; Ma, 2009; Mazenc et al., 2002); In addition, it is possible to assume that the hydrodynamic coefficients are time-invariant, resulting in the parameters in matrices \mathbf{M} , $\mathbf{D}(\mathbf{v})$, and $\mathbf{C}(\mathbf{v})$ all being constant (Li & Sun, 2012; Skjetne et al., 2005).

5.1.4. Model Identification

Model identification plays a key role in obtaining a reasonable USV model. As reported in the literature, USV model identification typically constitutes off-line and on-line identification methods.

Table 6: Classification of the research in USV control techniques

Applications	References
Set-point regulation	Abril et al. (1997); Annamalai & Motwani (2013); Annamalai et al. (2014a); Beck et al. (2009); Caccia et al. (2005); Desa et al. (2007); Ding et al. (2013); Fredriksen & Pettersen (2006); Hurban (2012); Kim et al. (2012); Li et al. (2008); Mazenc et al. (2002); Moreira et al. (2007); Peng et al. (2009, 2013a); Pereira et al. (2008); Pettersen & Fossen (2000); Pettersen et al. (2004); Reyhanoglu (1997); Sharma & Sutton (2013); Tokekar et al. (2010); Tran et al. (2014); Vaneck (1997)
Trajectory tracking	Ashrafiuon et al. (2008); Breivik et al. (2008); Dai et al. (2012); Do et al. (2002a,b, 2003); Do (2010); Feemster & Esposito (2011); Gadre et al. (2012); Ghommam et al. (2006, 2010); Guerreiro et al. (2013); Jiang (2002); Kyrkjebø et al. (2007); Liu et al. (2014c); McNinch et al. (2009); Naem et al. (2012a); Pan et al. (2013); Pettersen & Nijmeijer (2001); Song (2014); Sonnenburg & Woolsey (2012, 2013); Tee & Ge (2006); Svec et al. (2014b); Yang et al. (2014); Yu et al. (2012); Zhang et al. (2011a)
Path following	Alfaro et al. (2005); Annamalai et al. (2014b); Bibuli et al. (2009, 2012); Caccia et al. (2008a); Do & Pan (2006a,b); Elkaim (2006); Li et al. (2009); Li & Sun (2012); Liu et al. (2014b); Naem et al. (2012b); Oh & Sun (2010); Skjetne et al. (2004a); Woudergem et al. (2011); Yu et al. (2008)
Path maneuvering	Arrichiello et al. (2006); Fossen (2005); Ma (2009); Skjetne et al. (2005)

1. *Off-line identification*: A USV model is generally calculated and identified off-line based on the data collected from onboard sensors through extensive trial-by-trial experiments. The existing off-line identification methods can be roughly grouped into: 1) frequency domain methods (Selvam et al., 2005); and 2) time domain methods, including least squares regression (Mivskovic et al., 2011; Sonnenburg et al., 2010), onboard sensor-based identification (Caccia et al., 2008b), continuous time models (Muske et al., 2008a), hybrid-extended Kalman filtering (Yoon & Rhee, 2003), and artificial neural network (Rajesh & Bhat-tacharyya, 2008).
2. *On-line identification*: In this research field, black/gray-box identification techniques are widely employed to learn and construct USV dynamics on-line. These methods include recursive neural networks (Sharma & Sutton, 2012), neural network feedback-feedforward compensating methods (Zhang et al., 2011a), and weighted least square techniques (Annamalai et al., 2014b).

5.2. Review of Control Approaches from Control Objectives Viewpoint

In essence, the development of control strategies is oriented by different control objectives. As briefly summarized in Table 6, these objectives can be generally classified into one of four categories (Bibuli et al., 2012; Fredriksen & Pettersen, 2006; Fossen, 2011):

1. *Set-point regulation*: This is the most basic control objective, which converges the position and orientation of the USV with the desired requirements without temporal constraint. However, it is impossible to achieve continuous control actions for underactuated USVs.

2. *Trajectory tracking*: The USV is driven to track a desired temporal reference, while simultaneously obeying predefined spatial constraints. For fully-actuated USVs, this problem is now reasonably understood, though it is still an active research topic for underactuated USVs (which exhibit nonholonomic constraints).
3. *Path following*: The USV is required to follow a scheduled path by independently tracking an expected forward speed profile and steering its orientation. Compared with trajectory tracking, a smoother path and lower probability of actuator saturation can be achieved due to the fact that spatial constraints are given priority over the temporal constraints.
4. *Path maneuvering*: As a subset of path following, path maneuvering (Skjetne, 2005) involves two tasks. The first geometric task, enabling the USV to follow a feasible desired path under maneuverability constraints, while the second is dynamic task, requiring the USV to satisfy some additional dynamic behaviors (such as time, speed, and acceleration assignment) along the desired path. In this case, the spatial specification (the first task) is considered to be more important than the temporal constraint (the second task).

5.3. Review of Control Approaches from a Practical Perspective

USVs may diverge from the predefined path due not only to poor controller design, but also because of environmental disturbances, uncertainties (unmodelled dynamics and parameters), actuator saturation, strong couplings, underactuation, and system faults (faults of sensors, actuators and communication links). Despite this, much of the literature focuses only on USV control without consideration of the above-mentioned factors. Control design for such nonlinear systems remains a challenging issue. For the sake of space, Table 7 briefly identifies current researches that consider the above-mentioned challenges. It is noteworthy that no prior attempt has been made to compile an exhaustive list since large amount of published literature in this direction.

Within the published literature, control design approaches fall into either one of the following methods, or some combination thereof: adaptive control (AC), backstepping control (BC), behavior-based control (BBC), cascaded control theory (CCT), cluster space control (CSC), decentralized synchronization (DS), dynamic surface control (DSC), fuzzy logic control (FLC), feedback linearization (FL), gradient-based adaptive technique (GBAT), gain scheduling (GS), input-output linearization (IOL), moving long base line (MLBL), linear quadratic regulator (LQR), linear quadratic Gaussian (LQG), Lyapunov's direct method (LDM), long base line positioning (LPLP), Lagrangian multiplier method (LMM), linear parameter varying (LPV), local control network (LCN), model reference adaptive control (MRAC), model predictive control (MPC), nonlinear model predictive control (NMPC), neural network (NN), null-space-based behavioral control (NSBBC), proportional integral derivative (PID), robust control (RC), reinforcement learning (RL), synchronization control (SC), slid-

Table 7: Classification of challenges in USV control systems

Exper.	Dist.	Uncer.	Faults	Const.	References
√	√	√	×	√	Annamalai et al. (2014a,b); Do & Pan (2006b); Feemster & Esposito (2011); Li et al. (2009); Tee & Ge (2006)
√	√	√	×	×	Bibuli et al. (2012); Caccia et al. (2008a); Naeem et al. (2012b); Pettersen et al. (2004)
√	√	×	√	×	Naeem et al. (2008b)
√	√	×	×	√	Ding et al. (2013); Gadre et al. (2012); Guerreiro et al. (2013); Kyrkjebø et al. (2007); Li & Sun (2012); Sonnenburg & Woolsey (2013); Tokekar et al. (2010)
√	√	×	×	×	Abril et al. (1997); Alfaro et al. (2005); Annamalai & Motwani (2013); Beck et al. (2009); Bibuli et al. (2009); Do & Pan (2006a); Hurban (2012); Kim et al. (2012); Lefeber et al. (2003); Ma (2009); Naeem et al. (2012a); Pereira et al. (2008); Pettersen & Fossen (2000); Sonnenburg & Woolsey (2012); Vaneck (1997); Wondergem et al. (2011); Yu et al. (2008)
√	×	×	×	√	Skjetne et al. (2005)
√	×	×	×	×	Adamek et al. (2015); Ashrafiuon et al. (2008); Breivik et al. (2008); Caccia et al. (2005); Desa et al. (2007); Elkaim (2006); Moreira et al. (2007); Pettersen & Nijmeijer (2001); Sharma et al. (2012); Skjetne et al. (2004a); Song (2014); Tran et al. (2014); Svec et al. (2014b)
×	√	√	×	×	Dai et al. (2012); Li et al. (2008); Liu et al. (2014b); Pan et al. (2013); Peng et al. (2009, 2013b); Zhang et al. (2011a)
×	√	×	×	√	Peng et al. (2013a); Sharma & Sutton (2013)
×	√	×	×	×	Do et al. (2002b, 2003); Do (2010); Ghommam et al. (2006, 2010); Liu et al. (2014c); Chen & Cheng (2010); Yang et al. (2014)
×	×	√	×	×	Annamalai et al. (2014a)
×	×	×	×	√	McNinch et al. (2009); Oh & Sun (2010); Yu et al. (2012)

Note: (√) considered; (×) not considered; (Exper.) experiment; (Dist.) disturbances; (Uncer.) uncertainties; (Const.) constraints.

ing mode control (SMC), and vision-based control (VBC). In practical applications, hardly any USV control methods rely on a single control design technique, since a combination of different control approaches and structures is often more appropriate for improving system performance. Although great effort has been dedicated to the development of more advanced control methodologies, PID control still dominates USV control system design. In the following, more advanced control methodologies that are expected to overcome the above-mentioned challenges are discussed in order to provide an overview of the new trends on USVs control.

5.3.1. Control of Underactuated USVs

With the exception of the fully-actuated USVs adopted in Feemster & Esposito (2011); Svec et al. (2014b); Tee & Ge (2006); Wondergem et al. (2011), most existing USVs are underactuated due mostly to the higher costs and impracticality of full actuation. In fact, most commonly used USVs are usually configured by mounting either two independent aft thrusters (Ashrafiuon et al., 2008; Caccia et al., 2008a; Majohr & Buch, 2006; Sharma et al., 2014) or one main aft thruster and one rudder (Breivik et al., 2008; Sonnenburg & Woolsey, 2013). This configuration produces only two distinct inputs (propulsion force and yaw moment), while the USV is moving in an environment with three DOF. As indicated by the Brockett necessary condition (Brockett, 1983), even if an underactuated system is open-loop controllable, it cannot be stabilized by any time-invariant continuous state feedback control methods. Additionally, it is impossible to straightforwardly apply the classical control techniques designed for fully- or over-actuated systems on the underactuated ones due to its nonholonomic constraints (Do & Pan, 2009).

5.3.2. USV Control under Actuator and State Constraints

As the bridge between control commands and physical actions in the system, each physical actuator is potentially subject

to saturation. Control design without any actuator amplitude and rate constraints may induce significant performance degradation in the control system, wear and tear to the actuators, and even the instability of the closed-loop system when actuators saturate (Do & Pan, 2009). In addition, the abrupt turn of USVs should likewise be avoided in terms of the possibility of undesirable motion, or even capsizing in extremely fast turns.

Table 8: Classification of USV control methods considering actuator deflection constraint (ADC), actuator deflection rate constraint (ADRC), and yaw rate constraint (YRC)

ADC	ADRC	YRC	Methods	References
√	√	√	MPC	Li & Sun (2012)
√	√	√	NMPC	Guerreiro et al. (2013)
√	√	×	AC	Feemster & Esposito (2011)
√	√	×	BC	Gadre et al. (2012); Tee & Ge (2006)
√	√	×	MPC	Annamalai et al. (2014a,b); Oh & Sun (2010)
√	√	×	NMPC	Sharma & Sutton (2013)
√	×	×	BC	Do & Pan (2006b); Li et al. (2009)
√	×	×	AC	Skjetne et al. (2005)

Note: (√) considered; (×) not considered.

Most of the existing work (Ding et al., 2013; Feemster & Esposito, 2011; Gadre et al., 2012; Kyrkjebø et al., 2007; Li et al., 2009; Sharma & Sutton, 2013; Skjetne et al., 2005; Sonnenburg & Woolsey, 2013; Tee & Ge, 2006) only introduces amplitude/rate limiters in the control system without consideration of the dynamics of the actuators and system states. To overcome these issues, there is a surge of interest (as summarized in Table 8) in integrating the actuator and state saturation effect into control design to increase the practical applicability of USVs (Annamalai et al., 2014a; Annamalai & Motwani, 2013; Annamalai et al., 2014b; Do & Pan, 2006b; Guerreiro et al., 2013; Peng et al., 2013a).

Table 9: Classification of USV control methods with consideration of environmental disturbances

Method	References
AC & KF	Peng et al. (2009)
AC & integrator	Feemster & Esposito (2011)
L_1 AC	Hurban (2012)
MRAC	Hurban (2012)
LDM & BC	Do et al. (2002b)
BC	Do et al. (2003); Gadre et al. (2012); Ghommam et al. (2006, 2010); Kyrkjebø et al. (2007); Li et al. (2008); Sonnenburg & Woolsey (2012, 2013)
BC & integrator	Do & Pan (2006b); Li et al. (2009)
Vectorial BC	Yang et al. (2014)
BC & observer	Do (2010); Tee & Ge (2006)
BC & NN	Peng et al. (2013b)
LQR	Lefeber et al. (2003)
LQG	Annamalai & Motwani (2013)
MPC	Annamalai & Motwani (2013); Annamalai et al. (2014a,b); Li & Sun (2012)
NMPC	Guerreiro et al. (2013); Sharma & Sutton (2013)
PID	Beck et al. (2009); Hurban (2012); Naeem et al. (2012a); Pereira et al. (2008); Wondergem et al. (2011)
PID & RL	Kim et al. (2012)
GS-PI	Caccia et al. (2008a); Bibuli et al. (2009, 2012)
H_2/H_∞	Yu et al. (2008)
FLC	Abril et al. (1997); Vaneck (1997)
NN	Dai et al. (2012); Peng et al. (2013a); Pan et al. (2013); Zhang et al. (2011a)
FLC & NN	Chen & Cheng (2010)
SMC	Alfaro et al. (2005); Liu et al. (2014b,c)
SMC & AC	Ding et al. (2013)

5.3.3. Control of USV in the Presence of Environmental Disturbances

USV control applications are inevitably influenced by environmental disturbances from winds, waves, and currents, while the small-scale USV in particular are more sensitive to environmental disturbances owing to their low inertia and small size. Despite this, most of the existing research imposes disturbances into the USV control system for control robustness assessment with little consideration of disturbance compensating mechanisms (as shown in Table 9). There are two dominant approaches for counteracting environmental disturbances: 1) model-based control techniques, where an adaptive control law is commonly derived to estimate and attenuate disturbances (Dai et al., 2012; Ding et al., 2013; Do, 2010; Ghommam et al., 2010; Kim et al., 2012; Li & Sun, 2012; Peng et al., 2009, 2013a; Yang et al., 2014); and 2) approximation-based control methods, where disturbances are usually mitigated by adopting an extra integral action (Caccia et al., 2008a; Do et al., 2002b, 2003; Do & Pan, 2006b; Feemster & Esposito, 2011; Gadre et al., 2012; Hurban, 2012; Li et al., 2009; Pan et al., 2013; Pereira et al., 2008; Pettersen & Fossen, 2000; Tee & Ge, 2006).

On the one hand, the approximation-based method does not provide any deep insight into USV dynamics with environmental disturbances. Besides this, a steady-state error can also be produced when the desired heading rate is a function of the reference yaw angle, or when the USV moves in a complicated and rough environment (Bibuli et al., 2009). However, this method is capable of guaranteeing the local stability, and a simpler controller suitable for practical implementation can also be obtained. On the other hand, the model-based control approach

Table 10: Classification of USV control methods considering uncertainties

Methodology	References
AC & KF	Peng et al. (2009)
AC & integrator	Feemster & Esposito (2011)
BC	Pettersen et al. (2004)
BC & high-gain observer	Tee & Ge (2006)
BC & integrator	Do & Pan (2006b); Li et al. (2009)
BC & NN	Peng et al. (2013b)
GS-PI	Caccia et al. (2008a); Bibuli et al. (2012)
MPC	Annamalai et al. (2014a,b)
Fuzzy LQG	Naeem et al. (2012b)
NN	Dai et al. (2012); Peng et al. (2013a,b); Pan et al. (2013); Zhang et al. (2011a)
SMC	Liu et al. (2014b); McNinch et al. (2009); Yu et al. (2012)

normally requires a precise system model which is both generally difficult and costly to obtain, and is sensitive to model uncertainties.

5.3.4. Control of USVs under Uncertainties

Real world applications of USVs will inevitably encounter a variety of unpredictable and immeasurable conditions, such as sensor uncertainties, unmodelled dynamics, and mass variation (Annamalai et al., 2014b). The presence of such uncertainties can cause high-frequency unmodelled dynamics, which consequently affect the performance of model-based controllers, and can even result in close-loop instability. Despite this, system dynamics and parameters are usually assumed to be explicitly known in controller design since it is usually difficult and costly to obtain accurate system parameters. The limited existing research that considers such uncertainties is briefly outlined in Table 10.

5.3.5. Fault Detection, Diagnosis, and Tolerant Control of USVs

Issues of fault detection and diagnosis (FDD), and fault tolerant Control (FTC) in USVs (Zhang & Jiang, 2008) have attracted increasing attention in a wide range of research communities. Conventional feedback control design methodologies for USVs may cause undesirable performance, and even instability in the presence of sensors, actuators, communications or other components malfunctions (Zhang & Jiang, 2008). This is particularly critical for high speed USVs moving in complicated and hazardous waters since a minor failure in a system component or unacceptable delay in reaction may lead to disastrous consequences for the USVs and their surrounding personnel, vehicles and facilities. Thus, there is a strong demand for more advanced USV control systems that possess the ability to simultaneously tolerate potential system faults, and guarantee the reliability and safety of the system with graceful performance degradation.

Such demand has resulted in the preliminary study of FDD in USVs by one group from Plymouth University. Sensor FDD has been investigated by using a modified fuzzy logic adaptive federated Kalman filter (FLA-FKF)-based multi-sensor data fusion (MSDF) (Xu et al., 2006; Naeem et al., 2008b). Interested readers can refer to their website for more information (Anonymous, 2014b).

Table 11: Classification of USV control methods with experimental validation

Test Sites	Methodology	References	
Indoor	CCT	Ma (2009)	
	FL	Moreira et al. (2007)	
	AC	Skjetne et al. (2004a, 2005)	
	Fuzzy PID	Tran et al. (2014)	
	BC	Kyrkjebø et al. (2007); Li et al. (2009); Pettersen et al. (2004); Tee & Ge (2006)	
	LQR	Lefeber et al. (2003)	
	SMC	Alfaro et al. (2005); Ashrafiuon et al. (2008)	
	PID	Beck et al. (2009); Breivik et al. (2008); Caccia et al. (2005); Hurban (2012); Moreira et al. (2007); Naeem et al. (2012a); Pereira et al. (2008); Song (2014); Svec et al. (2014b); Wondergem et al. (2011)	
	GS-PI	Caccia et al. (2008a); Bibuli et al. (2009, 2012)	
	LCN & PID	Sharma et al. (2012)	
Outdoor	PID & RL	Kim et al. (2012)	
	L_1 AC	Hurban (2012)	
	CSC	Adamek et al. (2015)	
	MRAC	Hurban (2012)	
	BC	Do & Pan (2006a,b); Gadre et al. (2012); Sonnenburg & Woolsey (2012, 2013)	
	LQG	Annamalai & Motwani (2013); Elkaim (2006); Naeem et al. (2008b)	
	Fuzzy LQG	Naeem et al. (2012b)	
	FLC	Abril et al. (1997); Vaneck (1997)	
	MPC	Annamalai & Motwani (2013); Annamalai et al. (2014a,b)	
	NMPC	Guerreiro et al. (2013)	
	H_2/H_∞	Yu et al. (2008)	
	Outdoor & Indoor	PD	Desa et al. (2007)
	AC	Feemster & Esposito (2011)	

5.3.6. Experimental Validation of Control Methods

Experimental validation plays a vital role in bridging the gap between theory and practice. Due to the tremendous challenges associated with practical implementation, including algorithm development, de-bugging, and platform design and maintenance, researchers typically focus on implementing control algorithms in simulation studies rather than in real environments. Even though significant efforts have recently been made (as listed in Table 11), more practical control structures and design methods capable of dealing with the above-mentioned challenges, together with more effective application of research to practical uses remain an important topic for future research.

6. Key GNC Technologies for Multiple USVs and Other Unmanned Vehicles

In order to enhance USV robustness and reliability against system failures, improve mission performance, increase their spatiotemporal capacity, reduce operational costs, and optimize strategies for larger coverage of surveillance, communication, and measurement applications, current research goes well beyond single USV systems. As outlined in Table 12, much of the focus of recent USV research has shifted to cooperative control issues with applications to: 1) cooperation between USVs, including assets protection (Kitts et al., 2011; Mahacek et al., 2012; Raboin et al., 2014), surveillance and information sharing (Elkins et al., 2010), water surface objective capture and transport (Arrichiello et al., 2012), bathymetric sensing (Adamek et

al., 2015), environmental monitoring (Arrichiello et al., 2010), ship replenishment (Kyrkjebø et al., 2007); 2) cooperation with UAVs, including maritime domain awareness (Healey et al., 2007), emergency and disaster response and management (Lindemuth et al., 2011; Murphy et al., 2008), environmental monitoring (Pinto et al., 2013, 2014); and 3) cooperation with UUVs, including search and rescue (Murphy et al., 2011), exchanging information with UUVs (Morgado et al., 2012), providing UUVs with localization information (Fallon et al., 2010; Viegas et al., 2014) since GPS signals are not available in underwater environments. In terms of cooperative navigation, Viegas et al. (2015) provides interesting contributions for formations with time-varying topologies recently.

Table 12: Classification of cooperation of USVs and other diverse vehicles

Types	Objectives	Methodologies	References
USVs	Leader-follower formation	NN	Peng et al. (2011, 2012)
		NN & DSC	Peng et al. (2013a)
		SMC	Fahimi (2007b); Schoerling et al. (2010)
		Graph theory	Peng et al. (2013b)
		NSBBC	Arrichiello et al. (2010); Mahacek et al. (2009)
	Cooperative path following	NMPC	Fahimi (2007a)
		SC	Kyrkjebø et al. (2007)
		Fast marching	Liu & Bucknall (2015)
		PI-GS	Bibuli et al. (2012)
		Graph theory	Almeida et al. (2010, 2012); Ghommam & Mnif (2009)
	Cooperative trajectory tracking	NN & DSC	Hao et al. (2013)
		Passivity control	Ihle et al. (2007)
		DS	Borhaug et al. (2011)
		Graph theory	Dong (2010)
		CSC	Mahacek et al. (2012)
Formation keeping	BBC	Elkins et al. (2010)	
	LMM	Ihle et al. (2006a,b)	
	CSC	Kitts et al. (2011)	
	NSBBC	Arrichiello et al. (2006)	
	Graph theory	Dong & Farrell (2008)	
Target capture & transport	GBAT	Adamek et al. (2015)	
	IOL	Fahimi et al. (2005)	
	NSBBC	Arrichiello et al. (2012)	
Task allocation & planning	Contract-based control	Raboin et al. (2014)	
	Cooperative localization	BBC	Morgado et al. (2012)
		MLBL	Fallon et al. (2010)
LBLP		Viegas et al. (2014)	
USVs & UUVs	Cooperative sensing	BBC	Murphy et al. (2011)
		Cooperative landing	VBC
USVs & UAVs	Target tracking	Remote control	Murphy et al. (2008)
		VBC	Lindemuth et al. (2011); Pinto et al. (2013)
		Potential field	Healey et al. (2007)

Even though substantial effort has been devoted towards achieving successful cooperation strategies over the past decade, significant theoretical and practical challenges still exist:

1. *Disturbances and uncertainties*: the researches conducted in Arrichiello et al. (2006, 2012); Borhaug et al. (2011); Ghommam & Mnif (2009); Ihle et al. (2006a,b); Kitts et al. (2011); Viegas et al. (2014) have taken the influence of disturbances into account, while Almeida et al. (2010); Fahimi (2007a,b); Hao et al. (2013); Peng et al. (2011, 2012, 2013a,b); Schoerling et al. (2010) have considered both disturbances and uncertainties. Further research is possible on USVs cooperation under the influence of time-

varying disturbances, as well as both dynamic and parameter uncertainties;

2. *Communication limitations*: Information sharing over a communication network is fundamental for cooperation, particularly for decentralized cooperative control. It also brings about numerous challenges, including limited communication bandwidth, transmission noise, and communication delays, dropouts and failures. Only a few of these issues have been studied in any detail, including communication delays (Dong & Farrell, 2008; Dong, 2010; Ghommam & Mnif, 2009; Ihle et al., 2006a; Izadi et al., 2013) and dropouts (Ihle et al., 2007, 2006b; Raboin et al., 2014);
3. *Collision avoidance*: Enhancing the safety and autonomy of USVs requires consideration of obstacle avoidance functionality. Despite this, existing research has mostly considered the issue of collision avoidance between cooperating vehicles, while other environmental obstacles are commonly ignored. Cooperation with consideration of both vehicles and environmental obstacles to date can only be found in Arrichiello et al. (2010); Fahimi (2007a); Raboin et al. (2014); Tam & Bucknall (2013);
4. *Underway replenishment*: USVs underway replenishment operations, which involve a close coordination of several USVs that move in parallel to conduct cargo (such as fuel, munitions, food, and personnel) transfer tasks, can enable the accomplishment of extended term missions and avoid port time (Kyrkjebø, 2007). Much work concerning the control issues of ships underway replenishment are carried out, such as leader-follower coordinated synchronization scheme is designed in Kyrkjebø & Pettersen (2003); Kyrkjebø et al. (2007), later on, this method is experimentally verified in Wondergem (2004). Unfortunately, the hydrodynamic interaction effects occurring between the cooperation members are not considered in these investigations.
5. *Experimental validation*: Despite the recent activity in this area, most research is still limited to simulation, with only Adamek et al. (2015); Almeida et al. (2010); Arrichiello et al. (2010, 2012); Bibuli et al. (2012); Borhaug et al. (2011); Elkins et al. (2010); Fallon et al. (2010); Healey et al. (2007); Kitts et al. (2011); Kyrkjebø et al. (2007); Mahacek et al. (2009, 2012); Morgado et al. (2012); Murphy et al. (2008); Pinto et al. (2014); Schoerling et al. (2010); Tokekar et al. (2010) conducting actual field experiments. Field experiments with good performance still deserve further investigation.

7. Challenges and Future Directions

Although tremendous effort has been dedicated to make USVs more autonomous, there still exist significant challenges in their development. Numerous key technical issues must be solved to bring the autonomy up to the level required for more sophisticated and hazardous applications.

7.1. Autonomous GNC of Single USV

7.1.1. Guidance

1. *Path planning*:

- (a) *Global path planning*: Most existing global path planning methods are computationally time consuming, such as heuristic search algorithms (Kim et al., 2013; Zhuang et al., 2012; Svec & Gupta, 2011) and optimization methods (Larson et al., 2006; Naus & Waz, 2013). As such, they are usually inappropriate for real-time applications in rapidly changing dynamic environments;
- (b) *Local path planning*: Local path planning approaches, such as potential fields (Healey et al., 2007; Soltan et al., 2009), only guarantee local convergence, which may lead the USV to the trapped situation instead of global convergence;
- (c) *Hybrid path planning*: The combination of global and local path planning approaches offers an effective solution for USVs working in both static and dynamic environments, but little attention to date (Larson et al., 2006, 2007; Casalino et al., 2009; Svec et al., 2012) has been paid to this hybrid path planning method. The fully observable environment is normally assumed in the existing research, partially observable environment and more efficient and reliable searching methods are still demanded. In addition, the system transient performance and stability is also a concern when switching between different path planning strategies;
- (d) *Path planning under practical issues*: Environmental disturbances and uncertainties are inevitable in USV path planning (Svec et al., 2012). It is also dynamically infeasible to follow a path by operating USVs with infinite engine thrust, rudder deflection and rates, and turn rates and accelerations. Too little research (Bibuli et al., 2009; Gal, 2011b) has concerned these issues in their path planning approaches. Furthermore, discontinuous command inputs should be avoided, and actuator saturation induced by dramatic jumps in tracking error should also be prevented, since sufficiently smoothed trajectories can contribute to more gentle acceleration, less redundant operations, and less energy consumption;
- (e) *Sternward/backward motion planning*: It is occasionally necessary for USVs to exhibit sternward/backward motion to enhance their maneuverability, improve environmental adaptability, and avoid environmental hazards (Gadre et al., 2012; Sonnenburg & Woolsey, 2012). Current studies are still limited to low speed USVs.

Practical applications of hybrid path planning strategies combining global and local methods, along with consideration of other challenging issues such as USV dynamics, uncertainties, environmental disturbances, stationary and dynamical obstacles, computational issues and control objectives (spatiotemporal, energy, weather-optimal, danger level or mission), all deserve further investigation.

2. *Path replanning*: With the further development of USVs, more advanced collision avoidance capabilities are increasingly needed. Unfortunately, only the avoidance of static and semi-dynamic obstacles has been investigated, while the availability of more effective, accurate and reliable methodologies to avoid both static and dynamic obstacles are still of great interest for further investigation.

- (a) *Protocol-free case*: One potentially important area for research is developing the ability to effectively and reliably plan an optimal path in real-time, integrating nautical chart data, USV dynamics, and surrounding stationary and dynamical obstacles (both above- and underwater (Heidarsson & Sukhatme, 2011; Onunka et al., 2013));
- (b) *Protocol-based case*: Because COLREG regulations were originally devised as navigation rules for human operators to steer ships, the incorporation and implementation of this regulation in USV collision avoidance strategy presents a huge challenge (Benjamin et al., 2006; Lee et al., 2004), especially for the identification of lights, flags, and horns. Additionally, COLREGs regulation provides safe operation along with chattering behavior issues due to the uncertainties in situation awareness, which may cause frequent switches in COLREG constraints. Another area of ongoing improvement is the ability to consider both COLREG regulations and nautical chart data in path replanning.

7.1.2. Navigation

Although there have been some applications of current navigation technologies on USVs, long-range and real-time navigation needs further investigation.

1. *Sensing technologies*: Navigation of USVs in unknown, complicated, and cluttered environments normally requires effective sensing technologies and onboard data processing algorithms.
 - (a) *Radar*: Radar is currently the main choice for far-field obstacle detection (Ji et al., 2014). Despite this, it may still fail to detect small-size and popup objects at close range. Obstacle detection precision may also be decreased due to cumulative deviation (more serious due to the fast turning behavior of USVs), high waves, and water reflectivity;
 - (b) *Sonar*: Sonar is primarily applied for underwater obstacle detection and information perception (Onunka et al., 2013), but the gathered data is easily influenced by noises, especially at the near-surface. Additionally, automatic sonar image interpretation is also challenging. These issues demand sonar data processing methods that are more robust and intelligent than at present;
 - (c) *Vision sensors*: Although vision sensors are identified as potential candidates for active sensing methods in USV navigation, current research is limited to the use of visual sensors (Gal, 2011a; Huntsberger et al., 2011). Infrared sensors have not yet been applied in USV navigation. Common maritime phenomena, such as sea fog (blurs images), wave occlusions and continuously changing viewing angle and range (induces images vibration), variation of lighting and weather (disturbs detection laws), and reflections of obstacles and surroundings (causes false identification), may also seriously affect its performance. Further research to increase the reliability and effectiveness of vision sensors are needed;
 - (d) *Multi-modal sensing*: In order to compensate the weakness of single sensing application, the multi-modal sensing can be a suitable choice to proceed to ensure USVs as safe as possible (Elkins et al., 2010), while the real-time data processing and heterogeneity of the data sources are still challenging.
2. *State estimation*:
 - (a) *State estimation with conventional GPS-IMU*:
 - i. GPS and IMU are widely adopted for USV state estimation (Bibuli et al., 2009; Caccia et al., 2008a; Motwani et al., 2013), while state estimation results are inevitably affected by environmental noises, inherent errors, and the accumulative bias of sensors. An interesting research in terms of the estimation of accelerometer bias has been presented in Batista et al. (2011). Data fusion of multiple sensors in order to develop more accurate and reliable navigation schemes and obtain the desired information is worthy of further investigation (Xu et al., 2007; Sutton et al., 2011; Vasconcelos et al., 2011a);
 - ii. USVs occasionally operate in some special waters (such as under bridges or trees) with non-existent/ degraded GPS signal reception, or near targets (metal objects) with strong magnetic signatures which can disturb onboard sensors. In these situations, using only one method is insufficient for localization and attitude measurement. The currently adopted solution is to use active ranging sensors or vision sensors for state estimation (Xu et al., 2007; Naeem et al., 2012b);
 - iii. Since each individual sensor may suffer from failure (Zhang & Jiang, 2008), sensor (hardware) and analytical (software) redundancies are generally employed (Sutton et al., 2011). Furthermore, smart sensors with fault diagnosis capabilities can also be a potential solution to sensor failure.
 - (b) *State estimation based on other sensors*: Active (LIDAR, radar and sonar) and passive (vision sensors) ranging sensor-based methods can also be adopted in state estimation, in particular for the application of USV navigation with degraded/lost GPS signals. Current research on USV navigation using active and passive ranging sensors remains minimal.
 3. *Environment perception*:
 - (a) *Obstacle recognition*: One of the difficulties facing USV navigation is the recognition of surrounding obstacles without human intervention. Despite this, existing research in this area (Subramanian et al., 2006; Wolf et al., 2010) is still scarce, and the development of methods with higher detection rates are needed in future studies;
 - (b) *Varying environment effects*: The most challenging issue for USV real-time vision-based perception is the influence of widely varying environmental conditions (Ma et al., 2013), such as fog, lighting, rain, wave occlusions, sophisticated background, as well as variational view angle and range. In addition, the reflections of obstacles and surrounding environment may show up clearly and incorrectly be classified as obstacles. Thus, subsequent work to increase the reliability of vision-based methods

and remove image reflections are highly needed. Infrared and laser illumination are commonly suggested as the solution to these issues in other unmanned navigation fields, but their application in USVs is still minimal. Besides the above-mentioned issues, salt spray, winds, waves, currents, and tides also present significant challenges (image blurring and vibration). Although pioneering research on this has been conducted (Gal, 2011a), further investigation of the above-mentioned challenges are deserved.

4. *Situation awareness*: SA is crucial for enhancing USV navigation performance, but issues related to the SA of USVs (Wolf et al., 2010; Leedekerken et al., 2014) have not yet been extensively introduced, and USV SA performance still depends solely on human operators (the autonomy level is somehow low). Unlike UGV and UUV, USV SLAM has to take into account the information both above and below the waterline. Accurately fusing these two separate regions is challenging due to their different resolutions and levels of accuracy, as well as the tide-caused water-level variation (Murphy et al., 2008).

7.1.3. Control

USV control systems still have significant limitations in their current state of development, and many critical aspects must be clarified to fulfill the increasing demand for greater autonomy.

1. Modelling of USVs:

- (a) *Nonlinear modelling*: Most existing control methods usually depend on highly idealized dynamic models, using strict assumptions. There is a great demand for the development of control schemes based on a more general and precise dynamic model to cover a wider range of sea conditions;
 - i. Hydrodynamic coefficients are always time-varying, which cannot be accurately estimated in advance, while USVs generally do not have fore/aft symmetry. Because of these practical issues, the coupling interactions of velocity and acceleration in each DOF, Coriolis and Centripetal forces, and nonlinear viscous effects will become increasingly apparent and significant for steering USVs with high surge speeds (Skjetne et al., 2004a). Hence it is more reasonable and practical to consider both $C(\mathbf{v})$ and the off-diagonal terms in \mathbf{M} and $\mathbf{D}(\mathbf{v})$ to enhance controller performance (Borhaug et al., 2011; Do & Pan, 2006a; Pettersen & Nijmeijer, 2001; Wondergem et al., 2011);
 - ii. Although taking account of non-diagonal matrix elements is trivial for fully-actuated USVs, it remains challenging for underactuated USVs (Pettersen & Nijmeijer, 2001).
- (b) *High-speed USV control*: Coupling interactions, environmental disturbances, the influence of hydrodynamic damping, and measurement noises can all seriously degrade the performance of USVs in high-speed operational conditions (Pettersen et al., 2004). It is also difficult to conduct linear translations of surge and sway velocities. In contrast to the control design for low-speed USVs

(Skjetne et al., 2004a), more complete models and advanced control strategies are needed in high-speed situations;

- (c) *Model identification*: In the existing research, USV model is generally identified off-line (Sonnenburg et al., 2010; Rajesh & Bhattacharyya, 2008). Owing to the complexity of this practice and its benefits (Sharma & Sutton, 2012; Zhang et al., 2011a) (improved model accuracy and real-time model learning and updating), on-line identification is a potentially useful topic for further investigation.

2. Control of USVs:

- (a) *Control under environmental disturbances and uncertainties*: Due to the presence of uncertainties in model dynamics and parameters, as well as hard-to-predict time-varying environmental disturbances, the expected motion may be unachievable when the USV controller is designed using an ideal model assuming disturbance-free conditions. This adverse effect becomes particularly serious for low inertia and small size USVs operating in a priori unknown and cluttered environments (Thakur et al., 2012). Furthermore, the drawbacks of existing methods that reject environmental disturbances include: 1) sensitive reactions to high-frequency noises and disturbances, inducing the increase of wear and tear on actuator systems; 2) constant and slow time-varying disturbance assumptions are usually needed for controller design; and 3) it is still an open issue for an underactuated USV fully compensating disturbances in three DOF (Fredriksen & Pettersen, 2006). Therefore, designing a controller that is capable of rejecting time-varying disturbances without frequent and abrupt action of actuators is still worth further investigation;
- (b) *Control with consideration of state & actuator limits*: The limitations on amplitude and rate of states and actuators all need to be considered in controller design to avoid control performance degradation, and even system instability (Annamalai et al., 2014b; Do & Pan, 2006b). To avoid undesirable motion and excessive tear and wear on actuator systems, actuator actions should not be excessively sensitive to external disturbances, while control signals should also be continuous. It is noteworthy that MPC has recently been adopted for USV control, which can inherently incorporate the limitations of actuators and states into controller design (Li & Sun, 2012; Oh & Sun, 2010);
- (c) *Fault tolerant capability of USV control systems*: As the operational periods and ranges of USVs increase, the demand for more reliable systems also rises. The ability to detect, diagnose and tolerate malfunctions in the mechanical and electrical elements of USV systems, as well as reliably and safely operating USVs under a wide range of environmental conditions is an important area of concern (Elkins et al., 2010). The current solution consists of a combination of redundancy (multiple groups of identical system configuration) of electrical and mechanical components with advanced fault detection, diagnosis and re-configuration mechanisms (Zhang & Jiang, 2008), though such a strategy also significantly increases the costs of USV development and the complexity of USV control

(Manley, 1997). Although consideration has been given to detection and diagnosis of faults in USVs sensors (Xu et al., 2006; Naeem et al., 2008b), no effort has been made to apply fault detection and diagnosis techniques, or to develop FTC techniques to deal with failure in USVs actuators and communication systems. The significant development of FDD and FTC in USV control is definitely expected in the near future;

- (d) *Autonomous departure and docking*: In general, USVs are manually controlled until their position and velocity satisfy some specific requirements during their departure and docking. Autonomous, safe and robust self-docking (Breivik & Loberg, 2011) and undocking of USVs (Martins et al., 2007b) would be a tremendous advantage in terms of reducing personnel cost and extending USV working durations. Despite this, a significantly challenging technical issue arises due to the existence of continuous and unpredictable external disturbances (Kim et al., 2012). Research on this issue can only be found in Breivik & Loberg (2011); Dunbabin et al. (2008); Kim et al. (2012). Vision-based docking strategies are one technique that has already been adopted (Dunbabin et al., 2008; Kim et al., 2012);
- (e) *Coupling influences among each motion*: Some motions coupled in reality, including the roll moment generated by disturbances, thrusters and rudders, can affect turning performance. The sway force induced by the deflection of the rudder may further complicate the control design (Fredriksen & Pettersen, 2006; Ma, 2009);
- (f) *Control reallocation* (Johansen et al., 2005; Johansen & Fossen, 2013): For over-actuated USVs (the feasibility of control reallocation depends on over-actuation), optimally distributing control commands to different actuators offers numerous advantages, including reduced energy consumption and enhanced control capabilities. From an energy saving perspective, the active operation of rudders owns more potential advantages especially when USV is moving in the low surge speed maneuvering case (such as station-keeping, docking, and dynamic positioning) because the consumption of fuel and excessive wear and tear on the thrust system (it is much energy- and life- consuming in the case of frequent operation of thrust) could be relatively decreased by maneuvering a rudder servo compared to operating the thrust system (Lindgaard & Fossen, 2003; Johansen et al., 2008; Johansen, 2013). From the enhanced control capabilities viewpoint, the reconfiguration of control strategies can also significantly improve the system performance in the presence of actuator faults (Casavola & Garone, 2010; Cristofaro & Johansen, 2014) and operating condition variations. These adverse phenomena are mitigated by only reallocating the control signals without reconfiguring the control laws, which is particularly desirable for the model-based control methods. But the computationally fast control reallocation approaches considering time-varying operating conditions are still scarce (Casavola & Garone, 2010);
- (g) *Dynamic positioning (DP)* (Sørensen, 2011): Due to the

depletion of oil and gas resources in shallow waters and their significantly increasing demand from both industrial and civil consumptions in recent years, a growing number of marine surface structures have been dynamically positioned to harsher and more sophisticated environments for offshore exploration and exploitation of hydrocarbons (He et al., 2013). Most of the early DP systems are deployed subjecting to a certain limit of environmental conditions and relatively simple tasks. As the DP technology becomes more mature research efforts are gradually put into the existing challenges, such as the unpredictable and time-varying environmental disturbances from winds, wave and current (Chen et al., 2013; Du et al., 2013), system parametric uncertainties (Chen et al., 2013; Du et al., 2013), varying operational conditions (Nguyen et al., 2007), as well as sensor and actuator failures. The recent developed hybrid DP strategy (Nguyen et al., 2007) capable of dealing with varying environmental and operational conditions is an effective and promising method, which is worth further investigation. Although the stability of switching between strategies in hybrid DP has also been concerned (Nguyen et al., 2007), further research on the switching-induced chattering prevention is deserved. Additionally, the safety of DP operations is increasingly demanded. More research efforts are thereby expected to be dedicated into FDD of sensors as well as FDD and FTC of actuators (Fang & Blanke, 2011). For more references and further detailed information on the topic of DP, readers can refer to Fossen (2011); Sørensen (2011);

- (h) *Active control of offshore steel jacket platform*: Offshore steel jacket platforms, as one type of the marine vehicle platforms, play an increasingly important role in the oil and gas drilling, extraction, transportation, and storage (Terro et al., 1999). The ocean environment that the platforms located is normally sophisticated and harsh, and where they may be subject to a variety of dynamic forces from winds, wave, current, ice, and even earthquake, as well as suffer from the erosion of sea water and salt atmosphere (Sakthivel et al., 2015). In addition to that, the flexible and complicated structure of the offshore steel jacket platforms tends to cause self-excited hydrodynamic force and nonlinear responses, those issues may result in adverse consequences, such as the large deformations and vibration of platforms, fatigue damage, and risky working conditions. As a result, the safety and durability of the offshore steel jacket platforms have raised great concerns from the marine research community. Extensive efforts have been dedicated to this area, which can also be made use of in other marine vehicles research. The stabilization of the platform subject to wave-induced forces is investigated in Sarrafan et al. (2012); Zhang et al. (2013a); Zhang & Tang (2013b); Zhang et al. (2014b); Nourisola et al. (2015). The research of actuator time-delay has been reported in Zhang et al. (2011b); Zhang & Tang (2013b); Zhang et al. (2012, 2015). The parameter perturbations of the platform and the external disturbances have been considered in Zhang et al. (2013a, 2014b). Moreover, the ac-

tuator FTC problem in offshore steel jacket platforms has recently drawn increasing attention. But only partial loss of actuator effectiveness to date is studied in Sakthivel et al. (2015); Zhang et al. (2014a), while other kinds of sensor and actuator failures deserve further investigation.

7.2. Autonomous GNC of USVs and Other Vehicles

In order to achieve more efficient and effective missions, USVs usually cooperate with not only themselves, but also other similar vehicles, such as UUVs, UAVs, as well as manned air and surface vehicles. GNC aspects, however, can be more sophisticated.

7.2.1. GNC in Cooperative Systems

1. *Centralized vs. decentralized control*: Compared with centralized control, decentralized control techniques are more flexible, desirable, and generally reduce the structural requirements on communication network topologies (Borhaug et al., 2011). But they are also more challenging due to the communication constraints (noises, delays, dropouts and failures), obstacles, and uncertainties;
2. *Protocol-based cooperative control*: Because USVs are often forced to give way to larger and higher priority ships (such as cargo and passenger ships), multiple USVs in combination with multiple COLREGs rules and real-time computational capabilities is another significant research direction that merits consideration (Murray, 2007; Tam & Bucknall, 2013);
3. *Cooperation with safety requirements*: In order to increase USV autonomy and safety, further development of collision avoidance capabilities, especially those directed towards preventing inter-USVs collisions (Adamek et al., 2015; Mahacek et al., 2012; Viegas et al., 2014), as well as static and dynamic environmental objects is needed (Raboin et al., 2014; Tam & Bucknall, 2013);
4. *Cooperative control with fewer sensors*: Most existing cooperative control methods rely on velocity information by adopting velocity sensors (especially for leader-follower cases). Provided that the desired performance is satisfied, developing a cooperative control technique using only position measurements or estimates of velocity even without velocity sensors (using e.g. accelerometers) would be much preferred in practice, allowing decreases in both equipment cost and network burden (Peng et al., 2013a; Xiao et al., 2011, 2014);
5. *USV cooperation under abnormal conditions*: Influences from disturbances (Arrichiello et al., 2012; Viegas et al., 2014), uncertainties (Almeida et al., 2010; Schoerling et al., 2010), and communication limitations (Dong, 2010; Raboin et al., 2014) can all undermine individual USV performance, and ultimately affect USV cooperation. Moreover, it is important to consider the proper cooperative control of USVs even if some USVs experience sensor, actuator or communication failures. Due to the complex nature and underactuation characteristic of most USVs, the implementation of FTC in cooperative control systems of

multiple USVs has only just been investigated (Izadi et al., 2013), although many recent developments in UAVs and UGVs have been carried out (Chamseddine et al., 2012; Sharifi et al., 2014; Xu et al., 2014);

6. *Underway replenishment*: Ships underway replenishment operations are currently performed manually, demanding the superb seamanship to maintain the expected trajectories that provide joint motion suitable for the replenishment manipulation (Brown & Carlyle, 2008). Although much effort (Kyrkjebø et al., 2007) has been devoted to the investigation of ships underway replenishment, the relative work on USVs is still scarce. Moreover, when the cooperating ships move in close proximity, ships' maneuvering behavior becomes much susceptible to the hydrodynamic interaction effects between them, and which may cause strong and sudden attraction or repulsion effects between them and make it difficult to precisely perform the anticipated operation. This situation can be further developed into disastrous consequences (threatening the personnel safety or even collision) if the environmental loads between the involved ships are significant (Breivik, 2010). But most of the existing research assumes that the underway replenishment operations are conducted in calm water, while the hydrodynamic interaction loads (such as the added mass, damping, and wave diffraction force), waves, and winds for two ships involved in close-proximity maneuvers that are of great concern are normally ignored. Only few existing research (Fu & Haddad, 2003; McTaggart et al., 2008; Skjetne et al., 2009) takes into account part of these unfavorable effects. The manned/unmanned helicopter, as another promising application of underway replenishment, can also be employed for vertical replenishment of USVs that may be some distance away.

7.2.2. Cooperation of USVs and Other Unmanned/Manned Systems

1. *Cooperation with UUVs*: As GPS cannot be directly used in underwater environments, the navigation of UUVs generally depends solely on onboard sensors which inevitably experience error accumulation (Fallon et al., 2010). USVs with high maneuverability have been employed to overcome this obstacle, tracking UUVs and providing them with real-time accurate navigation information (Murphy et al., 2011);
2. *Cooperation with UAVs*: To increase their spatiotemporal capacity, USVs can potentially cooperate with UAVs to conduct specific missions, such as acting as landing, launching, refueling, and replenishment platforms for UAVs (Murphy et al., 2008);
3. *Cooperation with other manned vehicles*: To take advantages of each other, USVs and manned vehicles are occasionally required to cooperate to conduct specific missions. But no existing research up to date considers this topic.

8. Conclusions

In the near future, the development of fully autonomous USVs in highly dynamic maritime environments remains an open question, and there are numerous ongoing research works on this topic. This paper has presented a technical review and bibliographical list on historical and contemporary developments in USV GNC systems. The basic definitions of USVs system are given. The adopted methodologies for USV GNC are categorized and outlined. Some challenges and future directions have also been presented to facilitate the research progress of autonomous and practically applicable USVs.

References

- Abril, J., Salom, J., & Calvo, O. (1997). Fuzzy control of a sailboat. *International Journal of Approximate Reasoning*, 16(3), 359-375.
- Adamek, T., Kitts, C. A., & Mas, I. (2015). Gradient-based cluster space navigation for autonomous surface vessels. *IEEE/ASME Transactions on Mechatronics*, 20(2), 506-518.
- Alfaro-Cid, E., McGoekin, E. W., Murray-Smith, D. J., & Fossen, T. I. (2005). Genetic algorithms optimisation of decoupled sliding mode controllers: Simulated and real results. *Control Engineering Practice*, 13(6), 739-748.
- Almeida, J., Silvestre, C., & Pascoal, A. (2010). Cooperative control of multiple surface vessels in the presence of ocean currents and parametric model uncertainty. *International Journal of Robust and Nonlinear Control*, 20(14), 1549-1565.
- Almeida, J., Silvestre, C., & Pascoal, A. M. (2012). Cooperative control of multiple surface vessels with discrete-time periodic communications. *International Journal of Robust and Nonlinear Control*, 22(4), 398-419.
- Alves, J., Oliveira, P., Oliveira, R., Pascoal, A., Rufino, M., Sebastiao, L., & Silvestre, C. (2006). Vehicle and mission control of the Delfim autonomous surface craft. In *Proceedings of 14th IEEE Mediterranean Conference on Control and Automation* (pp. 1-6).
- Annamalai, A. & Motwani, A. (2013). *A comparison between LQG and MPC autopilots for inclusion in a navigation, guidance and control system*. MIDAS Technical Report: MIDAS.SMSE.2013.TR.00.
- Annamalai, A. S. K., Sutton, R., Yang, C., Culverhouse, P., & Sharma, S. (2014a). Innovative adaptive autopilot design for uninhabited surface vehicles. In *Proceedings of IET Irish Signals & Systems Conference and China-Ireland International Conference on Information and Communications Technologies* (pp. 158-163).
- Annamalai, A. S. K., Sutton, R., Yang, C., Culverhouse, P., & Sharma, S. (2014b). Robust adaptive control of an uninhabited surface vehicle. *Journal of Intelligent & Robotic Systems* (pp. 1-20).
- Arrichiello, F., Chiaverini, S., & Fossen, T. I. (2006). Formation control of marine surface vessels using the null-space-based behavioral control. In *Group Coordination and Cooperative Control* (pp. 1-19). Berlin, Heidelberg: Springer.
- Arrichiello, F., Das, J., Heidarsson, H., Pereira, A., Chiaverini, S., & Sukhatme, G. S. (2010). Multi-robot collaboration with range-limited communication: Experiments with two underactuated ASVs. In *Field and Service Robotics* (pp. 443-453). Berlin, Heidelberg: Springer.
- Arrichiello, F., Heidarsson, H. K., Chiaverini, S., & Sukhatme, G. S. (2012). Cooperative caging and transport using autonomous aquatic surface vehicles. *Intelligent Service Robotics*, 5(1), 73-87.
- Ashrafioun, H., Muske, K. R., McNinch, L. C., & Soltan, R. A. (2008). Sliding-mode tracking control of surface vessels. *IEEE Transactions on Industrial Electronics*, 55(11), 4004-4012.
- Anonymous. (2014a). <http://www.asvglobal.com/> (accessed on 21/08/2015).
- Anonymous. (2014b). <http://www.tech.plymouth.ac.uk/sme/springerusv/2011/Springer.html> (accessed on 21/08/2015).
- Batista, P., Silvestre, C., & Oliveira, P. (2011). On the observability of linear motion quantities in navigation systems. *Systems & Control Letters*, 60(2), 101-110.
- Beck, E., Kirkwood, W., Caress, D., Berk, T., Mahacek, P., Brashem, K., Acain, J., Reddy, V., Kitts, C., Skutnik, J., & Wheat, G. (2009). SeaWASP: A small waterplane area twin hull autonomous platform for shallow water mapping. *Marine Technology Society Journal*, 43(1), 6-12.
- Behal, A., Dawson, D. M., Dixon, W. E., & Fang, Y. (2002). Tracking and regulation control of an underactuated surface vessel with nonintegrable dynamics. *IEEE Transactions on Automatic Control*, 47(3), 495-500.
- Benjamin, M. R., & Curcio, J. A. (2004). COLREGs-based navigation of autonomous marine vehicles. In *Proceedings of IEEE/OES Autonomous Underwater Vehicles* (pp. 32-39).
- Benjamin, M. R., Leonard, J. J., Curcio, J. A., & Newman, P. M. (2006). A method for protocol-based collision avoidance between autonomous marine surface craft. *Journal of Field Robotics*, 23(5), 333-346.
- Bertaska, I. R., Alvarez, J., Sinisterra, A., von Ellenrieder, K., Dhanak, M., Shah, B., Švec, P., & Gupta, S. K. (2013). Experimental evaluation of approach behavior for autonomous surface vehicles. In *ASME 2013 Dynamic Systems and Control Conference* (pp. V002T32A003-V002T32A003). American Society of Mechanical Engineers.
- Bertram, V. (2008). Unmanned surface vehicles—A survey. In *Proceedings of Skibsteknisk Selskab*, Copenhagen, Denmark.
- Bibuli, M., Bruzzone, G., Caccia, M., & Lapierre, L. (2009). Path-following algorithms and experiments for an unmanned surface vehicle. *Journal of Field Robotics*, 26(8), 669-688.
- Bibuli, M., Caccia, M., Lapierre, L., & Bruzzone, G. (2012). Guidance of unmanned surface vehicles: Experiments in vehicle following. *IEEE Robotics & Automation Magazine*, 19(3), 92-102.
- Bingham, B., Kraus, N., Howe, B., Freitag, L., Ball, K., Koski, P., & Gallimore, E. (2012). Passive and active acoustics using an autonomous wave glider. *Journal of Field Robotics*, 29(6), 911-923.
- Børhaug, E., Pavlov, A., Panteley, E., & Pettersen, K. Y. (2011). Straight line path following for formations of underactuated marine surface vessels. *IEEE Transactions on Control Systems Technology*, 19(3), 493-506.
- Breivik, M., Hovstein, V. E., & Fossen, T. I. (2008). Straight-line target tracking for unmanned surface vehicles. *Modeling, Identification and Control*, 29(4), 131-149.
- Breivik, M. (2010). *Topics in guided motion control of marine vehicles*. PhD Thesis, Norwegian University of Science and Technology.
- Breivik, M., & Loberg, J. E. (2011, August). A virtual target-based underway docking procedure for unmanned surface vehicles. In *IFAC World Congress, Milan, Italy* (pp. 13630-13635).
- Bremer, R. H., Cleophas, P. L., Fitski, H. J., & Keus, D. (2007). *Unmanned surface and underwater vehicles* (No. TNO-DV-2006-A455). TNO Defence Security and Safety (Netherlands). DTIC Document.
- Brockett, R. W. (1983) Asymptotic stability and feedback stabilization. In *Differential Geometric Control Theory* (pp. 181-191). Birkhauser.
- Brown, G. G., & Carlyle, W. M. (2008). Optimizing the US Navy's combat logistics force. *Naval Research Logistics (NRL)*, 55(8), 800-810.
- Caccia, M., Bono, R., Bruzzone, G., Spirandelli, E., Veruggio, G., Stortini, A. M., & Capodaglio, G. (2005). Sampling sea surfaces with SESAMO: An autonomous craft for the study of sea-air interactions. *IEEE Robotics & Automation Magazine*, 12(3), 95-105.
- Caccia, M. (2006a). Modelling and identification of the Charlie2005 ASC. In *Proceedings of 14th Mediterranean Conference on Control and Automation* (pp. 1-6).
- Caccia, M. (2006b). Autonomous surface craft: Prototypes and basic research issues. In *Proceedings of 14th Mediterranean Conference on Control and Automation* (pp. 1-6).
- Caccia, M., Bibuli, M., Bono, R., Bruzzone, G., Bruzzone, G., & Spirandelli, E. (2007). Unmanned surface vehicle for coastal and protected waters applications: The Charlie project. *Marine Technology Society Journal*, 41(2), 62-71.
- Caccia, M., Bibuli, M., Bono, R., & Bruzzone, G. (2008a). Basic navigation, guidance and control of an unmanned surface vehicle. *Autonomous Robots*, 25(4), 349-365.
- Caccia, M., Bruzzone, G., & Bono, R. (2008b). A practical approach to modeling and identification of small autonomous surface craft. *IEEE Journal of Oceanic Engineering*, 33(2), 133-145.
- Campbell, S., Naem, W., & Irwin, G. W. (2012). A review on improving the autonomy of unmanned surface vehicles through intelligent collision avoidance manoeuvres. *Annual Reviews in Control*, 36(2), 267-283.
- Campbell, S., Abu-Tair, M., & Naem, W. (2013). An automatic COLREGs-compliant obstacle avoidance system for an unmanned surface vehicle. *Proceedings of the Institution of Mechanical Engineers, Part M: Journal of En-*

- gineering for the Maritime Environment*, 0(0), 1-14.
- Casalino, G., Turetta, A., & Simetti, E. (2009). A three-layered architecture for real time path planning and obstacle avoidance for surveillance USVs operating in harbour fields. *IEEE Conference on Oceans* (pp. 1-8).
- Casavola, A., & Garone, E. (2010). Fault-tolerant adaptive control allocation schemes for overactuated systems. *International journal of robust and nonlinear control*, 20(17), 1958-1980.
- Chamseddine, A., Zhang, Y. M., & Rabbath, C.-A. (2012). Trajectory planning and re-planning for fault tolerant formation flight control of quadrotor unmanned aerial vehicles. In *Proceedings of American Control Conference* (pp.3291-3296).
- Chen, S.-L., & Cheng, H. B. (2010). Modeling and simulation based on fuzzy neural network for unmanned surface vehicle. *Ship Science and Technology*, 32(11), 134-136.
- Chen, M., Ge, S. S., How, B. V. E., & Choo, Y. S. (2013). Robust adaptive position mooring control for marine vessels. *IEEE Transactions on Control Systems Technology*, 21(2), 395-409.
- Cristofaro, A., & Johansen, T. A. (2014). Fault tolerant control allocation using unknown input observers. *Automatica*, 50(7), 1891-1897.
- Curcio, J., Leonard, J., & Patrikalakis, A. (2005). SCOUT-A low cost autonomous surface platform for research in cooperative autonomy. In *Proceedings of MTS/IEEE International Conference on OCEANS* (pp. 725-729).
- Dai, S. L., Wang, C., & Luo, F. (2012). Identification and learning control of ocean surface ship using neural network. *IEEE Transactions on Industrial Informatics*, 8(4), 801-810.
- Desa, E., Maurya, P. K., Pereira, A., Pascoal, A. M., Prabhudesai, R. G., et al. (2007). A small autonomous surface vehicle for ocean color remote sensing. *IEEE Journal of Oceanic Engineering*, 32(2), 353-364.
- Ding, F., Wu, J., & Wang, Y. (2013). Stabilization of an underactuated surface vessel based on adaptive sliding mode and backstepping control. *Mathematical Problems in Engineering*, 2013, 1-5.
- Do, K. D., Jiang, Z. P., & Pan, J. (2002a). Underactuated ship global tracking under relaxed conditions. *IEEE Transactions on Automatic Control*, 47(9), 1529-1536.
- Do, K. D., Jiang, Z. P., & Pan, J. (2002b). Universal controllers for stabilization and tracking of underactuated ships. *Systems & Control Letters*, 47(4), 299-317.
- Do, K. D., Jiang, Z. P., & Pan, J. (2003). Robust global stabilization of underactuated ships on a linear course: State and output feedback. *International Journal of Control*, 76(1), 1-17.
- Do, K. D., & Pan, J. (2006a). Robust path-following of underactuated ships: Theory and experiments on a model ship. *Ocean Engineering*, 33(10), 1354-1372.
- Do, K. D., & Pan, J. (2006b). Underactuated ships follow smooth paths with integral actions and without velocity measurements for feedback: Theory and experiments. *IEEE Transactions on Control Systems Technology*, 14(2), 308-322.
- Do, K. D., & Pan, J. (2009). *Control of ships and underwater vehicles: design for underactuated and nonlinear marine systems*. Springer.
- Do, K. D. (2010). Practical control of underactuated ships. *Ocean Engineering*, 37(13), 1111-1119.
- Dong, W., & Guo, Y. (2005). Global time-varying stabilization of underactuated surface vessel. *IEEE Transactions on Automatic Control*, 50(6), 859-864.
- Dong, W., & Farrell, J. A. (2008). Formation control of multiple underactuated surface vessels. *IET Control Theory & Applications*, 2(12), 1077-1085.
- Dong, W. (2010). Cooperative control of underactuated surface vessels. *IET Control Theory & Applications*, 4(9), 1569-1580.
- Du, J., Yang, Y., Wang, D., & Guo, C. (2013). A robust adaptive neural networks controller for maritime dynamic positioning system. *Neurocomputing*, 110, 128-136.
- Dumbabin, M., Lang, B., & Wood, B. (2008). Vision-based docking using an autonomous surface vehicle. In *Proceedings of IEEE International Conference on Robotics and Automation* (pp. 26-32).
- Ebken, J., Bruch, M., & Lum, J. (2005). Applying unmanned ground vehicle technologies to unmanned surface vehicles. In *Defense and Security* (pp. 585-596). International Society for Optics and Photonics.
- El-Gaaly, T., Tomaszewski, C., Valada, A., Velagapudi, P., Kannan, B., & Scerri, P. (2013). Visual obstacle avoidance for autonomous watercraft using smartphones. In *Autonomous Robots and Multirobot Systems Workshop*.
- Elkaim, G. (2006). The Atlantis project: A GPS-guided wing-sailed autonomous catamaran. *Journal of Navigation*, 53(4), 237-247.
- Elkins, L., Sellers, D., & Monach, W. R. (2010). The autonomous maritime navigation (AMN) project: Field tests, autonomous and cooperative behaviors, data fusion, sensors, and vehicles. *Journal of Field Robotics*, 27(6), 790-818.
- Fahimi, F., Rineesh, S. S., & Nataraj, C. (2005). Formation control of underactuated robotic boats. In *ASME 2005 International Mechanical Engineering Congress and Exposition* (pp. 1607-1615). American Society of Mechanical Engineers.
- Fahimi, F. (2007a). Non-linear model predictive formation control for groups of autonomous surface vessels. *International Journal of Control*, 80(8), 1248-1259.
- Fahimi, F. (2007b). Sliding-mode formation control for underactuated surface vessels. *IEEE Transactions on Robotics*, 23(3), 617-622.
- Fallon, M. F., Papadopoulos, G., & Leonard, J. J. (2010). Cooperative AUV navigation using a single surface craft. In *Field and Service Robotics* (pp. 331-340). Berlin Heidelberg: Springer.
- Fang, S., & Blanke, M. (2011). Fault monitoring and fault recovery control for position-moored vessels. *International Journal of Applied Mathematics and Computer Science*, 21(3), 467-478.
- Feemster, M. G., & Esposito, J. M. (2011). Comprehensive framework for tracking control and thrust allocation for a highly overactuated autonomous surface vessel. *Journal of Field Robotics*, 28(1), 80-100.
- Ferreira, H., Martins, R., Marques, E., Pinto, J., Martins, A., Almeida, J., Sousa, J., & Silva, E. P. (2007). Swordfish: an autonomous surface vehicle for network centric operations. In *Proceedings of IEEE International Conference on Oceans* (pp. 1-6).
- Fossen, T. I. (1994). *Guidance and control of ocean vehicles* (Vol. 199, No. 4). New York: Wiley.
- Fossen, T. I., & Grovlen, A. (1998). Nonlinear output feedback control of dynamically positioned ships using vectorial observer backstepping. *IEEE Transactions on Control Systems Technology*, 6(1), 121-128.
- Fossen, T. I., & Strand, J. P. (1999). Passive nonlinear observer design for ships using Lyapunov methods: Full-scale experiments with a supply vessel. *Automatica*, 35(1), 3-16.
- Fossen, T. I. (2002). *Marine control systems: guidance, navigation, and control of ships, rigs and underwater vehicles*. Marine Cybernetics.
- Fossen, T. I. (2005). A nonlinear unified state-space model for ship maneuvering and control in a seaway. *International Journal of Bifurcation and Chaos*, 15(9), 2717-2746.
- Fossen, T. I. (2011). *Handbook of marine craft hydrodynamics and motion control*. John Wiley & Sons.
- Fredriksen, E., & Pettersen, K. Y. (2006). Global κ -exponential way-point maneuvering of ships: Theory and experiments. *Automatica*, 42(4), 677-687.
- Fu, S. H. S., & Haddad, W. M. (2003). Nonlinear adaptive tracking of surface vessels with exogenous disturbances. *Asian Journal of Control*, 5(1), 88-103.
- Furfaro, T. C., Dusek, J. E., & Von Ellenrieder, K. D. (2009). Design, construction, and initial testing of an autonomous surface vehicle for riverine and coastal reconnaissance. In *Proceedings of MTS/IEEE International Conference on OCEANS, Biloxi-Marine Technology for Our Future: Global and Local Challenges* (pp. 1-6).
- Gadre, A. S., Sonnenburg, C., Du, S., Stilwell, D. J., & Woolsey, C. (2012). Guidance and control of an unmanned surface vehicle exhibiting sternward motion. In *Proceedings of IEEE International Conference on Oceans* (pp. 1-9).
- Gal, O. (2011a). Automatic obstacle detection for USVs navigation using vision sensors. In *Robotic Sailing* (pp. 127-140). Berlin Heidelberg: Springer.
- Gal, O. (2011b). Unified approach of unmanned surface vehicle navigation in presence of waves. *Journal of Robotics* (Vol.2011). Hindawi Publishing Corporation.
- Gal, O., & Zeitouni, E. (2013). Tracking objects using PHD filter for USV autonomous capabilities. In *Robotic Sailing 2012* (pp. 3-12). Berlin Heidelberg: Springer.
- Ghommam, J., Mnif, F., Benali, A., & Derbel, N. (2006). Asymptotic backstepping stabilization of an underactuated surface vessel. *IEEE Transactions on Control Systems Technology*, 14(6), 1150-1157.
- Ghommam, J., & Mnif, F. (2009). Coordinated path-following control for a group of underactuated surface vessels. *IEEE Transactions on Industrial Electronics*, 56(10), 3951-3963.
- Ghommam, J., Mnif, F., & Derbel, N. (2010). Global stabilisation and tracking control of underactuated surface vessels. *IET Control Theory & Applications*

- tions, 4(1), 71-88.
- Gomes, P., Silvestre, C., Pascoal, A., & Cunha, R. (2006). A path-following controller for the DELFIMx autonomous surface craft. In *Proceedings of the 7th IFAC Manoeuvring and Control of Marine Craft, Lisbon, Portugal*.
- Goudey, C. A., Consi, T., Manley, J., Graham, M., Donovan, B., & Kiley, L. (1998). A robotic boat for autonomous fish tracking. *Marine Technology Society Journal*, 32(1), 47-53.
- Guerreiro, B. J., Silvestre, C., Cunha, R., & Pascoal, A. (2013). Trajectory tracking nonlinear model predictive control for autonomous surface craft. In *Proceedings of IEEE European Control Conference* (pp. 3006-3011).
- Wang, H., Wang, D., Peng, Z. H., & Wang, W. (2013). Adaptive dynamic surface control for cooperative path following of underactuated marine surface vehicles via fast learning. *IET Control Theory & Applications*, 7(15), 1888-1898.
- He, W., Ge, S. S., How, B. V. E., & Choo, Y. S. (2014). *Dynamics and control of mechanical systems in offshore engineering*. London: Springer.
- Healey, A. J., Horner, D. P., Kragelund, S. P., Wring, B., & Monarrez, A. (2007). *Collaborative unmanned systems for maritime and port security operations*. Naval Postgraduate School Monterey CA Center for Autonomous Underwater Vehicle Research. DTIC Document.
- Heidarsson, H. K., & Sukhatme, G. (2011). Obstacle detection and avoidance for an autonomous surface vehicle using a profiling sonar. In *Proceedings of IEEE International Conference on Robotics and Automation* (pp. 731-736).
- Huntsberger, T., Aghazarian, H., Howard, A., & Trotz, D. C. (2011). Stereo visionbased navigation for autonomous surface vessels. *Journal of Field Robotics*, 28(1), 3-18.
- Hurban, M. A. (2012). *Adaptive speed controller for the SeaFox autonomous surface vessel*. Naval Postgraduate School Monterey CA. DTIC Document.
- Ihle, I. A., Jouffroy, J., & Fossen, T. I. (2006a). Formation control of marine surface craft: A Lagrangian approach. *IEEE Journal of Oceanic Engineering*, 31(4), 922-934.
- Ihle, I. A., Jouffroy, J., & Fossen, T. I. (2006b). Robust formation control of marine craft using lagrange multipliers. In *Group coordination and cooperative control* (pp. 113-129). Berlin Heidelberg: Springer.
- Ihle, I. A. F., Arcak, M., & Fossen, T. I. (2007). Passivity-based designs for synchronized path-following. *Automatica*, 43(9), 1508-1518.
- Izadi, H. A., Gordon, B. W., & Zhang, Y. M. (2013). Hierarchical decentralized receding horizon control of multiple vehicles with communication failure. *IEEE Transaction on Aerospace and Electronic Systems*, 49(2), 744-759.
- Ji, X., Zhuang, J. Y., & Su, Y. M. (2014). Marine radar target detection for USV. In *Advanced Materials Research* (Vol. 1006, pp. 863-869).
- Jiang, Z. P. (2002). Global tracking control of underactuated ships by Lyapunov's direct method. *Automatica*, 38(2), 301-309.
- Johansen, T. A., Fossen, T. I., & Tndel, P. (2005). Efficient optimal constrained control allocation via multiparametric programming. *Journal of Guidance, Control, and Dynamics*, 28(3), 506-515.
- Johansen, T. A., Fuglseth, T. P., Tndel, P., & Fossen, T. I. (2008). Optimal constrained control allocation in marine surface vessels with rudders. *Control Engineering Practice*, 16(4), 457-464.
- Johansen, T. A. (2013). Fuel optimal thrust allocation in dynamic positioning. *Control Applications in Marine Systems*, 9(1), 43-48.
- Johansen, T. A., & Fossen, T. I. (2013). Control allocation survey. *Automatica*, 49(5), 1087-1103.
- Kendoul, F. (2012). Survey of advances in guidance, navigation, and control of unmanned rotorcraft systems. *Journal of Field Robotics*, 29(2), 315-378.
- Khare, N., & Singh, P. (2012). Modeling and optimization of a hybrid power system for an unmanned surface vehicle. *Journal of Power Sources*, 198, 368-377.
- Khatib, O. (1986). Real-time obstacle avoidance for manipulators and mobile robots. *The International Journal of Robotics Research*, 5(1), 90-98.
- Kiencke, U., Nielsen, L., Sutton, R., Schilling, K., Papageorgiou, M., & Asama, H. (2006). The impact of automatic control on recent developments in transportation and vehicle systems. *Annual Reviews in Control*, 30(1), 81-89.
- Kim, Y. H., Lee, S. W., Yang, H. S., & Shell, D. A. (2012). Toward autonomous robotic containment booms: Visual servoing for robust inter-vehicle docking of surface vehicles. *Intelligent Service Robotics*, 5(1), 1-18.
- Kim, H., Park, B., & Myung, H. (2013). Curvature path planning with high resolution graph for unmanned surface vehicle. In *Robot Intelligence Technology and Applications 2012* (pp. 147-154). Berlin Heidelberg: Springer.
- Kim, H., Kim, D., Shin, J. U., Kim, H., & Myung, H. (2014). Angular rate-constrained path planning algorithm for unmanned surface vehicles. *Ocean Engineering*, 84, 37-44.
- Kitts, C., Mahacek, P., Adamek, T., & Mas, I. (2011). Experiments in the control and application of automated surface vessel fleets. In *Proceedings of IEEE International Conference on OCEANS* (pp. 1-7).
- Kucik, D. (2004). *U.S. Patent No. 6,712,312*. Washington, DC: U.S. Patent and Trademark Office.
- Kuwata, Y., Wolf, M. T., Zarzhitsky, D., & Huntsberger, T. L. (2014). Safe maritime autonomous navigation with COLREGs, using velocity obstacles. *IEEE Transaction on Journal of Oceanic Engineering*, 39(1), 110-119.
- Kyrkjebø, E., & Pettersen, K. Y. (2003). Ship replenishment using synchronization control. In *IFAC Conference on Manoeuvring and Control of Marine Craft* (286-291).
- Kyrkjebø, E. (2007). Motion coordination of mechanical systems: leader-follower synchronization of Euler-Lagrange systems using output feedback control. PhD Thesis, Norwegian University of Science and Technology.
- Kyrkjebø, E., Pettersen, K. Y., Wondergem, M., & Nijmeijer, H. (2007). Output synchronization control of ship replenishment operations: Theory and experiments. *Control Engineering Practice*, 15(6), 741-755.
- Larson, J., Bruch, M., & Ebken, J. (2006). Autonomous navigation and obstacle avoidance for unmanned surface vehicles. In *Defense and Security Symposium* (pp. 623007-623007). International Society for Optics and Photonics.
- Larson, J., Bruch, M., Halterman, R., Rogers, J., & Webster, R. (2007). *Advances in autonomous obstacle avoidance for unmanned surface vehicles*. Space and Naval Warfare Systems Center San Diego CA. DTIC Document.
- Lee, S. M., Kwon, K. Y., & Joh, J. (2004). A fuzzy logic for autonomous navigation of marine vehicles satisfying COLREG guidelines. *International Journal of Control, Automation and Systems*, 2, 171-181.
- Leedekerken, J. C., Fallon, M. F., & Leonard, J. J. (2014). Mapping complex marine environments with autonomous surface craft. In *Experimental Robotics* (pp. 525-539). Berlin Heidelberg: Springer.
- Lefeber, E., Pettersen, K. Y., & Nijmeijer, H. (2003). Tracking control of an underactuated ship. *IEEE Transactions on Control Systems Technology*, 11(1), 52-61.
- Li, J. H., Lee, P. M., Jun, B. H., & Lim, Y. K. (2008). Point-to-point navigation of underactuated ships. *Automatica*, 44(12), 3201-3205.
- Li, Z., Sun, J., & Oh, S. (2009). Design, analysis and experimental validation of a robust nonlinear path following controller for marine surface vessels. *Automatica*, 45(7), 1649-1658.
- Li, Z., & Sun, J. (2012). Disturbance compensating model predictive control with application to ship heading control. *IEEE Transactions on Control Systems Technology*, 20(1), 257-265.
- Lindgaard, K. P., & Fossen, T. I. (2003). Fuel-efficient rudder and propeller control allocation for marine craft: experiments with a model ship. *IEEE Transactions on Control Systems Technology*, 11(6), 850-862.
- Lindemuth, M., Murphy, R., Steimle, E., Armitage, W., Dreger, K., Elliot, T., Hall, M., Kalyadin, D., Kramer, J., Palankar, M., Pratt, K., & Griffin, C. (2011). Sea robot-assisted inspection. *IEEE Robotics & Automation Magazine*, 18(2), 96-107.
- Liu, K. K., & Wang, J. H. (2013). A method of detecting wave grade based on visual image taken by USV. *Applied Mechanics and Materials*, 291, 2437-2441.
- Liu, W., Motwani, A., Sharma, S., Sutton, R., & Bucknall, R. (2014a). *Fault tolerant navigation of USV using fuzzy multi-sensor fusion*. MIDAS Technical Report, MIDAS SMSE.2014.TR.010.
- Liu, C., Zou, Z. J., & Yin, J. C. (2014b). Path following and stabilization of underactuated surface vessels based on adaptive hierarchical sliding mode. *International Journal of Innovative Computing, Information and Control*, 10(3), 909-918.
- Liu, C., Zou, Z. J., & Hou, X. R. (2014c). Stabilization and tracking of underactuated surface vessels in random waves with fin based on adaptive hierarchical sliding mode technique. *Asian Journal of Control*, 16(5), 1492-1500.
- Liu, Y., & Bucknall, R. (2015). Path planning algorithm for unmanned surface vehicle formations in a practical maritime environment. *Ocean Engineering*, 97, 126-144.
- Ma, B. L. (2009). Global κ -exponential asymptotic stabilization of underactuated surface vessels. *Systems & Control Letters*, 58(3), 194-201.
- Ma, Z., Wen, J., & Liang, X. (2013). Video image clarity algorithm research of USV visual system under the sea fog. In *Advances in Swarm Intelligence* (pp. 436-444). Berlin Heidelberg: Springer.
- Mahacek, P. (2005). *Dynamic analysis of a SWATH vessel*. Monterey Bay Aquarium Research Institute's Internship Report, 1-13.

- Mahacek, P., Mas, I., Petrovic, O., Acain, J., & Kitts, C. (2009). Cluster space control of autonomous surface vessels. *Marine Technology Society Journal*, 43(1), 13-20.
- Mahacek, P., Kitts, C. A., & Mas, I. (2012). Dynamic guarding of marine assets through cluster control of automated surface vessel fleets. *IEEE/ASME Transactions on Mechatronics*, 17(1), 65-75.
- Majohr, J., & Buch, T. (2006). Modelling, simulation and control of an autonomous surface marine vehicle for surveying applications Measuring Dolphin MESSIN. *IEE Control Engineering Series*, 69, 329-352.
- Manley, J. E. (1997). Development of the autonomous surface craft "ACES". In *Proceedings of MTS/IEEE Conference on OCEANS* (Vol. 2, pp. 827-832).
- Manley, J. E., Marsh, A., Cornforth, W., & Wiseman, C. (2000). Evolution of the autonomous surface craft AutoCat. In *Proceedings of MTS/IEEE Conference and Exhibition on Oceans* (Vol. 1, pp. 403-408).
- Manley, J. E. (2008). Unmanned surface vehicles, 15 years of development. In *Proceedings of IEEE International Conference on OCEANS* (pp. 1-4).
- Martins, A., Ferreira, H., Almeida, C., Silva, H., Almeida, J. M., & Silva, E. (2007a). ROAZ and ROAZ II autonomous surface vehicle design and implementation. In *International Lifesaving Congress*.
- Martins, A., Almeida, J. M., Ferreira, H., Silva, H., Dias, N., Dias, A., Almeida, C., & Silva, E. P. (2007b). Autonomous surface vehicle docking manoeuvre with visual information. In *Proceedings of IEEE International Conference on Robotics and Automation* (pp. 4994-4999).
- Mazenc, F., Pettersen, K., & Nijmeijer, H. (2002). Global uniform asymptotic stabilization of an underactuated surface vessel. *IEEE Transactions on Automatic Control*, 47(10), 1759-1762.
- McNinch, L., Ashrafioun, H., & Muske, K. (2009). Optimal specification of sliding mode control parameters for unmanned surface vessel systems. In *Proceedings of the 2009 American Control Conference* (pp. 2350-2355).
- McTaggart, K., Cumming, D., Hsiung, C. C., & Li, L. (2003). Seakeeping of two ships in close proximity. *Ocean Engineering*, 30(8), 1051-1063.
- Mišković, N., Vukić, Z., Bibuli, M., Bruzzone, G., & Caccia, M. (2011). Fast in-field identification of unmanned marine vehicles. *Journal of Field Robotics*, 28(1), 101-120.
- Moreira, L., Fossen, T. I., & Guedes Soares, C. (2007). Path following control system for a tanker ship model. *Ocean Engineering*, 34(14), 2074-2085.
- Morgado, M., Batista, P., Oliveira, P., & Silvestre, C. (2012). Attitude estimation for intervention-AUVs working in tandem with autonomous surface craft. *European Journal of Control*, 18(5), 485-495.
- Motwani, A. (2012). *A survey of uninhabited surface vehicles*. MIDAS Technical Report: MIDAS. SMSE. 2012. TR. 001.
- Motwani, A., Sharma, S. K., Sutton, R., & Culverhouse, P. (2013). Interval Kalman filtering in navigation system design for an uninhabited surface vehicle. *Journal of Navigation*, 66(5), 639-652.
- Murphy, R. R., Steimle, E., Griffin, C., Cullins, C., Hall, M., & Pratt, K. (2008). Cooperative use of unmanned sea surface and micro aerial vehicles at Hurricane Wilma. *Journal of Field Robotics*, 25(3), 164-180.
- Murphy, R. R., Steimle, E., Hall, M., Lindemuth, M., Trejo, D., Hurlbaeus, S., Medina-Cetina, Z., & Slocum, D. (2011). Robot-assisted bridge inspection. *Journal of Intelligent & Robotic Systems*, 64(1), 77-95.
- Murray, R. M. (2007). Recent research in cooperative control of multivehicle systems. *Journal of Dynamic Systems, Measurement, and Control*, 129(5), 571-583.
- Murray, J. (2008). *Sentry—An unmanned swimmer intercept system*. QinetiQ North America Inc Woburn Ma Technology Solutions Group. DTIC Document.
- Muske, K. R., Ashrafioun, H., Haas, G., McCloskey, R., & Flynn, T. (2008a). Identification of a control oriented nonlinear dynamic USV model. In *Proceedings of 2008 American Control Conference* (pp. 562-567).
- Naem, W., Xu, T., Sutton, R., & Tian, A. (2008b). The design of a navigation, guidance, and control system for an unmanned surface vehicle for environmental monitoring. *Proceedings of the Institution of Mechanical Engineers, Part M: Journal of Engineering for the Maritime Environment*, 222(2), 67-79.
- Naem, W., Irwin, G. W., & Yang, A. (2012a). COLREGs-based collision avoidance strategies for unmanned surface vehicles. *Mechatronics*, 22(6), 669-678.
- Naem, W., Sutton, R., & Xu, T. (2012b). An integrated multi-sensor data fusion algorithm and autopilot implementation in an uninhabited surface craft. *Ocean Engineering*, 39, 43-52.
- Naus, K., & Waž, M. (2013). The idea of using the A* algorithm for route planning an unmanned vehicle "Edredo". *Scientific Journals Maritime University of Szczecin, Zeszyty Naukowe Akademia Morska w Szczecinie*.
- Navy, US (2007). *The navy unmanned surface vehicle (USV) master plan*. <http://www.navy.mil/navydata/technology/usvmppr.pdf>.
- Nguyen, T. D., Sørensen, A. J., & Quek, S. T. (2007). Design of hybrid controller for dynamic positioning from calm to extreme sea conditions. *Automatica*, 43(5), 768-785.
- Nourisola, H., Ahmadi, B., & Tavakoli, S. (2015). Delayed adaptive output feedback sliding mode control for offshore platforms subject to nonlinear wave-induced force. *Ocean Engineering*, 104, 1-9.
- Oh, S. R., & Sun, J. (2010). Path following of underactuated marine surface vessels using line-of-sight based model predictive control. *Ocean Engineering*, 37(2), 289-295.
- Onunka, C., & Nnadozie, R. C. (2013). Modelling the performance of USV manoeuvring and target tracking: An approach using frequency modulated continuous wave radar rotary system. *SpringerPlus*, 2(1), 1-9.
- Onunka, C., Bright, G., & Stopforth, R. (2013). Probabilistic uncertainty identification modelling in USV obstacle detection. *Journal of the South African Institution of Mechanical Engineering*, 29, 36-43.
- Pan, C. Z., Lai, X. Z., Yang, S. X., & Wu, M. (2013). An efficient neural network approach to tracking control of an autonomous surface vehicle with unknown dynamics. *Expert Systems with Applications*, 40(5), 1629-1635.
- Pascoal, A., Silvestre, C., & Oliveira, P. (2006). Vehicle and mission control of single and multiple autonomous marine robots. *IEE Control Engineering Series*, 69, 353.
- Pastore, T., & Djapic, V. (2010). Improving autonomy and control of autonomous surface vehicles in port protection and mine countermeasure scenarios. *Journal of Field Robotics*, 27(6), 903-914.
- Peng, Y., Han, J. D., & Huang, Q. J. (2009). Adaptive UKF based tracking control for unmanned trimaran vehicles. *International Journal of Innovative Computing, Information and Control*, 5(10), 3505-3516.
- Peng, Z., Wang, D., & Hu, X. (2011). Robust adaptive formation control of underactuated autonomous surface vehicles with uncertain dynamics. *IET Control Theory & Applications*, 5(12), 1378-1387.
- Peng, Z. H., Wang, D., Lan, W. Y., & Sun, G. (2012). Robust leader-follower formation tracking control of multiple underactuated surface vessels. *China Ocean Engineering*, 26, 521-534.
- Peng, Z., Wang, D., Chen, Z., Hu, X., & Lan, W. (2013a). Adaptive dynamic surface control for formations of autonomous surface vehicles with uncertain dynamics. *IEEE Transactions on Control Systems Technology*, 21(2), 513-520.
- Peng, Z., Wang, D., Li, T., & Wu, Z. (2013b). Leaderless and leader-follower cooperative control of multiple marine surface vehicles with unknown dynamics. *Nonlinear Dynamics*, 74(1-2), 95-106.
- Pereira, A., Das, J., & Sukhatme, G. (2008). An experimental study of station keeping on an underactuated ASV. In *Proceedings of IEEE/RSI International Conference on Intelligent Robots and Systems* (pp. 3164-3171).
- Pettersen, K. Y., & Fossen, T. I. (2000). Underactuated dynamic positioning of a ship-experimental results. *IEEE Transactions on Control Systems Technology*, 8(5), 856-863.
- Pettersen, K. Y., & Nijmeijer, H. (2001). Underactuated ship tracking control: Theory and experiments. *International Journal of Control*, 74(14), 1435-1446.
- Pettersen, K. Y., Mazenc, F., & Nijmeijer, H. (2004). Global uniform asymptotic stabilization of an underactuated surface vessel: Experimental results. *IEEE Transactions on Control Systems Technology*, 12(6), 891-903.
- Pinto, E., Santana, P., & Barata, J. (2013). On collaborative aerial and surface robots for environmental monitoring of water bodies. In *Technological Innovation for the Internet of Things* (pp. 183-191). Berlin Heidelberg: Springer.
- Pinto, E., Santana, P., Marques, F., Mendona, R., Loureno, A., & Barata, J. (2014). On the design of a robotic system composed of an unmanned surface vehicle and a piggybacked VTOL. In *Technological Innovation for Collective Awareness Systems* (pp. 193-200). Berlin Heidelberg: Springer.
- Raboin, E., Švec, P., Nau, D. S., & Gupta, S. K. (2014). Model-predictive asset guarding by team of autonomous surface vehicles in environment with civilian boats. *Autonomous Robots*, 1-22.
- Rajesh, G., & Bhattacharyya, S. K. (2008). System identification for nonlinear maneuvering of large tankers using artificial neural network. *Applied Ocean Research*, 30(4), 256-263.
- Rasal, K. (2013). *Navigation & control of an automated SWATH surface vessel for bathymetric mapping*. PhD Thesis, Santa Clara University.

- Reyhanoglu, M. (1997). Exponential stabilization of an underactuated autonomous surface vessel. *Automatica*, 33(12), 2249-2254.
- Roberts, G. N., & Sutton, R. (Eds.). (2006). *Advances in unmanned marine vehicles*. The Institution of Engineering and Technology.
- Robertsson, A., & Johansson, R. (1998). Comments on "Nonlinear output feedback control of dynamically positioned ships using vectorial observer backstepping". *IEEE Transactions on Control Systems Technology*, 6(3), 439-441.
- Sakthivel, R., Selvaraj, P., Mathiyalagan, K., & Park, J. H. (2015). Robust fault-tolerant H_∞ control for offshore steel jacket platforms via sampled-data approach. *Journal of the Franklin Institute*, 352(6), 2259-2279.
- Sarrafan, A., Zareh, S. H., Khayyat, A. A. A., & Zabihollah, A. (2012). Neuro-fuzzy control strategy for an offshore steel jacket platform subjected to wave-induced forces using magnetorheological dampers. *Journal of Mechanical Science and Technology*, 26(4), 1179-1196.
- Savitz, S., Blickstein, I., Buryk, P., Button, R. W., DeLuca, P., Dryden, J., Mastbaum, J., Osburg, J., Padilla, P., & Potter, A. (2013). *US navy employment options for unmanned surface vehicles (USVs)*. Rand National Defense Research Inst Santa Monica CA.
- Schoerling, D., Van Kleeck, C., Fahimi, F., Koch, C. R., Ams, A., & Lber, P. (2010). Experimental test of a robust formation controller for marine unmanned surface vessels. *Autonomous Robots*, 28(2), 213-230.
- Selvam, R. P., Bhattacharyya, S. K., & Haddara, M. (2005). A frequency domain system identification method for linear ship maneuvering. *International Shipbuilding Progress*, 52(1), 5-27.
- Shah, B. C., Svec, P., Bertaska, I. R., Klinger, W., Sinisterra, A. J., von Ellenrieder, K., Dhanak, M., & Gupta, S. K. (2014). Trajectory planning with adaptive control primitives for autonomous surface vehicles operating in congested civilian traffic. *IEEE/RSJ International Conference on Intelligent Robots and Systems* (pp. 2312-2318).
- Sharifi, F., Zhang, Y. M., & Aghdam, A. G. (2014). A distributed deployment strategy for multi-agent systems subject to health degradation and communication delays. *Journal of Intelligent and Robotic Systems*, 73(1-4), 623-633.
- Sharma, S. K., Naeem, W., & Sutton, R. (2012). An autopilot based on a local control network design for an unmanned surface vehicle. *Journal of Navigation*, 65(2), 281-301.
- Sharma, S. K., & Sutton, R. (2012). Modelling the yaw dynamics of an uninhabited surface vehicle for navigation and control systems design. *Journal of Marine Engineering and Technology*, 11(3), 9-20.
- Sharma, S. K., & Sutton, R. (2013). A genetic algorithm based nonlinear guidance and control system for an uninhabited surface vehicle. *Journal of Marine Engineering and Technology*, 12(2), 29-40.
- Sharma, S. K., Sutton, R., Motwani, A., & Annamalai, A. (2014). Non-linear control algorithms for an unmanned surface vehicle. *Proceedings of the Institution of Mechanical Engineers, Part M: Journal of Engineering for the Maritime Environment*, 228(2), 146-155.
- Skjetne, R., Smogeli, Ø. N., & Fossen, T. I. (2004a). A nonlinear ship manoeuvring model: Identification and adaptive control with experiments for a model ship. *Modeling, Identification and Control*, 25(1), 3-27.
- Skjetne, R., Fossen, T. I., & Kokotović, P. V. (2004b). Robust output maneuvering for a class of nonlinear systems. *Automatica*, 40(3), 373-383.
- Skjetne, R., Fossen, T. I., & Kokotović, P. V. (2005). Adaptive maneuvering, with experiments, for a model ship in a marine control laboratory. *Automatica*, 41(2), 289-298.
- Skjetne, R. (2005). *The maneuvering problem*. PhD Thesis, Norwegian University of Science and Technology.
- Skejjic, R., Breivik, M., Fossen, T. I., & Faltinsen, O. M. (2009). Modeling and control of underway replenishment operations in calm water. In *8th IFAC International Conference on Manoeuvring and Control of Marine Craft*, September 16-18, 2009. Elsevier IFAC Publications.
- Soltan, R. A., Ashrafioun, H., & Muske, K. R. (2009). Trajectory real-time obstacle avoidance for underactuated unmanned surface vessels. In *ASME 2009 International Design Engineering Technical Conferences and Computers and Information in Engineering Conference* (pp. 1059-1067). American Society of Mechanical Engineers.
- Soltan, R. A., Ashrafioun, H., & Muske, K. R. (2011). ODE-based obstacle avoidance and trajectory planning for unmanned surface vessels. *Robotica*, 29(5), 691-703.
- Song, R. (2014). *Path planning and bi-directional communication for unmanned surface vehicle*. MIDAS Technical Report, MIDAS MSE.2014.TR.011.
- Sonnenburg, C., Gadre, A., Horner, D., Kragelund, S., Marcus, A., Stilwell, D. J., & Woolsey, C. A. (2010). Control-oriented planar motion modeling of unmanned surface vehicles. In *Proceedings of IEEE International Conference on OCEANS* (pp. 1-10).
- Sonnenburg, C., & Woolsey, C. A. (2012). An experimental comparison of two USV trajectory tracking control laws. In *Proceedings of IEEE International Conference on OCEANS* (pp. 1-10).
- Sonnenburg, C. R. (2012). *Modeling, identification, and control of an unmanned surface vehicle*. PhD Thesis, Virginia Polytechnic Institute and State University.
- Sonnenburg, C. R., & Woolsey, C. A. (2013). Modeling, identification, and control of an unmanned surface vehicle. *Journal of Field Robotics*, 30(3), 371-398.
- Sørensen, A. J. (2011). A survey of dynamic positioning control systems. *Annual Reviews in Control*, 35(1), 123-136.
- Statheros, T., Howells, G., & Maier, K. M. (2008). Autonomous ship collision avoidance navigation concepts, technologies and techniques. *Journal of Navigation*, 61(1), 129-142.
- Subramanian, A., Gong, X., Riggins, J. N., Stilwell, D. J., & Wyatt, C. L. (2006). Shoreline mapping using an omni-directional camera for autonomous surface vehicle applications. In *Proceedings of IEEE International Conference on OCEANS* (pp. 1-6).
- Sutton, R., Sharma, S., & Xiao, T. (2011). Adaptive navigation systems for an unmanned surface vehicle. *Journal of Marine Engineering and Technology*, 10(3), 3-20.
- Svec, P., Schwartz, M., Thakur, A., & Gupta, S. K. (2011). Trajectory planning with look-ahead for unmanned sea surface vehicles to handle environmental disturbances. In *Proceedings of IEEE/RSJ International Conference on Intelligent Robots and Systems* (pp. 1154-1159).
- Svec, P., & Gupta, S. K. (2011). Automated planning logic synthesis for autonomous unmanned vehicles in competitive environments with deceptive adversaries. In *New Horizons in Evolutionary Robotics* (pp. 171-193). Berlin Heidelberg: Springer.
- Svec, P., & Gupta, S. K. (2012). Automated synthesis of action selection policies for unmanned vehicles operating in adverse environments. *Autonomous Robots*, 32(2), 149-164.
- Svec, P., Thakur, A., Shah, B. C., & Gupta, S. K. (2012, August). USV trajectory planning for time varying motion goals in an environment with obstacles. In *ASME 2012 International Design Engineering Technical Conferences and Computers and Information in Engineering Conference* (pp. 1297-1306). American Society of Mechanical Engineers.
- Svec, P., Shah, B. C., Bertaska, I. R., Alvarez, J., Sinisterra, A. J., von Ellenrieder, K., Dhanak, M., & Gupta, S. K. (2013). Dynamics-aware target following for an autonomous surface vehicle operating under COLREGs in civilian traffic. *IEEE/RSJ International Conference on Intelligent Robots and Systems* (pp. 3871-3878).
- Svec, P., Shah, B. C., Bertaska, I. R., Klinger, W., Sinisterra, A. J., von Ellenrieder, K., Dhanak, M., & Gupta, S. K. (2014a). Adaptive sampling based COLREGs-compliant obstacle avoidance for autonomous surface vehicles. *ICRA 2014 Workshop on Persistent Autonomy for Marine Robotics*.
- Svec, P., Thakur, A., Raboin, E., Shah, B. C., & Gupta, S. K. (2014b). Target following with motion prediction for unmanned surface vehicle operating in cluttered environments. *Autonomous Robots*, 36(4), 383-405.
- Tam, C., & Bucknall, R. (2013). Cooperative path planning algorithm for marine surface vessels. *Ocean Engineering*, 57, 25-33.
- Tee, K. P., & Ge, S. S. (2006). Control of fully actuated ocean surface vessels using a class of feedforward approximators. *IEEE Transactions on Control Systems Technology*, 14(4), 750-756.
- Terro, M. J., Mahmoud, M. S., & Abdel-Rohman, M. (1999). Multi-loop feedback control of offshore steel jacket platforms. *Computers & Structures*, 70(2), 185-202.
- Thakur, A., & Gupta, S. K. (2011). Real-time dynamics simulation of unmanned sea surface vehicle for virtual environments. *Journal of Computing and Information Science in Engineering*, 11(3), 031005.
- Thakur, A., Svec, P., & Gupta, S. K. (2012). GPU based generation of state transition models using simulations for unmanned surface vehicle trajectory planning. *Robotics and Autonomous Systems*, 60(12), 1457-1471.
- Tokekar, P., Bhadauria, D., Studenski, A., & Isler, V. (2010). A robotic system for monitoring carp in Minnesota lakes. *Journal of Field Robotics*, 27(6), 779-789.
- Tran, N. H., Choi, H. S., Baek, S. H., & Shin, H. Y. (2014). Tracking control

- of an unmanned surface vehicle. In *International Conference on Advanced Engineering Theory and Application: Recent Advances in Electrical Engineering and Related Sciences* (pp. 575-584). Berlin Heidelberg: Springer.
- Vaneck, T. W., Rodriguez-Ortiz, C. D., Schmidt, M. C., & Manley, J. E. (1996). Automated bathymetry using an autonomous surface craft. *Navigation*, 43(4), 407-417.
- Vaneck, T. W. (1997). Fuzzy guidance controller for an autonomous boat. *IEEE Control Systems Magazine*, 17(2), 43-51.
- Vasconcelos, J. F., Carreira, B., Silvestre, C., Oliveira, P., & Batista, P. (2011a). Discrete-time complementary filters for attitude and position estimation: Design, analysis and experimental validation. *IEEE Transactions on Control Systems Technology*, 19(1), 181-198.
- Vasconcelos, J. F., Silvestre, C., & Oliveira, P. (2011b). INS/GPS aided by frequency contents of vector observations with application to autonomous surface crafts. *IEEE Journal of Oceanic Engineering*, 36(2), 347-363.
- Viegas, D., Batista, P., Oliveira, P., & Silvestre, C. (2014). Position and velocity filters for ASC/I-AUV tandems based on single range measurements. *Journal of Intelligent & Robotic Systems*, 74(3-4), 745-768.
- Viegas, D., Batista, P., Oliveira, P., Silvestre, C., & Chen, C. P. (2015). Distributed state estimation for linear multi-agent systems with time-varying measurement topology. *Automatica*, 54, 72-79.
- Wolf, M. T., Assad, C., Kuwata, Y., Howard, A., Aghazarian, H., Zhu, D., ... & Huntsberger, T. (2010). 360-degree visual detection and target tracking on an autonomous surface vehicle. *Journal of Field Robotics*, 27(6), 819-833.
- Wongergem, M. (2004). Experimental results on synchronization control of ship rendezvous operations. In *IFAC Conference on Control Applications in Marine System* (pp. 453-458).
- Wongergem, M., Lefeber, E., Pettersen, K. Y., & Nijmeijer, H. (2011). Output feedback tracking of ships. *IEEE Transactions on Control Systems Technology*, 19(2), 442-448.
- Xiao, B., Hu, Q.-L., & Zhang, Y. M. (2011). Fault-tolerant attitude control for flexible spacecraft without angular velocity magnitude measurement. *Journal of Guidance, Control, and Dynamics*, 34(5), 1556-1561.
- Xiao, B., Hu, Q.-L., Zhang, Y. M., & Huo, X. (2014). Fault-tolerant tracking control of spacecraft with attitude-only measurement under actuator failures. *Journal of Guidance, Control, and Dynamics*, 37(3), 838-849.
- Xu, B., Stilwell, D. J., & Kurdila, A. J. (2013). Fast path re-planning based on fast marching and level sets. *Journal of Intelligent & Robotic Systems*, 71(3-4), 303-317.
- Xu, Q., Yang, H., Jiang, B., Zhou, D. H., & Zhang, Y. M. (2014). Fault tolerant formation control of UAVs subject to permanent and intermittent faults. *Journal of Intelligent and Robotic Systems*, 73(1-4), 589-602.
- Xu, T., Chudley, J., & Sutton, R. (2006). A fault tolerant multi-sensor navigation system for an unmanned surface vehicle. In *IFAC Symposium on Fault Detection, Supervision and Safety of Technical Processes*, 6(1), 1503-1508.
- Xu, T., Sutton, R., & Sharma, S. (2007). A multi-sensor data fusion navigation system for an unmanned surface vehicle. *Proceedings of the Institution of Mechanical Engineers, Part M: Journal of Engineering for the Maritime Environment*, 221(4), 167-182.
- Yan, R. J., Pang, S., Sun, H. B., & Pang, Y. J. (2010). Development and missions of unmanned surface vehicle. *Journal of Marine Science and Application*, 9(4), 451-457.
- Yakimenko, O., & Kragelund, S. (2011). Real-time optimal guidance and obstacle avoidance for UMVS. In *Autonomous Underwater Vehicles*. New York: InTech.
- Yang, W. R., Chen, C. Y., Hsu, C. M., Tseng, C. J., & Yang, W. C. (2011). Multifunctional inshore survey platform with unmanned surface vehicles. *International Journal of Automation and Smart Technology*, 1(2), 19-25.
- Yang, Y., Du, J., Liu, H., Guo, C., & Abraham, A. (2014). A trajectory tracking robust controller of surface vessels with disturbance uncertainties. *IEEE Transaction on Control Systems Technology*, 22(4), 1511-1518.
- Yoon, H. K., & Rhee, K. P. (2003). Identification of hydrodynamic coefficients in ship maneuvering equations of motion by estimation-before-modeling technique. *Ocean Engineering*, 30(18), 2379-2404.
- Yu, Z., Bao, X., & Nonami, K. (2008). Course keeping control of an autonomous boat using low cost sensors. *Journal of System Design and Dynamics*, 2(1), 389-400.
- Yu, R., Zhu, Q., Xia, G., & Liu, Z. (2012). Sliding mode tracking control of an underactuated surface vessel. *IET Control Theory & Applications*, 6(3), 461-466.
- Yuh, J., Marani, G., & Blidberg, D. R. (2011). Applications of marine robotic vehicles. *Intelligent Service Robotics*, 4(4), 221-231.
- Yu, X., & Zhang, Y. M. (2015). Sense and avoid technologies with applications to unmanned aircraft systems: review and prospects. *Progress in Aerospace Sciences*, 74, 152-166.
- Zhang, Y. M., & Jiang, J. (2008). Bibliographical review on reconfigurable fault-tolerant control systems. *Annual Reviews in Control*, 32(2), 229-252.
- Zhang, L. J., Jia, H. M., & Qi, X. (2011a). NNFFC-adaptive output feedback trajectory tracking control for a surface ship at high speed. *Ocean Engineering*, 38(13), 1430-1438.
- Zhang, X. M., Han, Q. L., & Han, D. (2011b). Effects of small time-delays on dynamic output feedback control of offshore steel jacket structures. *Journal of Sound and Vibration*, 330(16), 3883-3900.
- Zhuang, J. Y., Su, Y. M., Liao, Y. L., & Sun, H. B. (2011). Motion planning of USV based on marine rules. *Procedia Engineering*, 15, 269-276.
- Zhuang, J. Y., Su, Y. M., Liao, Y. L., & Sun, H. B. (2012). Unmanned surface vehicle local path planning based on marine radar. *Journal of Shanghai Jiaotong University*, 46(9), 1371-1375.
- Zhang, B. L., Hu, Y. H., & Tang, G. Y. (2012). Stabilization control for offshore steel jacket platforms with actuator time-delays. *Nonlinear Dynamics*, 70(2), 1593-1603.
- Zhang, B. L., Ma, L., & Han, Q. L. (2013a). Sliding mode H_∞ control for offshore steel jacket platforms subject to nonlinear self-excited wave force and external disturbance. *Nonlinear Analysis: Real World Applications*, 14(1), 163-178.
- Zhang, B. L., & Tang, G. Y. (2013b). Active vibration H_∞ control of offshore steel jacket platforms using delayed feedback. *Journal of Sound and Vibration*, 332(22), 5662-5677.
- Zhang, B. L., Feng, A. M., & Li, J. (2014a). Observer-based optimal fault-tolerant control for offshore platforms. *Computers & Electrical Engineering*, 40(7), 2204-2215.
- Zhang, B. L., Han, Q. L., Zhang, X. M., & Yu, X. (2014b). Sliding mode control with mixed current and delayed states for offshore steel jacket platforms. *IEEE Transactions on Control Systems Technology*, 22(5), 1769-1783.
- Zhang, B. L., Huang, Z. W., & Han, Q. L. (2015). Delayed non-fragile control for offshore steel jacket platforms. *Journal of Vibration and Control*, 21(5), 959-974.