

Constraint Cascading Style Sheets for the Web

Technical Report UW CSE 99-05-01
7 May 1999

Greg J. Badros

Dept. of Computer Science and Engineering
University of Washington, Box 352350
Seattle, WA 98195-2350, USA
gjb@cs.washington.edu

Alan Borning

Dept. of Computer Science and Engineering
University of Washington, Box 352350
Seattle, WA 98195-2350, USA
borning@cs.washington.edu

Kim Marriott

School of Computer Science and Software Engineering
Monash University
Clayton, Victoria 3168, Australia
marriott@cs.monash.edu.au

Peter Stuckey

Dept. of Computer Science and Software Engineering
University of Melbourne
Parkville, Victoria 3052, Australia
pjs@cs.mu.oz.au

ABSTRACT

Cascading style sheets have recently been introduced by W3C as a mechanism for controlling the appearance of HTML documents. In this paper, we demonstrate how constraints provide a powerful unifying formalism for declaratively understanding and specifying style sheets for web documents. With constraints we can naturally and declaratively specify complex behaviour such as inheritance of properties and cascading of conflicting style rules. We give a detailed description of a constraint-based style sheet model, CCSS, which is compatible with virtually all of the CSS 2.0 specification. It allows more flexible specification of layout, and also allows the designer to provide multiple layouts that better meet the desires of the viewer and environmental restrictions. We also describe a prototype extension of the Amaya browser that demonstrates the feasibility of CCSS.

KEYWORDS: Constraints, HTML, style sheets, CSS, cascading style sheets, World Wide Web, page layout, Cassowary

INTRODUCTION

Since the inception of the Web there has been tension between the “structuralists” and the “designers.” On one hand, structuralists believe that a Web document should consist only of the content itself and tags indicating the logical structure of the document, with the browser free to determine the document's appearance. On the other hand, designers (understandably) want to determine the exact appearance of the document rather than leaving it to the browser.

With W3C's recent championing of *style sheets*, this debate has resulted in a compromise. The web document proper should contain the content and structural tags, together with a link to one or more style sheets that determine how the document will be displayed. Thus, there is a clean separa-

tion between document structure and appearance, yet the designer has considerable control over the final appearance of the document. W3C has introduced *Cascading Style Sheets*, first CSS 1.0 and now CSS 2.0, for use with HTML documents.

Despite the clear benefits of cascading style sheets, there are a number of problems with the CSS 2.0 standard.

- The designer lacks control over the document's appearance in environments different from that of the designer. For example, if the document is displayed on a monochrome display, if fonts are not available, or if the browser window is sized differently, then the document's appearance will often be less than satisfactory.
- The CSS 2.0 specification has seemingly ad hoc restrictions on layout specification. For example, a document element's appearance can often be specified relative to the parent of the element, but generally not relative to other elements in the document.
- The CSS 2.0 specification is complex and sometimes vague. It relies on procedural descriptions to understand the effect of complex language features, such as table layout. This makes it difficult to understand how features interact.
- Browser support for CSS 2.0 is still limited. We conjecture that this is due in part to the complexity of the specification, but also because the specification does not suggest a unifying implementation mechanism.

We argue that constraint-based layout provides a solution to all of these issues, because constraints can be used to specify *declaratively* the desired layout of a web document. They allow partial specification of the layout, which can be combined with other partial specifications in a predictable way. They also provide a uniform mechanism for understanding layout and cascading. Finally, constraint solving technology provides a unifying implementation technique.

We describe a constraint-based extension to CSS 2.0, called *Constraint Cascading Style Sheets* (CCSS). The extension allows the designer to add arbitrary linear arithmetic constraints to the style sheet to control features such as object placement, and finite-domain constraints to control features such as font properties. Constraints may be given a strength, reflecting their relative importance. They may be used in style rules in which case rewritings of the constraint are created for each applicable element. Multiple style sheets are available for the same media with preconditions on the style sheets determining which is appropriate for a particular environment and viewer requirements.

Our main technical contributions are:

- A demonstration that constraints provide a powerful unifying formalism for declaratively understanding and specifying CSS 2.0. The most challenging aspects were how to handle inheritance of properties such as font-size (we use read-only variables) and cascading (we use constraint hierarchies).
- A detailed description of a constraint-based style sheet model, CCSS, which is compatible with virtually all of the CSS 2.0 specification. CCSS is a true extension of CSS 2.0. It allows more flexible specification of layout, and also allows the designer to provide multiple layouts that better meet the desires of the viewer and environmental restrictions.
- A prototype extension of the Amaya browser that demonstrates the feasibility of CCSS. The prototype makes use of the sophisticated constraint solving algorithm Cassowary [4] and a simple one-way binary acyclic finite-domain solver based on BAFSS [12].

BACKGROUND

Cascading style sheets (CSS 1.0 in 1997 and CSS 2.0 in 1998) were introduced by W3C in association with the HTML 4.0 standard. In this section we review relevant aspects of CSS 2.0 [6] and HTML 4.0 [9].

CSS 2.0 and HTML 4.0 provide a comprehensive set of “style” properties for each type of HTML tag. By setting the value of these properties the document author can specify how the browser will display that element. Broadly speaking, properties either specify how to position the element relative to other elements, e.g. `text-indent`, `margin`, or `float`, or how to display the element itself, e.g. `font-size` or `color`.

Although the author can directly annotate elements in the document with style properties, the intent is that the author places this information in a separate style sheet, and the original document either links to or imports the style sheet. Thus, the same document may be displayed using different style sheets and the same style sheet may be used for multiple documents, easing maintenance of a uniform look for a web site.

A style sheet consists of *rules*. A rule has a *selector* that specifies the document elements to which the rule applies,

```
<HTML> <HEAD>
  <TITLE>Simple Example</TITLE>
  <LINK REL="stylesheet"
        HREF="simple.css"
        TYPE="text/css"> </HEAD>
<BODY>
  <H1 ID=h>Boring Quotes</H1>
  <P ID=p> Stop reading this because
  <BLOCKQUOTE ID=q1>
    She said that
  <BLOCKQUOTE ID=q2>
    He said that
  </BLOCKQUOTE>
</BLOCKQUOTE>
</P>
</BODY>
</HTML>
```

Figure 1: Example HTML Document

and *declarations* that specify the stylistic effect of the rule. The declaration is a set of *property/value* pairs. Values may be either absolute or relative to the parent element's value.

For instance, the style sheet

```
H1 { font-size: 13pt }
P { font-size: 11pt }
BLOCKQUOTE { font-size: 90% }
```

Figure 2: `simple.css`

has three rules. The first uses the selector `H1` to indicate that it applies to all elements with tag `H1` and specifies that they should be displayed using a 13 pt font. The second rule specifies that paragraph elements should use an 11 pt font. The third rule specifies the appearance of text in a `BLOCKQUOTE`, specifying that the font-size should be 90% of that of the surrounding element.

We can use this style sheet to specify the appearance of the HTML document shown in Figure 1. Notice the link to the style sheet and that we have included an `ID` attribute for all elements since we will refer to them later.¹

Selectors come in three main flavors: *type*, *attribute*, and *contextual*. These may be combined to give more complex selectors. We have already seen examples of a type selector in which the elements are selected by giving the “type,” i.e. name, of their tag. The type “*” matches any tag.

Attribute selectors choose elements based on the values of two attributes: `CLASS` and `ID`. Multiple elements may share the same `CLASS` value, while the `ID` value should be unique. Selectors may also refer to a number of pseudo-classes, in-

¹Marking all elements with `ID` attributes defeats the modularity and reuse benefits of CSS; we over-use `ID` tags here strictly as an aid to discussing our examples.

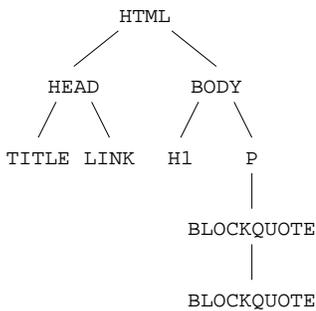


Figure 3: Document tree for the HTML of Figure 1.

cluding `:first-child` and `:link`.

Selection based on the `CLASS` and `ID` attributes provides considerable power. Using the tags `DIV` and `SPAN` the author can, respectively, group arbitrary elements into block-level and in-line elements. By setting the `CLASS` and `ID` attribute of the `DIV` and `SPAN` and providing the appropriate style rules, they can precisely control the appearance of these elements.

Contextual selectors allow the author to take into account where the element occurs in the document, i.e. its context. They are based on the document's *document tree*, which captures the recursive structure of the tagged elements. A context selector allows selection based on the element's ancestors in the document tree.

For instance, the preceding document has the document tree shown in Figure 3. If we want to ensure the innermost block quote does not have its size reduced relative to its parent, we could use

```
BLOCKQUOTE BLOCKQUOTE { font-size: 100% }
```

Less generally, we could individually override the font size for the second `BLOCKQUOTE` using an `ID` selector:

```
#Q2 { font-size: 100% }
```

Many style properties are inherited by default from the element's parent in the document tree. Generally speaking, properties that control the appearance of the element itself, such as `font-size`, are inherited, while those that control its positioning are not.

As another example, consider the HTML document shown in Figure 4. We can use a style sheet to control the width of the columns in the table. For example, `table.css` (Figure 5) contains rules specifying that the class of `medcol` and `thincol` have widths 30% and 20% of their parent table respectively.

One of the key features of CSS is that it allows multiple style sheets for the same document. Thus a document might be displayed in the context of the author's special style sheet for that document, a default company style sheet, the viewer's

```

<HTML> <HEAD>
  <TITLE>Table Example</TITLE>
  <LINK REL="stylesheet"
        HREF="table.css"
        TYPE="text/css"> </HEAD>
<BODY>
  <TABLE ID=t>
    <COL ID=c1 CLASS=medcol>
    <COL ID=c2>
    <COL ID=c3 CLASS=thincol>
  <TR>
    <TD COLSPAN=2>
      <IMG ID=i1 SRC="back.gif"></TD>
    <TD><IMG ID=i2 SRC="next.gif"></TD>
  </TR>
  <TR>
    <TD>Text1</TD>
    <TD>Text2</TD>
    <TD>Text3</TD>
  </TR>
</TABLE>
</BODY>
</HTML>

```

Figure 4: Example HTML Document

```

.medcol { width: 30% }
.thincol { width: 20% }

```

Figure 5: `table.css`

style sheet and the browser's default style sheet. This is handled in CSS by *cascading* the style sheets.

Cascading, inheritance, and multiple style sheet rules matching the same element may mean that there are conflicts among the rules as to what value a particular style property for that element should take. The exact details of which value is chosen are complex. Within the same style sheet, inheritance is weakest, and rules with more specific selectors are preferred to those with less specific selectors. For instance, both of the rules

```

#Q2 { font-size: 100% }
BLOCKQUOTE BLOCKQUOTE { font-size: 100% }

```

are more specific than

```
BLOCKQUOTE { font-size: 90% }
```

Between style sheets, the values set by the designer are preferred to those of the viewer and browser, and for otherwise equal conflicting rules, those in a style sheet that is imported or linked first have priority over those subsequently imported or linked. However, the style sheet author may also annotate rules with the strength `!important`, which will override this behavior. In this case, the viewer's style rule has precedence over the designer's style rule.

Despite its power, CSS 2.0 still has a number of limitations. One limitation is that a style property may only be relative to

the element's parent, not to other elements in the document. This can result in clumsy specifications, and makes some reasonable layout constraints impossible to express. For example, it is not possible to require that all tables in a document have the same width, and that this should be the smallest width that allows all tables to have reasonable layout. With CSS 2.0, one can only give the tables the same fixed size or the same fixed percentage width of their parent element. Similarly, it is not possible to specify that two columns in a table have the same width, and that this should be the smallest width that allows both columns to have reasonable layout.

The other main limitation is that it is difficult for the designer to write style sheets that degrade gracefully in the presence of unexpected browser and viewer limitations and desires. For instance, the author has little control over what happens if the desired font sizes are not available. Consider the style sheet `simple.css` again. Imagine that only 10 pt, 12 pt and 14 pt fonts are available. The browser is free to use 12 pt and 10 pt for headings and paragraphs respectively, or 14 pt and 12 pt or even 12 pt and 12 pt. Part of the problem is that rules always give definite values to style properties. When different style sheets are combined only one rule can be used to compute the value. Thus a rule is either on or off, leading to discontinuous behavior when style sheets from the author and viewer are combined. For instance, a sight-impaired viewer might specify that all font sizes must be greater than 11 pt. However, if the designer has chosen sufficiently large fonts, the viewer wishes to use the designer's size. This is impossible in CSS 2.0.

CONSTRAINT CASCADING STYLE SHEETS

Our solution to these problems is to use constraints for specifying layout. A constraint is simply a statement of a relation (in the mathematical sense) that we would like to have hold. Constraints have been used for many years in interactive graphical applications for such things as specifying window and page layout. They allow the designer to specify *what* are the desired properties of the system, rather than *how* these properties are to be maintained. The major advantage of using constraints is that they allow partial specification of the layout, which can be combined with other partial specifications in a predictable way. In this section, we describe our constraint-based extension to CSS 2.0, called *Constraint Cascading Style Sheets* (CCSS).

One complication is that constraints may conflict. To allow for this we use the *constraint hierarchy* formalism [3]. A constraint hierarchy consists of a collection of constraints, each labeled with a strength. There is a distinguished strength labelled REQUIRED: such constraints must be satisfied. The other strengths denote preferences. There can be an arbitrary number of such strengths, and constraints with stronger strengths are satisfied in preference to ones with weaker strengths. Given a system of constraints, the constraint solver must find a solution to the variables that satisfies the required

constraints exactly, and that satisfies the preferred constraints as well as possible, giving priority to those more strongly preferred. The choice of solution depends on the comparator function used to measure how well a constraint is satisfied. In our examples we shall assume *weighted-sum-better*. By using an appropriate set of strength labels we can model the behavior of CSS 2.0.

A Constraint View of CSS 2.0

Hierarchical constraints provide a simple, unifying way of understanding much of the CSS 2.0 specification. This viewpoint also suggests that constraint solvers provide a natural implementation technique. Each style property and the placement of each element in the document can be modeled by a variable. Constraints on these variables arise from browser capabilities, default layout behavior arising from the type of the element, from the document tree structure, and from the application of style rules. The final appearance of the document is determined by finding a solution to these constraints.

The first aspect of CSS 2.0 we consider is the placement of the document elements (i.e., page layout). This can be modeled using linear arithmetic constraints. To illustrate this, we examine table layout—one of the most complex parts of CSS 2.0. The key difficulty in table layout is that it involves information flowing bottom-up (e.g. from elements to columns) and top-down (e.g. from table to columns). The CSS 2.0 specification is procedural in nature, detailing how this occurs. By using constraints, we can declaratively specify what the browser should do, rather than how to do it. Furthermore, the constraint viewpoint allows a modular specification. For example, to understand how a complex nested table should be laid out, we simply collect the constraints for each component, and the solution to these is the answer. With a procedural specification it is much harder to understand the interaction.

Consider the style sheet `table.css` (Figure 5) and the associated HTML document (Figure 4). The associated layout constraints are shown in Figure 6. The notation $\#id[prop]$ refers to the (variable) value of the property *prop* attached to document element with ID *id*. Since we are dealing with a table, the system automatically creates a constraint (1) relating the column widths and table width.² Similarly there are automatically created constraints (2-6) that each column is wide enough to hold its content, and (7) that the table has minimal width. Constraints (8) and (9) are generated from the style sheet. Notice the different constraint strengths: from weakest to strongest they are WEAK, DESIGNER and REQUIRED. Since REQUIRED is stronger than DESIGNER, the column will always be big enough to hold its contents. The WEAK constraint $\#t[width] = 0$ cannot be satisfied completely; the effect of minimizing its error will be to minimize the width of the table but not at the expense of any of the

²For simplicity, we ignore margins, borders and padding in this example.

- | | | |
|-----|--|----------|
| (1) | $\#t[\textit{width}] = \#c1[\textit{width}] + \#c2[\textit{width}] + \#c3[\textit{width}]$ | REQUIRED |
| (2) | $\#c1[\textit{width}] \geq \textit{width}(\textit{Text1})$ | REQUIRED |
| (3) | $\#c2[\textit{width}] \geq \textit{width}(\textit{Text2})$ | REQUIRED |
| (4) | $\#c3[\textit{width}] \geq \textit{width}(\textit{Text3})$ | REQUIRED |
| (5) | $\#c3[\textit{width}] \geq \#i2[\textit{width}]$ | REQUIRED |
| (6) | $\#c1[\textit{width}] + \#c2[\textit{width}] \geq \#i1[\textit{width}]$ | REQUIRED |
| (7) | $\#t[\textit{width}] = 0$ | WEAK |
| (8) | $\#c1[\textit{width}] = 0.3 * \#t[\textit{width}]$ | DESIGNER |
| (9) | $\#c3[\textit{width}] = 0.2 * \#t[\textit{width}]$ | DESIGNER |

Figure 6: Example layout constraints

- | | | |
|-----|---|----------|
| (1) | $\#h[\textit{font-size}] \in \{9, 10, 12, 16, 36, 72\}$ | REQUIRED |
| (2) | $\#p[\textit{font-size}] \in \{9, 10, 12, 16, 36, 72\}$ | REQUIRED |
| (3) | $\#q1[\textit{font-size}] \in \{9, 10, 12, 16, 36, 72\}$ | REQUIRED |
| (4) | $\#q1[\textit{font-size}] \in \{9, 10, 12, 16, 36, 72\}$ | REQUIRED |
| (5) | $\#h[\textit{font-size}] = 13$ | DESIGNER |
| (6) | $\#p[\textit{font-size}] = 11$ | DESIGNER |
| (7) | $\#q1[\textit{font-size}] = 0.9 * \#p[\textit{font-size}]$ | DESIGNER |
| (8) | $\#q2[\textit{font-size}] = 0.9 * \#q1[\textit{font-size}]$ | DESIGNER |

Figure 7: Example finite domain constraints

other constraints.

These constraints provide a declarative specification of what the browser should do. This approach also suggests an implementation strategy: to lay out the table, we simply use a linear arithmetic constraint solver to find a solution to the constraints. The solver implicitly takes care of the flow of information in both directions, from the fixed widths of the images upward, and from the fixed width of the browser frame downward.

Linear arithmetic constraints are not the only type of constraints implicit in the CSS 2.0 specification. There are also constraints over properties that can take only a finite number of different values, including font size, font type, font weight, and color. Such constraints are called *finite domain constraints* and have been widely studied by the constraint programming community. Typically, they consist of a *domain constraint* for each variable giving the set of values the variable can take (e.g., the set of font sizes available) and required arithmetic constraints over the variables.

As an example, consider the constraints arising from the document in Figure 1 and style sheet `simple.css` (Figure 2). The corresponding constraints are shown in Figure 7. The domain constraints (1-4) reflect the browser's available fonts. The remaining constraints result from the style sheet rules. Note that the third rule generates two constraints (7) and (8), one for each block quote element.

Both of the preceding examples have carefully avoided one of the most complex parts of the CSS 2.0 specification: what

- | | |
|---|--|
| $\#h[\textit{font-size}] = 13$ | $\langle \text{DESIGNER}, 0, 0, 1 \rangle$ |
| $\#p[\textit{font-size}] = 11$ | $\langle \text{DESIGNER}, 0, 0, 1 \rangle$ |
| $\#q1[\textit{font-size}] = 0.9 * \#p[\textit{font-size}]$ | $\langle \text{DESIGNER}, 0, 0, 1 \rangle$ |
| $\#q2[\textit{font-size}] = 0.9 * \#q1[\textit{font-size}]$ | $\langle \text{DESIGNER}, 0, 0, 1 \rangle$ |
| $\#q2[\textit{font-size}] = 1.0 * \#q1[\textit{font-size}]$ | $\langle \text{DESIGNER}, 0, 0, 2 \rangle$ |

Figure 8: Example of overlapping rules

to do when multiple rules assign conflicting values to an element's style property. As discussed earlier, there are two main aspects to this: cascading several style sheets, and conflicting rules within the same style sheet.

We can model both aspects by means of hierarchical constraints. To do so we need to refine the constraint strengths we have been using. Apart from REQUIRED, each strength is a lexicographically-ordered tuple

$$\langle cs, i, c, t \rangle.$$

The first component in the tuple, *cs*, is the *constraint importance* and captures the strength of the constraint and its position in the cascade. The constraint importance is one of WEAK, BROWSER, VIEWER, DESIGNER, DESIGNER-IMPORTANT, VIEWER-IMPORTANT (ordered from weakest to strongest). The importance WEAK is used for automatically generated constraints only. The last three components in the tuple capture the specificity of the rule which generated the constraint: *i* is the number of ID attributes, *c* is the number of CLASS attributes, and *t* is the number of tag names in the rule.

As an example, consider the constraints arising from the document in Figure 1 with the style sheet

```
H1 { font-size: 13pt }
P { font-size: 11pt }
BLOCKQUOTE { font-size: 90% }
BLOCKQUOTE BLOCKQUOTE { font-size: 100% }
```

The constraints and their strengths for those directly generated from the style sheet rules are shown in Figure 8. Because of its greater weight, the last constraint listed will dominate the second to last one, giving rise to the expected behavior.

The remaining issue we must deal with is inheritance of style properties such as font size, and the expression of this inheritance within our constraint formalism. For each inherited property, we need to automatically create an appropriate constraint between each element and its parent. At first glance, these should simply be WEAK equality constraints. Unfortunately, this does not model the inherent directionality of inheritance.

For instance, imagine displaying the document in Figure 1 with the style sheet

```
BLOCKQUOTE { font-size: 8pt }
```

```

BODY[font-size] = 12           <BROWSER, 0, 0, 0>
#h[font-size] = BODY[font-size] <WEAK, 0, 0, 0>
#p[font-size] = BODY[font-size] <WEAK, 0, 0, 0>
#q1[font-size] = #p[font-size] <WEAK, 0, 0, 0>
#q2[font-size] = #q1[font-size] <WEAK, 0, 0, 0>
#q1[font-size] = 8             <DESIGNER, 0, 0, 1>
#q2[font-size] = 8             <DESIGNER, 0, 0, 1>

```

Figure 9: Example of inheritance rules

where the default font size is 12 pt. The scheme outlined above gives rise to the constraints shown in Figure 9. One possible weighted-sum-better solution to these constraints is that the heading is in 12 pt and the rest of the document (including the paragraph) is in 8 pt. The problem is that the paragraph element `#p` has “inherited” its value from its *child*, the `BLOCKQUOTE` element `#q1`.

To capture the directionality of inheritance we use *read-only* annotations [3] on variables. The intuitive understanding of a read-only variable v in a constraint c is that c should not be considered until the constraints involving v as an ordinary variable (i.e., not read-only) have been used to compute v 's value.

To model inheritance, we need to add the inheritance equalities with constraint importance of `WEAK`, and mark the variable corresponding to the parent's property as read-only. The read-only annotation ensures that the constraints are solved in an order corresponding to a top-down traversal of the document tree. Thus, the above example modifies the constraints in Figure 9 so that each font size variable on the right hand side has a read-only annotation.

Extending CSS 2.0

We have seen how we can use hierarchical constraints to provide a declarative specification for CSS 2.0. There is, however, another advantage in viewing CSS 2.0 in this light. The constraint viewpoint suggests a number of natural extensions which overcome the expressiveness limitations of CSS 2.0 discussed previously. We call this extension CCSS.

As the above examples indicate, virtually all author and viewer constraints generated from CSS 2.0 either constrain a style property to take a fixed value, or relate it to the parent's style property value. One natural generalization is to allow more general constraints, such as inequalities. Another natural generalization is to allow the constraint to refer to other variables, both variables corresponding to non-parent elements and to “global” variables.

CCSS allows constraints in the declaration of a style sheet rule. The CSS-style `attribute:value` pair is re-interpreted in this context as a constraint equation, `attribute = value`. We prepend all constraints with the constraint pseudo-property so that CCSS is backwards compatible with browsers

supporting only CSS. In a style sheet rule the constraint can refer to attributes of `self`, `parent`, and `left-sibling`. For example:

```

P { constraint:
    font-size <=
        (parent[parent])[font-size] + 2 }

```

CCSS style sheets also allow the author to introduce global constraint variables using a new `@variable` directive. A variable identifier is lexically the same as a CSS `ID` attribute. It has a type indicating its base unit, with automatic coercion between units when required. The author can express constraints among global constraint variables and element style properties using a new `@constraint` directive. There are also some global built-in objects available with their own attributes (e.g., `Browser`) that can be used.

These extensions add considerable expressive power. For instance it is now simple to specify that all tables in the document have the same width, and that this is the smallest width that allows all tables to have a reasonable layout:

```

@variable table-width:pt;
TABLE { constraint: width = table-width }

```

Similarly we can specify two columns `c1` and `c2` in the same (or different) tables have the same width (the smallest for reasonably laying out both):

```

@constraint #c1[width] = #c2[width];

```

It also allows the designer to express preferences in case the desired font is not available. For example adding

```

H1 { constraint: font-size >= 13pt }
P { constraint: font-size >= 11pt }

```

to `simple.css` (Figure 2) will ensure that larger fonts are used if 13 pt and 11 pt fonts are not available.

Finally, a sight-impaired viewer can express the strong desire to have all font sizes greater than 12 pt:

```

* {constraint: font-size >= 12pt !important}

```

As long as the font size of an element is 12 pt or larger it will not be changed, but smaller fonts will be set to 12 pt.

Providing inequality constraints allows the author to control the document appearance more precisely in the context of browser capabilities and viewer preferences. Additionally, CCSS allows the author to give alternate style sheets for the same media. Each style sheet can list preconditions for their applicability using a new `@precondition` directive. For efficiency, the precondition can only refer to various pre-defined variables. The values of these variables will be known (i.e. they will have specific values) at the time the precondition is tested. For example:

```

@precondition Browser[frame-width] >= 800px;
@precondition ColorMonitor = True;

```

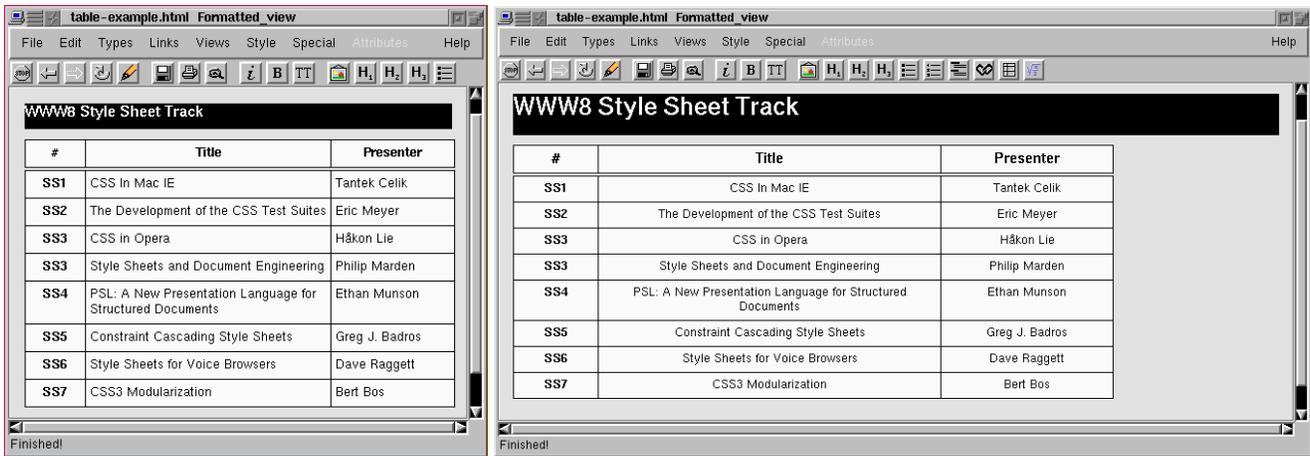


Figure 10: Screen shots of our prototype browser. In the view on the left, a narrow style sheet is in effect because the browser width ≤ 800 pixels, while on the right a wide style sheet is used. Interactively changing the browser width dynamically switches between these two presentations. In both figures, the first column is $\frac{1}{4}$ the width of the second column which is twice the width of the last column. On the left, the table consumes 100% of the frame width, but on the right, the table width is the browser width minus 200 pixels. Also notice the changes in font size and text alignment.

We extend the style sheet `@import` directive to permit listing multiple style sheets per line, and the first applicable sheet is used (the others are ignored). If no style sheet's preconditions hold, none are imported. Consider the example directive

```
@import "wide.css", "tall.css", "small.css";
```

If `wide.css`'s preconditions fail, but `tall.css`'s succeed, the layout uses `tall.css`. If, through the course of, e.g., the user resizing the top-level browser frame, `wide.css`'s preconditions later become satisfied, the layout does not switch to that style sheet unless `tall.css`'s preconditions are no longer satisfied. That is, the choice among style sheets listed with one directive is only revisited when a currently-used style sheet is no longer applicable.

As an example consider a style sheet for text with pictures. If the page is wide, the images should appear to the right of the text; if it is narrow, they should appear without text to the left; and if it is too small, the images should not appear at all. This can be encoded as:

```
/* wide.css */
@precondition Browser[frame-width] > 550px;
IMG { float: right }

/* tall.css */
@precondition Browser[frame-width] <= 600px;
@precondition Browser[frame-height] > 550px;
IMG { clear: both; float: none }

/* small.css */
IMG { display: none }
```

Preconditions become even more expressive in the presence of support for CSS positioning [10] and a generalized flow property [7].

IMPLEMENTATION

Prototype Web Browser

We have implemented a representative subset of our CCSS proposal to demonstrate the additional expressiveness it provides to web designers. Our prototype is based on version 1.4a of Amaya [8], the W3 Consortium's browser. Amaya is built on top of Thot, a structured document editor, and has partial support for CSS1. Amaya is exceptionally easy to extend in some ways (e.g., adding new HTML tags), and provides a stable base to build from.

Our support for constraints in Amaya covers the two main domains for constraints that we have discussed: table widths (for illustrating page layout relationships) and font sizes (for illustrating the solving of systems involving inherited attributes). In our prototype, HTML and CSS code can contain constraints and declare constraint variables. In HTML code, constraint variables, instead of specific values, can be attached by name to element attributes (e.g., to the "width" of a table column).³ When the constraints of the document force values assigned to variables to change, the browser updates its rendering of the current page, much as it does when the browser window is resized (which often caused the reflow in the first place).

We have also extended Amaya to support preconditions on style sheets and the generalized "`@import`" CCSS rule. The performance of switching among style sheets is similar to a reload, and when the style sheets are cached on disk, is sufficiently fast even for switching style sheets during an interactive resize.⁴ See Figure 10 for screen shots of an example

³Due to limitations in Amaya's support for style sheets, the variables must be attached to column width attributes in the HTML source instead of being specified in the style sheet.

⁴It may be useful to provide background pre-fetching of alternate style-sheets to avoid latency when they are first needed.

using our prototype's support for both table layout and pre-conditions. As the support for CSS improves in browsers, more significant variations will be possible through the use of our `@precondition` and extended `@import` directives.

We compared the performance of our prototype browser to an unmodified version of Amaya 1.4a, both fully optimized, running on a PII/400 displaying across a 10Mbit network to a Tektronix X11 server on the same subnet. Our test case was a small example on local disk using seven style sheets. We executed 100 re-loads, and measured the total wall time consumed. The unmodified browser did each re-load and re-render in 190 ms, while our prototype took only 250 ms even when sized to select the last alternative style sheet in each of three `@import` directives. This performance penalty is reasonable given the added expressiveness and features the prototype provides.

One of the most important benefits of re-framing CSS as constraints is that it provides an implementation approach for even the standard CSS features. To simplify our prototype and ensure it remains a superset of CSS functionality, we currently do not treat old-style declarations as constraints, but instead rely on the existing implementation's handling of those rules. However, if designed into a browser from the beginning, treating all CSS rules as syntactic sugar for underlying constraints will result in large savings in code and complexity. The cascading rules would be completely replaced by the constraint solver's more principled assignment of values to variables, and the display engine need only use those provided values, and redraw when the solver changes the current solution.

Constraint Solving Algorithms

The semantics of the declarative specification of the constraints are independent of the algorithms used to satisfy them. However, especially for interactive applications such as a web browser, it is essential that algorithms exist that are able to solve the constraint systems efficiently. Our implementation uses two algorithms: Cassowary [4] and a restricted version of BAFSS [12].

The Cassowary algorithm handles linear arithmetic equality and inequality constraints. The collection of constraints may include cycles (i.e. simultaneous equalities and inequalities or redundant constraints) and conflicting preferences. Cassowary is an incremental version of the simplex algorithm, a well-known and heavily studied technique for finding a solution to a collection of linear equality and inequality constraints that minimizes the value of a linear expression called the *objective function*. However, commonly available implementations of the simplex algorithm are not really suitable for interactive applications such as the browser described above. In particular, Cassowary supports the weighted-sum-better comparator for choosing a single solution from among those that satisfy all the required constraints.

A weighted-sum-better comparator computes the error for a solution by summing the product of the strength tuple and the error for each constraint that is unsatisfied. To model the CSS importance rules in a hierarchy of constraint strengths, we encode the symbolic levels of importance as tuples as well; for example, VIEWER-IMPORTANT is $\langle 1, 0, 0, 0, 0, 0 \rangle$ and BROWSER is $\langle 0, 0, 0, 0, 1, 0 \rangle$. Hence no matter what scalar error a BROWSER constraint has, it will never be satisfied if doing so would force a VIEWER-IMPORTANT constraint to not be satisfied. Similarly the last three components of the strength tuple are encoded as $\langle 10^i, 10^c, 10^t \rangle$.⁵

BAFSS handles binary acyclic font constraints using a dynamic programming approach. For the font constraints implied by CSS, we are able to simplify the algorithm because all of the constraints relate a read-only size attribute in the parent element to the size attribute of a child element. Given this additional restriction that all constraints are one-way, the algorithm is simple: visit the variable nodes in topological order and assign each a value that greedily minimizes the error contribution from that variable.

Both constraint solvers are implemented within the Cassowary Constraint Solving library [1].

RELATED WORK

The most closely related research is our earlier work on the use of constraints for web page layout [5]. This system allowed the web page author to construct a document composed of graphic objects and text. The layout of these objects and the text font size were described in a separate “layout sheet” using linear arithmetic constraints and finite domain constraints. Like CCSS, layout sheets had preconditions, controlling their applicability.

The work reported here, which focuses on how to combine constraint-based layout with CSS, is complementary to our previous research. One of the major technical contributions here is to provide a declarative semantics for CSS based on hierarchical constraints; this issue was not addressed in our prior work [5]. There are two fundamental differences between layout sheets and CCSS. The first is that layout sheets are not style sheets in the sense of CSS since they can only be used with a single document. Constraints only apply to named elements, and there is no concept of a style rule which applies to multiple elements. The second is that in the system of [5] there is no analogue of the document tree. The document is modeled as a flat collection of objects, which means that there is no notion of inheritance and almost all layout must be explicitly detailed in the layout sheet.

⁵This does not exactly match the CSS specificity rules. For example if the error in a constraint with strength $\langle \text{WEAK}, 0, 0, 1 \rangle$ is 10 times greater than the error in a conflicting constraint with strength $\langle \text{WEAK}, 0, 0, 2 \rangle$, the first constraint will affect the final solution. By choosing appropriate error functions we can make this unlikely to occur in practice. However, the more general constraint hierarchy support may actually permit more desirable interactions rather than the strict strength ordering imposed by CSS.

Cascading style sheets are not the only kind of style sheet. The Document Style Semantics and Specification Language (DSSSL) is an ISO standard for specifying the format of SGML documents. DSSSL is based on Scheme, and provides both a transformation language and a style language. It is very powerful but complex to use. More recently, W3C has begun designing the XSL style sheet for use with XML documents. XSL is similar in spirit to DSSSL. PSL [13] is another style sheet language; its expressiveness lies midway between that of CSS and XSL. The underlying application model for all three is the same: take the document tree of the original document and apply transformation rules from the style sheet in order to obtain the presentation view of the document, which is then displayable by the viewing device. In the case of XSL, the usual presentation view is an HTML document whose elements are annotated with style properties.

None of these other style sheet languages allow true constraints. Extending any of them to incorporate constraints would offer many of the same benefits as it does for CSS, namely, the ability to flexibly combine viewer, browser, and designer desires and requirements, and a simple powerful model for layout of complex objects, such as tables. The simplest extension is to allow constraints in the presentation view of the document. Providing constraints in the transformation rules would seem to offer little advantage. In the case of DSSSL a natural way to do this is to embed a constraint solver into Scheme (as in SCWM [2]). In the case of XSL, the simplest change would be to extend the presentation language from HTML to HTML with CCSS style properties.

Regarding other user interface applications of constraints, there is a long history of using constraints in interfaces and interactive systems, beginning with Ivan Sutherland's pioneering Sketchpad system [17]. Constraints have also been used in several other layout applications. IDEAL [18] is an early system specifically designed for page layout applications. Harada, Witkin, and Baraff [11] describe the use of physically-based modeling for a variety of interactive modeling tasks, including page layout. There are numerous systems that use constraints for widget layout [14, 15], while Badros [2] uses constraints for window layout.

CONCLUSIONS AND FUTURE WORK

We have demonstrated that hierarchical constraints provide a unifying, declarative semantics for CSS 2.0 and also suggest a simplifying implementation strategy. Furthermore, viewing CSS from the constraint perspective suggests several natural extensions. We call the resulting extension CCSS. By allowing true constraints and style sheet preconditions, CCSS increases the expressiveness of CSS 2.0 and, importantly, allows the designer to write style sheets that combine more flexibly and predictably with viewer preferences and browser restrictions. We have demonstrated the feasibility of CCSS by modifying the Amaya browser. However, substan-

tial work remains to develop an industrial-strength browser supporting full CCSS, in part because of Amaya's lack of support for CSS 2.0. It seems likely that the Mozilla [16] browser, with its substantial support for CSS 2.0 features, will be an excellent implementation vehicle to test our CCSS extensions once it is sufficiently stable.

Apart from improving the current implementation, we have two principal directions for further extensions to CCSS. The first is to increase the generality and solving capabilities of the underlying solver. For example, style sheet authors should be able to arbitrarily annotate variables as read-only so that they have greater control over the interactions of global variables. Additionally, virtually all CSS properties, such as color and font weight, could be exposed to the constraint solver once we integrate other algorithms into our solving toolkit.

The second extension is to allow “predicate” selectors in style sheet rules. These selectors would permit an arbitrary predicate to be tested in determining the applicability of a rule to an element in the document structure tree. Predicate selectors can be viewed as a generalization of the existing selectors; an $H1 P$ selector is applied only to nodes n for which the predicate “ $n[\text{type}] = P$ and $\exists m$ parent-of n such that $m[\text{type}] = H1$ ” holds. These predicate selectors would allow the designer to take into account the attributes of the selected element's parents and children, thus, for instance, allowing the number of items in a list to affect the appearance of the list (as in an example used to motivate PSL [13]).

A final important area for future work is the design, implementation, and user testing of graphical interfaces for writing and debugging constraint cascading style sheets and web pages that use them.

ACKNOWLEDGMENTS

We thank Bert Bos and Håkon Lie of the CSS group of the W3 Consortium for early feedback on these ideas and our proposed extensions to CSS. This research has been funded in part by a US National Science Foundation Graduate Fellowship for Greg Badros, and in part by a grant from the Australian Research Council.

REFERENCES

1. Greg Badros and Alan Borning. The Cassowary linear arithmetic constraint solving algorithm: Interface and implementation. Technical Report UW-CSE-98-06-04, University of Washington, Seattle, Washington, June 1998.
2. Greg Badros and Maciej Stachowiak. Scwm—The Scheme Constraints Window Manager. Web page, 1997–1999. <http://vicarious-existence.mit.edu/scwm/>.
3. A. Borning, B. Freeman-Benson, and M. Wilson. Constraint hierarchies. *Lisp and Symbolic Computation*, 5(3):223–270, September 1992.

4. A. Borning, K. Marriott, P. Stuckey, and Y. Xiao. Solving linear arithmetic constraints for user interface applications. In *Proceedings of the 10th ACM Symposium on User Interface Software and Technology*, pages 87–96, 1997.
5. Alan Borning, Richard Lin, and Kim Marriott. Constraints for the web. In *Proceedings of 1997 ACM Multimedia Conference*, 1997.
6. Bert Bos, Håkon Wium Lie, Chris Lilley, and Ian Jacobs. Cascading style sheets, level 2. W3C Working Draft, January 1998. <http://www.w3.org/TR/WD-css2/>.
7. Bert Bos, Dave Raggett, and Håkon Lie. Frame-based layout via style sheets. W3C Working Draft. <http://www.w3.org/TR/WD-layout>.
8. W3 Consortium. Amaya web browser software. Web page, October 1998. <http://www.w3.org/Amaya>.
9. W3 Consortium. HTML 4.0 specification. Technical report, W3 Consortium, 1998. <http://www.w3.org/TR/REC-html40>.
10. Scott Furman and Scott Isaacs. Positioning HTML elements with cascading style sheets. W3C Working Draft. <http://www.w3.org/TR/WD-positioning>.
11. Mikako Harada, Andrew Witkin, and David Baraff. Interactive physically-based manipulation of discrete/continuous models. In *SIGGRAPH '95 Conference Proceedings*, pages 199–208, Los Angeles, August 1995. ACM.
12. Richard Lin, Kim Marriott, and Peter J. Stuckey. Flexible font-size specification in web documents. In *Proceedings of the 22 Australasian Computer Science Conference*, Auckland, New Zealand, January 1999.
13. Philip M. Marden, Jr. and Ethan V. Munson. PSL: An alternate approach to style sheet languages for the world wide web. *Journal of Universal Computer Science*, 4(10), 1998. <http://www.cs.uwm.edu/multimedia>.
14. Brad A. Myers, Dario A. Giuse, Roger B. Dannenberg, Brad Vander Zanden, David S. Kosbie, Edward Pervin, Andrew Mickish, and Philippe Marchal. Garnet: Comprehensive support for graphical highly interactive user interfaces. *IEEE Computer*, November 1990.
15. Brad A. Myers, Richard G. McDaniel, Robert C. Miller, Alan S. Ferreny, Andrew Faulring, Bruce D. Kyle, Andrew Mickish, Alex Klimovitski, and Patrick Doane. The Amulet environment: New models for effective user interface software development. *IEEE Transactions on Software Engineering*, 23(6):347–365, June 1997.
16. The Mozilla Organization. Mozilla web browser project. Web page, 1999. <http://www.mozilla.org>.
17. I. Sutherland. Sketchpad: A man-machine graphical communication system. In *Proceedings of the Spring Joint Computer Conference*, pages 329–346. IFIPS, 1963.
18. Christopher J. van Wyk. A high-level language for specifying pictures. *ACM Transactions on Graphics*, 1(2):163–182, April 1982.